Eurborn CO.,LTD.
Office Address(HK):20/F KA WAH BANK CENTRE 232 DES VOEUX
ROAD CENTRAL HK
Tel: +852-3560 8169
Fax: +852-3020 6850

Office Address: Room 702,Huihai Building,No.430 Dongguan Avenue,
Nancheng District,Dongguan City,Guangdong Province,China
Tel : +86 769 23022798
Fax : +86 769 23022799

Factory Address:No.6,Hongshi Road,Ludong District,Humen Town,
Dongguan City,Guangdong Province,China.
Tel: +86-769-8523 2755
Fax: +86-769-8523 2835

E-mail : info@eurborn.com

The catalogue is subject to change without further notice.

EURBORN® 2020 CATALOGUE

埃本®

EURBORN®

2020 CATALOGUE-I

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

EURBORN®

EURBORN, AS ITS NAME IS UNIQUE IN THE MARKET WITH PLETHORA OF COMPETITORS.

ABOUT US

Eurborn Co.,Ltd,it was established in 2006,Obtained Nemko,IS09001:2015 certified production of high-power LED lamps and plastic mold design and manufacture of professional manufacturers.It has 125 employees,including 20 technical staff.In addition,the company plant area of 5400 square meters,including an area of 650 square meters of clean room.

Our company is a company with strong production capacity of the scale enterprises,with 4 automatic production lines, three semi-automatic production lines, 12 injection molding machines and 8 metal machinery, CNC mold multiple professional equipment.Meanwhile, the company has a strong management team and a solid strong technical strength.

Our company also have a strong influence in industry on product sales,Production marketing covers Europe, America, Australia, welcomed by Most customers. We insist:customer first, reputation for service, manage for efficiency, innovation for development, quality for market, Confirm to market changes and make the greatest efforts to meet customer demand responsibility.

CONTENTS

07-80 GROUND LIGHT

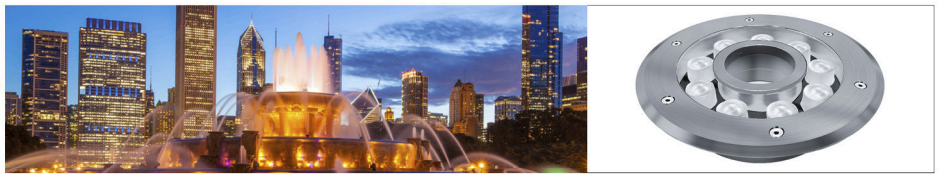

83-86 FOUNTAIN LIGHT

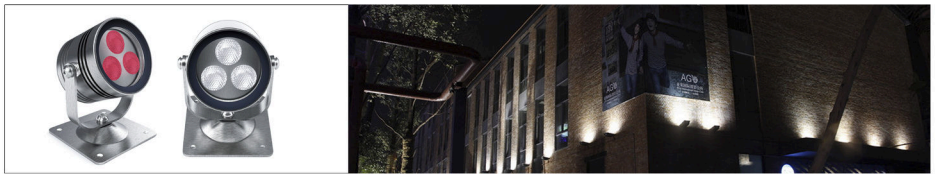

89-112 SPOT LIGHT

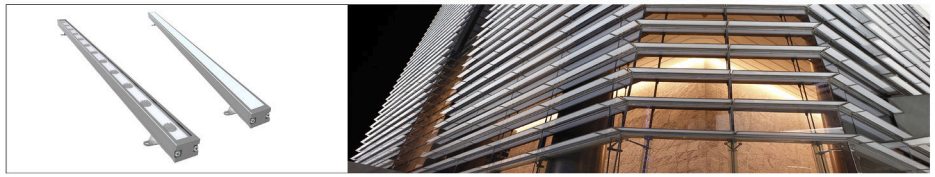

115-126 LINE LIGHT

129-132 LED COMPONENTS

Eurborn®

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

135-154 WALL LIGHT

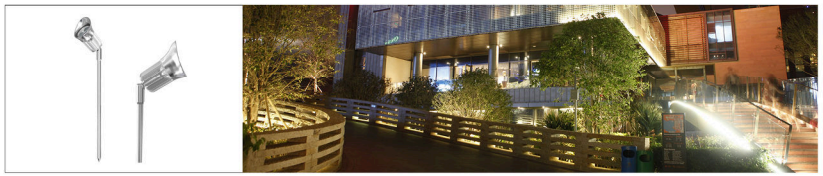

157-162 SPIKE LIGHT

165-170 QUICK INSTALL LIGHT

173-185 ACCESSORIES

EURBORN®

GROUND LIGHT

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

TS1960

EU1960

Marine grade 316 stainless steel fixture complete with integral CREE LED package. Fixture rated to IP68. Suitable for the illumination of small/medium trees, building exteriors, columns if the voltage less than 18W. Above 18W, the luminaires may only be operated under water, recessed luminaires for private and public swimming pools. Underwater luminaires in various sizes and light outputs for installation in concrete, foil, metal or synthetic pools. To avoid harmful deposits and dirt on the luminaires, the water must have a neutral pH value and must be free of components that attack metal.

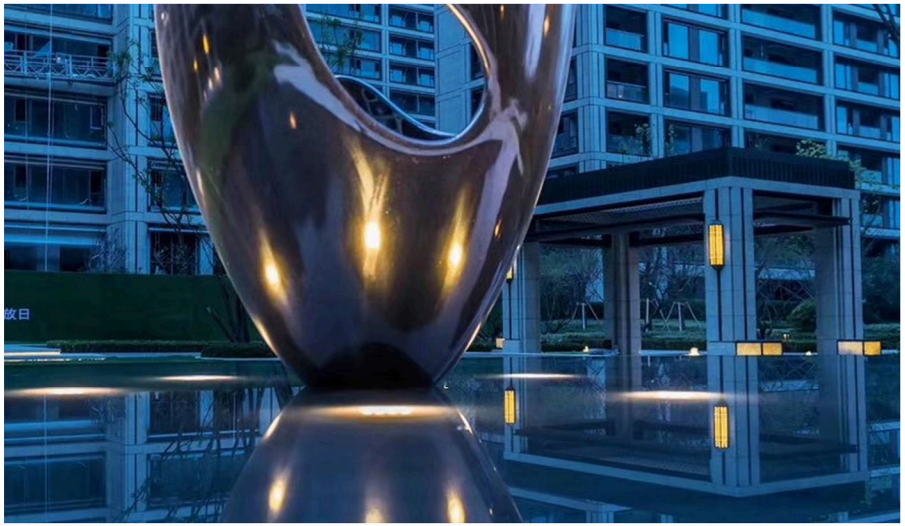

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+SUS316(Lamp cup)
Optics	20° / 60° (10° / 30° / 45°)
Power	12W
Power supply	N/A
Dimention	D173XH50(H71)
Weight	1.48kg
IP Rating	IP68
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	YES
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1960	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20/F60 (10/30/45)	Constant current	350mA	Series	3M 2X0.75mm² Cable	12W	1000LM	D173XH50	D155
EU1960D	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	13W	1000LM	D173XH50	D155
EU1960D-M	OSRAM	CW,WW,NW,Red, Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	3M 4X0.5mm² Cable	13W	500LM	D173XH50	D155
EU1960DMX	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 2X0.75mm² Cable	13W	1000LM	D173XH50	D155
* EU1960D-24W	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 2X0.75mm² Cable	24W	2000LM	D173XH50	D155
* EU1960D-36W	CREE	CW,WW,NW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	36W	2800LM	D173XH50	D155
EU1960DMX-RGB	Edison	RGB,RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	13W	N/A	D173XH50	D155
* EU1960DMX-24W-RGB	Edison	RGB,RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	24W	N/A	D173XH50	D155
* EU1960DMX-36W-RGBW	Edison	RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	36W	N/A	D173XH50	D155

* Underwater use only

*IES Data support.





LED Colours

White 3000K White 4000K White 6000K RGB

EU1920

Marine grade 316 stainless steel fixture complete with integral CREE LED package. Fixture rated to IP68. Suitable for the illumination of small/medium trees, building exteriors, columns if the voltage less than 9W. Above 9W, The luminaires may only be operated under water, recessed luminaires for private and public swimming pools. Underwater luminaires in various sizes and light outputs for installation in concrete, foil, metal or synthetic pools. To avoid harmful deposits and dirt on the luminaires, the water must have a neutral pH value and must be free of components that attack metal.

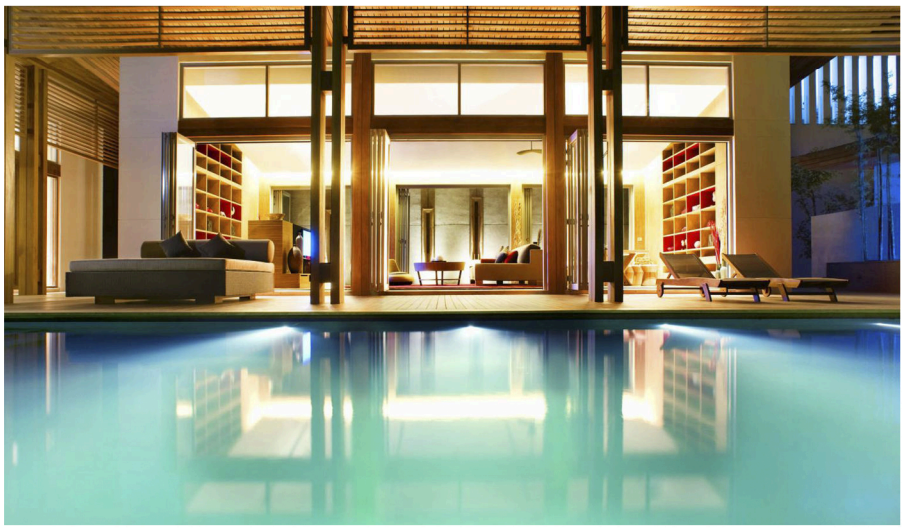

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	10° / 45° (30° / 60°)
Power	6W
Power supply	N/A
Dimention	D107 X H47
Weight	0.8kg
IP Rating	IP68
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible





Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1920	CREE	CW,WW,NW,Red, Green,Blue,Amber	S10/F45(30/60)	Constant current	350mA	Series	3M 2X0.75mm² Cable	6W	500LM	D107XH47	D95
EU1920D	CREE	CW,WW,NW,Red, Green,Blue,Amber	S10/F45(30/60)	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6.5W	500LM	D107XH47	D95
EU1920DMX	CREE	CW,WW,NW,Red, Green,Blue,Amber	S10/F45(30/60)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	6.5W	500LM	D107XH47	D95
EU1920DMX-RGB	EDISON	RGB	S10/F45(30/60)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	6.5W	N/A	D107XH47	D95

*IES Data support.

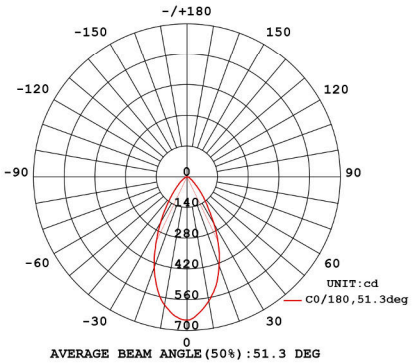



LED Colours



White 3000K White 4000K White 6000K RGB

EU1965H

Marine grade 316 stainless steel panel with aluminum lamp body. This fixture complete with integral CREE led package. Tempered glass, construction rated to IP67. Recessed light source and black baffle serve to minimize glare.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	20° / 60°
Power	6W
Power supply	N/A
Dimention	D60XH53
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape

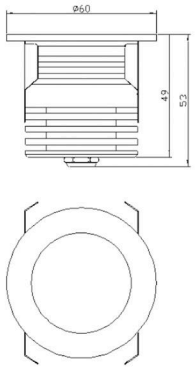

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1965H	CREE	CW,WW,NW	S20/F60	Constant current	550mA@11.3VDC	Series	3M 2X0.75mm² Cable	6W	500LM	D60XH53	D50
EU1965HD	CREE	CW,WW,NW	S20/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6W	500LM	D60XH53	D50

*IES Data support.

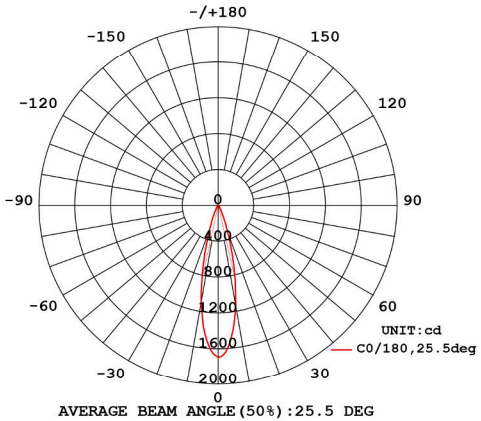

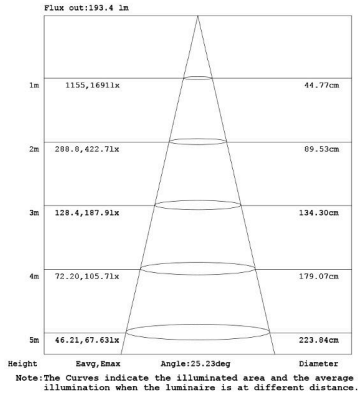

LED Colours

White 3000K White 4000K White 6000K

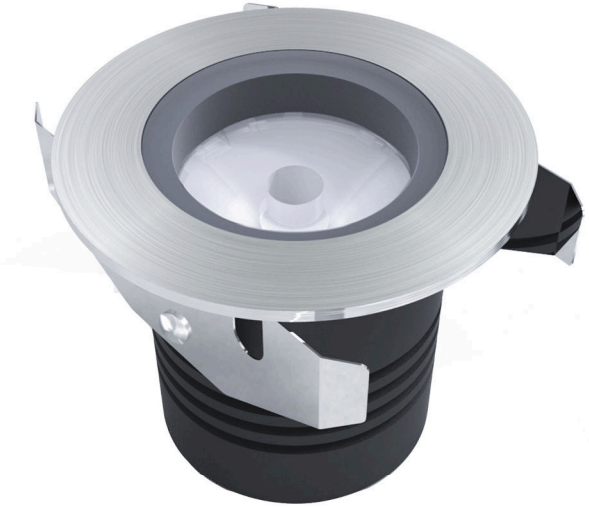

EU1968

Marine grade 316 stainless steel panel with aluminum lamp body. This fixture complete with integral CREE led package. Tempered glass, construction rated to IP67.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	3°
Power	7W
Power supply	N/A
Dimention	D90xH75
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1968	CREE	CW,WW,NW	3°	Constant current	600mA@11.3VDC	Series	3M 2X0.75mm² Cable	7W	600LM	D90 X H75	D70
EU1968D	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	7.5W	600LM	D90 X H75	D70
EU1968DMX	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	3M 4X0.5mm² Cable	7.5W	600LM	D90 X H75	D70

*IES Data support.

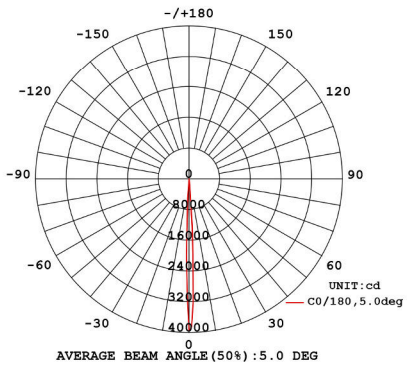

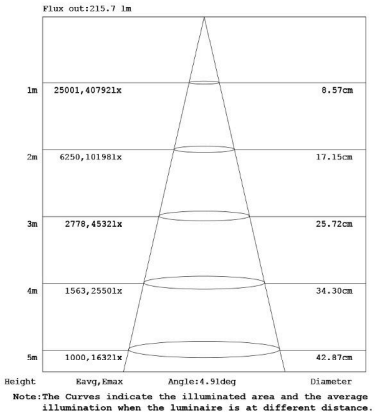

LED Colours

White 3000K White 4000K White 6000K

BL100

Marine grade 316 stainless steel surface mounted fixture complete with high power CREE LED package.Tempered glass, fixture rated to IP68 allowing to use on yachts, ships.With high strength, extra-thick tempered glass,the product has an IK10 (protection against shock up to 20 joules). Able to withstand harsh environments.Maximum hull thickness:<100mm (~ 3.9")

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	F40°
Power	15W / 20W
Power supply	12VDC(12-30VDC)
Dimention	D100X142
Weight	1650g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/ Submersible/Yachting
Optional brand	CREE

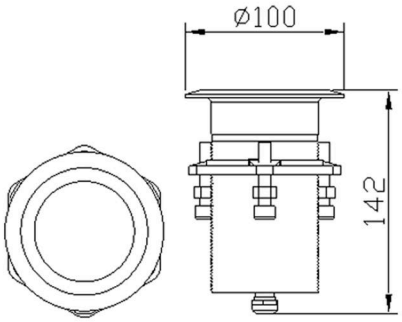

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
BL100D	CREE	CW	F40	Constant voltage	12VDC	Parallel	1.1M 2X0.75mm² Cable	20W	1500LM	D100X142	D75
BL100D	CREE	Blue	F40	Constant voltage	12VDC	Parallel	1.1M 2X0.75mm² Cable	15W	500LM	D100X142	D75

*IES Data support.

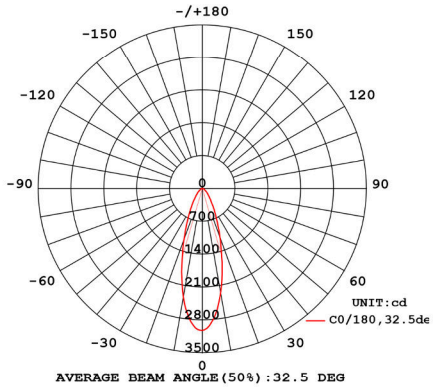

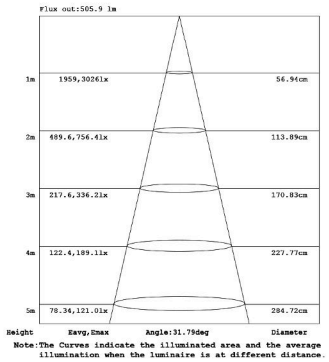

LED Colours

White 3000K White 4000K White 6000K

GL310

Recessed linear fixture rated to IP67.15/20/30/45/60 degree beam Options.Wall/floor-recessed luminaire for use with fluorescent lamps and LEDs.Tempered glass with integrated CREE XPE LED chipset.Luminaire ready for pass-through wiring.

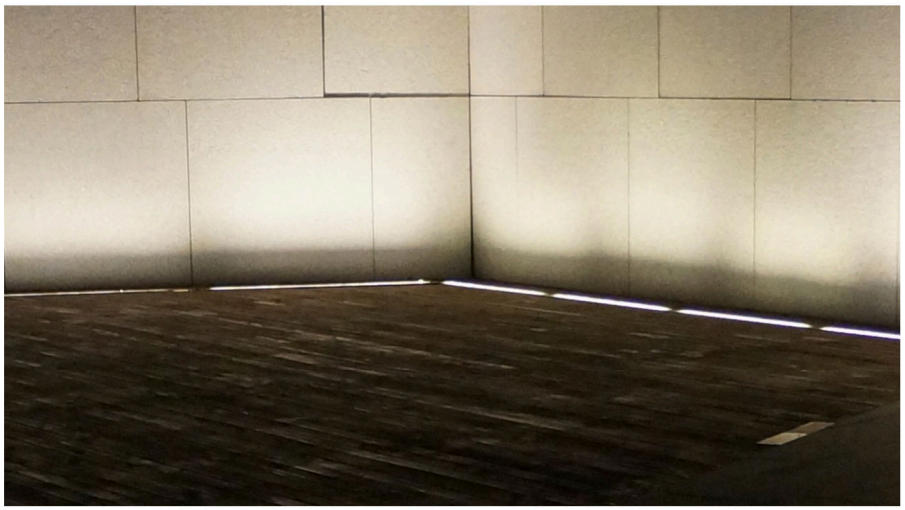

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	15° / S20° / 30° / 45° / F60°
Power	12W
Power supply	350mA or 24VDC
Dimention	550X76Xh29
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

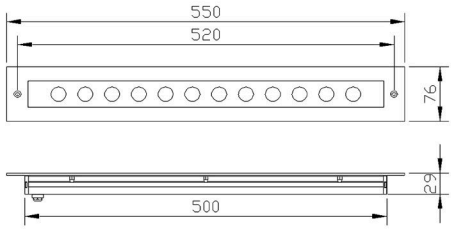

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL310	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	Constant current	350mA	Series	0.5M 2X0.75mm² Cable or 0.2M Plug	12W	800LM	550X76XH29	505X60
GL310D	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	13W	800LM	550X76XH29	505X60
GL310M	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant current	350mA	Series	0.5M 2X0.75mm² Cable or 0.2M Plug	12W	500LM	550X76XH29	505X60
GL310DM	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	13W	500LM	550X76XH29	505X60
GL310RGB	CREE	4R+4G+4B	15/S20/30/45/F60	Constant current	350mA	Series	0.5M 4X0.5mm² Cable or 0.2M Plug	12W	N/A	550X76XH29	505X60
GL310DMX-RGB	Edison	RGB(Fullcolor)	15/S20/30/45/F60	Constant voltage	24VDC DMX Controller	Parallel	0.5M 4X0.5mm² Cable or 0.2M Plug	13W	N/A	550X76XH29	505X60

DMX decoder in built

*IES Data support.
*Length and power could be customized.

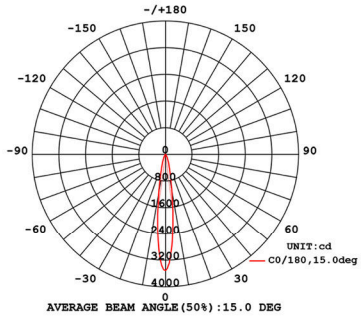



LED Colours



White 3000K White 4000K White 6000K RGB

TS240

GL240

Marine grade 316 stainless steel bezel panel with aluminum lamp Body,Tempered glass,In-ground floodlight fixture complete with Integral CREE LED package.10/20/40/60 degree beam options.No Mechanical joints to light source ensures robust protection against Water ingress.product runs cool meeting all touch temperature Requirements.Suitable for the illumination of small/medium trees.

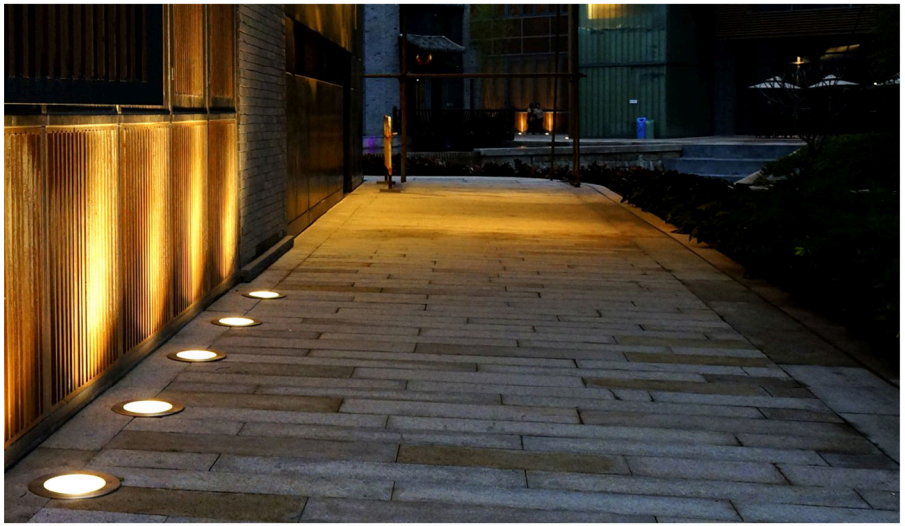

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	10° / S20° / 40° / F60°
Power	24W
Power supply	N/A
Dimention	D248X55
Weight	3.25kg
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape

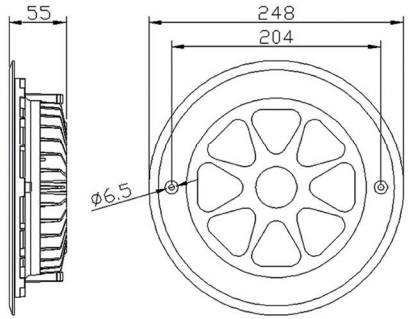

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL240	CREE	CW,WW, NW,Red, Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	24W	2200LM	D248X55	D225
GL240D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	26W	2200LM	D248X55	D225
GL240DM	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	18W	1400LM	D248X55	D225
GL240RGB	CREE	8R+8G+8B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	24W	N/A	D248X55	D225
GL240DMX-RGB	CREE	8R+8G+8B	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	26W	N/A	D248X55	D225

DMX decoder in built

*IES Data support.

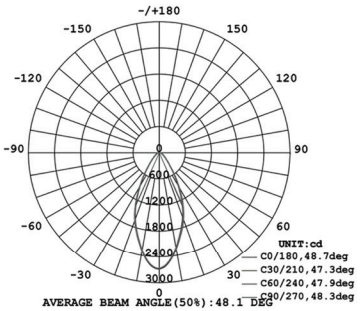



LED Colours



White 3000K White 4000K White 6000K RGB

TS180

GL180

Marine grade 316 stainless steel bezel panel with aluminum lamp Body,Tempered glass,this fixture complete with integral CREE LED package.Fixture rated to IP67 with no mechanical joints to light source ensures robust protection against Water ingress.10/20/40/60 degree beam options.product runs cool meeting all touch temperature requirements.Suitable for the illumination of small/medium trees.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	10° / S20° / 40° / F60°
Power	18W
Power supply	N/A
Dimention	D175X51
Weight	1.7KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL180	CREE	CW,WW, NW,Red, Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	18W	1700LM	D175X51	D155
GL180D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	20W	1700LM	D175X51	D155
GL180RGB	CREE	6R+6G+6B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	18W	N/A	D175X51	D155
GL180DMX-RGB	CREE	6R+6G+6B	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	D175X51	D155
GL180DMX-RGB	Edison	RGB(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	D175X51	D155
GL180DMX-RGBW	Edison	RGBW(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	D175X51	D155

DMX decoder in built

*IES Data support.

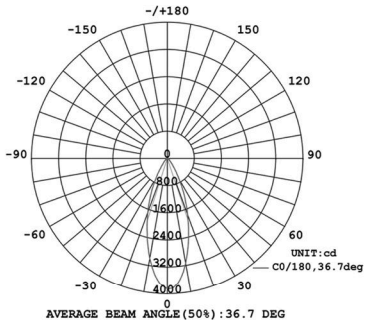



LED Colours



White 3000K White 4000K White 6000K RGB

TS180

GL120

Marine grade 316 stainless steel bezel panel with aluminum lamp Body,Tempered glass,this fixture complete with integral CREE LED package.Fixture rated to IP67 with no Mechanical joints to light source ensures robust protection against Water ingress.10/20/40/60 degree beam options.product runs cool meeting all touch temperature requirements.Suitable for the illumination of small/medium trees.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	10° / S20° / 40° / F60°
Power	12W
Power supply	N/A
Dimention	D175X51
Weight	1.7KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL120	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	12W	1300LM	D175X51	D155
GL120D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	13W	1300LM	D175X51	D155
GL120DM	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	12W	650LM	D175X51	D155
GL120RGB	CREE	4R+4G+4B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	12W	N/A	D175X51	D155
GL120DMX-RGB	CREE	4R+4G+4B	10/S20/40/F60	Constant voltage	4VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	D175X51	D155
GL120DMX-RGB	Edison	RGB(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	D175X51	D155
GL120DMX-RGBW	Edison	RGBW(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	D175X51	D155

DMX decoder in built

*IES Data support.

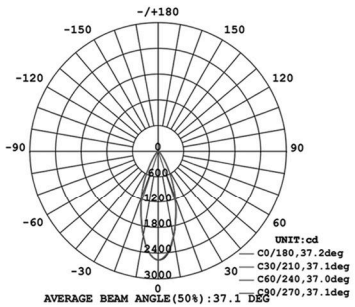



LED Colours



White 3000K White 4000K White 6000K RGB

TS080
Optional accessories

GL080

Marine grade 316 stainless steel bezel panel with aluminum lamp body,This fixture complete with integral CREE LED package.Tempered glass,Fixture rated to IP67 with no mechanical joints to light source ensures robust protection against Water ingress.10/20/40/60 degree beam options.product runs cool meeting all touch temperature requirements.Suitable for the illumination of small/medium trees.

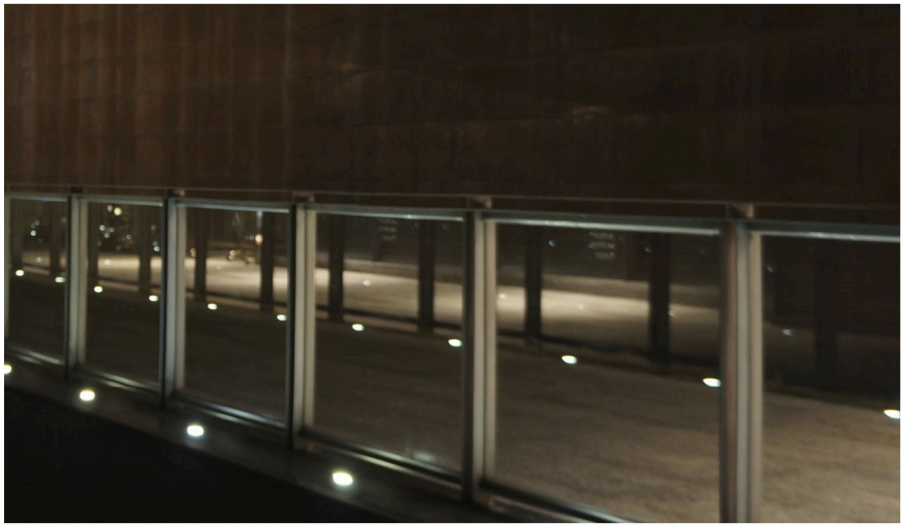

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminium(Lamp cup)
Optics	10° / S20° / 40° / F60°
Power	6x1W
Power supply	N/A
Dimention	D107xH52
Weight	1.1KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape

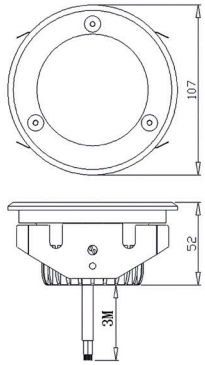

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL080	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm2 Cable	6W	500LM	D107 X H52	D95
GL080D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm2 Cable	6.5W	500LM	D107 X H52	D95
GL080-3W	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm2 Cable	3W	300LM	D107 X H52	D95
GL080D-3W	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm2 Cable	3.5W	300LM	D107 X H52	D95
GL080M	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant current	350mA	Series	3M 2X0.75mm2 Cable	6W	500LM	D107 X H52	D95
GL080RGB	CREE	2R+2G+2B	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm2 Cable	6W	N/A	D107 X H52	D95
GL080DMX-RGB	CREE	2R+2G+2B	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm2 Cable	6.5W	N/A	D107 X H52	D95
GL080DMX-RGB	Edison	RGB(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm2 Cable	6.5W	N/A	D107 X H52	D95
GL080DMX-RGBW	Edison	RGBW(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm2 Cable	6.5W	N/A	D107 X H52	D95

DMX decoder in built

*IES Data support.





LED Colours



White 3000K White 4000K White 6000K RGB

TS112

Optional accessories

GL112

Miniature recessed fixture complete with integral CREE LED Package and 20/60 degree beam options.Marine Grade 316 Stainless Steel option with construction rated to IP68.Tempered glass,with patented cable waterproof design,Product footprint of 23mm diameter ensures versatile application.Inline driver options Include switched,1-10V and DALI dimmable solutions.

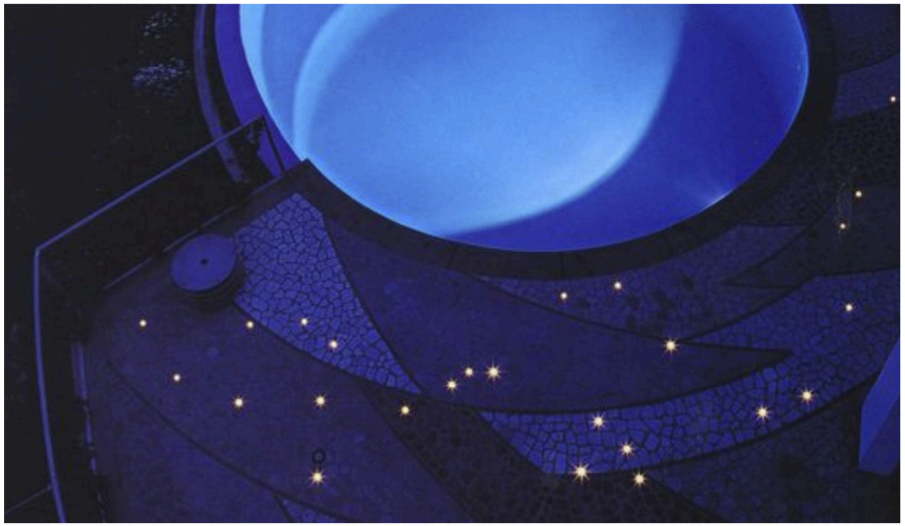

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20°/F60°
Power	1W
Power supply	N/A
Dimention	D23X40
Weight	60g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

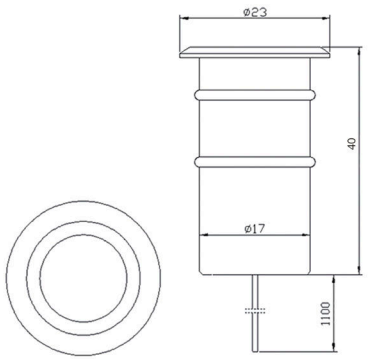

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL112	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4MM^2 Cable	1W	100LM	D23X40	D19
GL112D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4MM^2 Cable	1.3W	100LM	D23X40	D19
GL112M	CREE / OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12VDC	Parallel	1.1M 2X0.4MM^2 Cable	0.5W	30LM	D23X40	D19
GL112RGB	Edison	RGB	120	Constant voltage	12VDC	Parallel	1.1M 4X24AWG Cable	0.5W	N/A	D23X40	D19

*IES Data support.

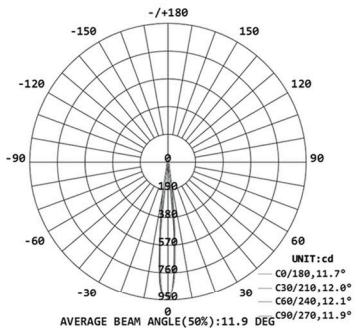



LED Colours



White 3000K White 4000K White 6000K RGB

TS112

Optional accessories

GL112H

Miniature recessed fixture complete with integral CREE LED Package and 20/60 degree beam options.Tempered glass withUltra low-glare,IP68 ground light is made of marine Grade 316 Stainless Steel .Product footprint of 23mm diameter ensures versatile application .Inline driver options include switched ,1-10V and DALI dimmable solutions .

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	D23X40
Weight	60g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

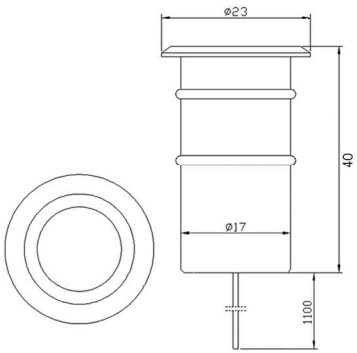

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL112H	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4MM^2 Cable	1W	100LM	D23x40	D19
GL112HD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4MM^2 Cable	1.3W	100LM	D23x45	D19

*IES Data support.

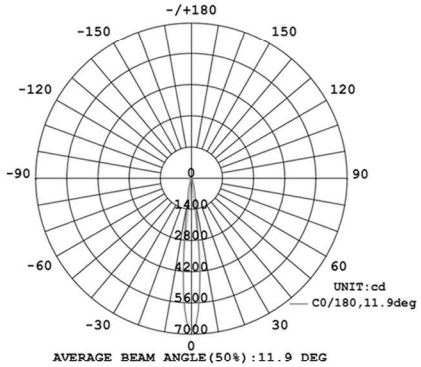



LED Colours



White 3000K White 4000K White 6000K RGB

TS116
Optional accessories

GL116

Miniature recessed fixture complete with integral CREE LED Package and 12/45 degree beam options . Tempered glass ,Marine grade 316 Stainless Steel construction rated to IP68 .Product footprint of 60mm diameter ensures versatile application .Inline driver options include switched , 1-10V and DALI dimmable solutions .

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S12° / F45°
Power	1W
Power supply	N/A
Dimention	D60X45
Weight	465g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL116	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	D60X45	D50
GL116D	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	100LM	D60X45	D50
GL116C	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	D60X45	D50
GL116RGB	Edison	RGB	45	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	3W	N/A	D60X45	D50
GL116DMX-RGB	Edison	RGB	S12/F45	Constant voltage	24VDC DMX	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	D60X45	D50

DMX decoder in built

*IES Data support.

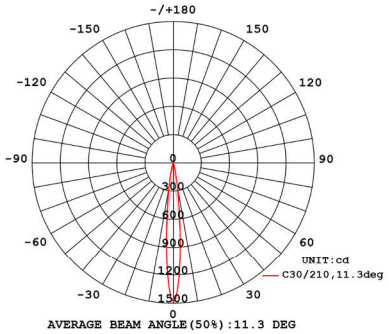



LED Colours



White 3000K White 4000K White 6000K RGB

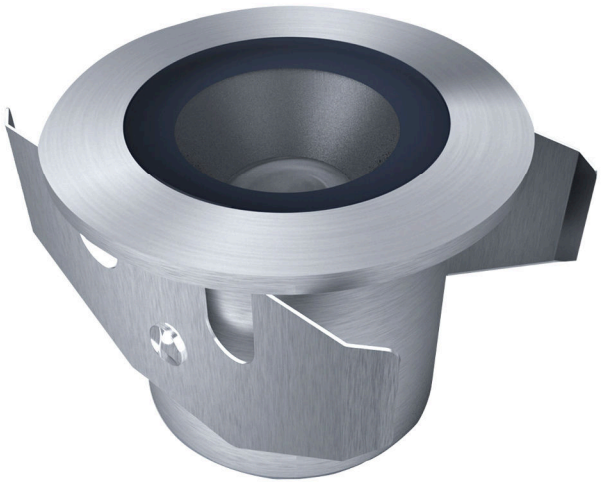

TS116

Optional accessories

GL116H

Miniature recessed fixture complete with integral CREE LED Package and 20/60 degree beam options . Tempered glass ,Marine grade 316 Stainless Steel option with construction Rated to IP68 Recessed light source and black baffle serve to Minimize glare.Product footprint of 60mm diameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions .

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	D60x45
Weight	465g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL116H	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	D60X45	D50
GL116HD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	100LM	D60X45	D50

*IES Data support.

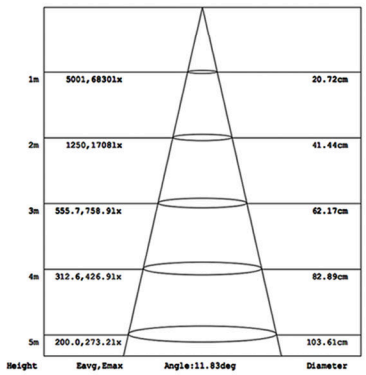

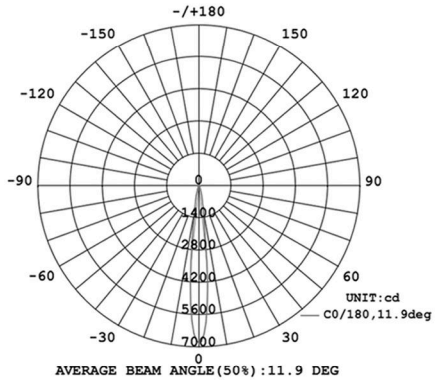

LED Colours

White 3000K White 4000K White 6000K

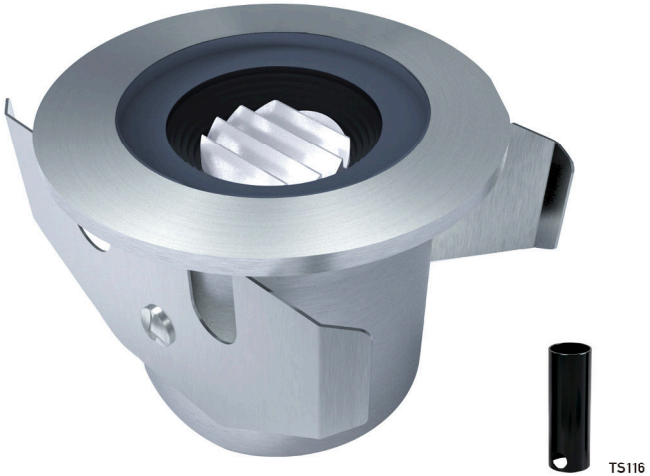

Optional accessories

GL116Q

Miniature recessed fixture complete with integral CREE LED Package and S25X45/F20X50 degree beam options. Tempered glass ,marine grade 316 Stainless Steel option with construction Rated to IP68 Recessed light source and black baffle serve to minimize glare.Product footprint of 60mm diameter ensures versatile application . Inline driver options include switched,1-10V and DALI dimmable solutions.Side-entry option also available.

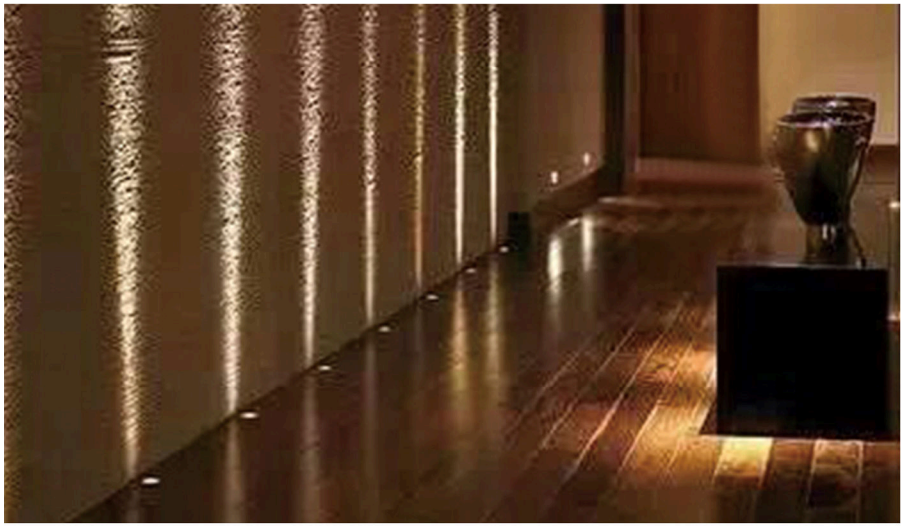

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S25X40° / F20X50°
Power	1W
Power supply	N/A
Dimention	D60x45
Weight	465g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

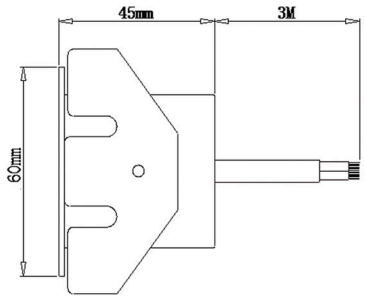

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL116Q	CREE	CW,WW, NW,Red Green,Blue,Amber	S25X40/F20X50	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	D60X45	D50
GL116QD	CREE	CW,WW, NW,Red Green,Blue,Amber	S25X40/F20X50	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	100LM	D60X45	D50

*IES Data support.

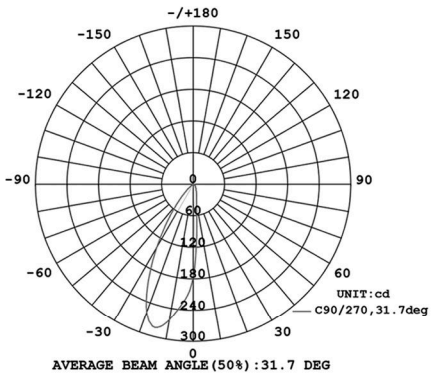



LED Colours



White 3000K White 4000K White 6000K RGB

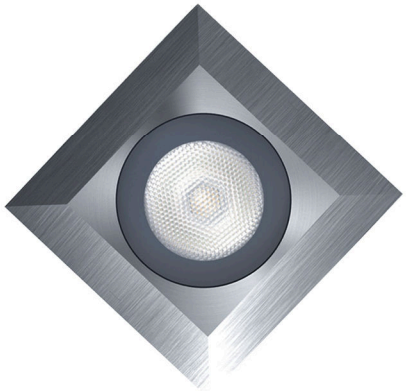

TS116
Optional accessories

GL116SQ

Square recessed fixture complete with integral CREE LED package and 12/45 degree beam options. Tempered glass, marine grade 316 Stainless Steel option with construction rated to IP68. Small Product footprint ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S12° / F45°
Power	1W
Power supply	N/A
Dimention	65x65x45
Weight	490g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible





Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL116SQ	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	65x65x45	D50
GL116SQD	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	100LM	65x65x45	D50
GL116SQ-RGB	Edison	RGB	45	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	3W	N/A	65x65x45	D50
GL116SQ-DMX-RGB	Edison	RGB	S12/F45	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	65x65x45	D50

DMX decoder in built

*IES Data support.



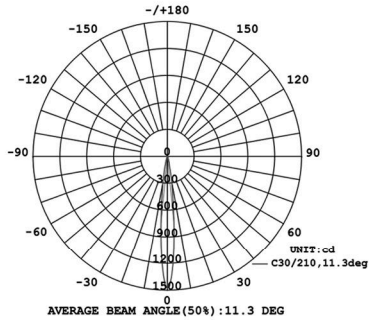

LED Colours



White 3000K White 4000K White 6000K RGB

GL118

Miniature recessed fixture complete with integral CREE LED package.Tempered glass ,frosted optic serves to minimize glare coupled with a diffuse beam distribution.Marine Grade 316 Stainless Steel option with construction rated to IP68. Product footprint of 36mm diameter ensures versatile application.

DESCRIPTION

LED Light source	LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316 / Brass
Optics	120°
Power	1W
Power supply	N/A
Dimention	D36X37
Weight	260g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

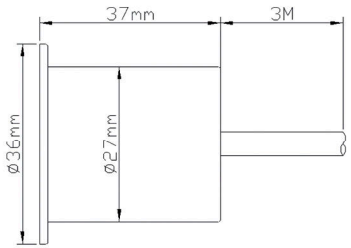

MODEL NO.	LED Brand	Color	BEAM	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize	Material
GL118	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm2 Cable	1W	20LM	D36X37	D29	SUS316
GL118AB	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm2 Cable	1W	20LM	D36X37	D29	Brass
GL118RGB	EDISON	RGB	120	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D36X37	D29	SUS316
GL118AB RGB	EDISON	RGB	120	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D36X37	D29	Brass

*IES Data support.



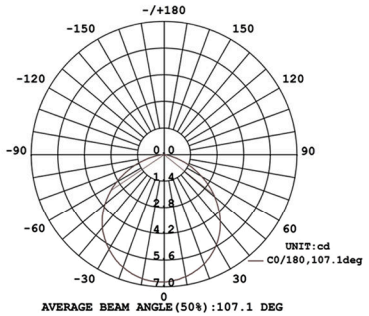

LED Colours



White 3000K White 4000K White 6000K RGB

TS118T
Optional accessories

GL118T

Miniature recessed fixture complete with integral CREE LED package.Tempered glass,frosted optic serves to minimize glare coupled with a diffuse beam distribution.Marine Grade 316 Stainless Steel option with construction rated to IP68.Bronze option.Product footprint of 36mm diameter ensures versatile application.

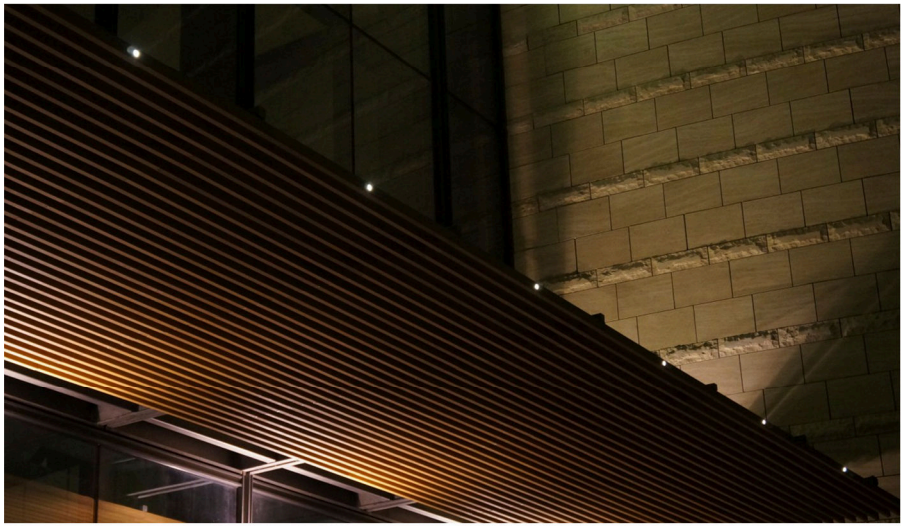

DESCRIPTION

LED Light source	LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316 / Brass
Optics	120°
Power	1W
Power supply	N/A
Dimention	D36X37
Weight	280g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

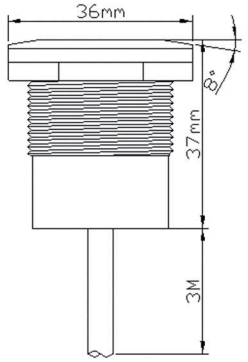

MODEL NO.	LED Brand	Color	BEAM	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize	Material
GL118T	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	1W	20LM	D36X37	D29	SUS316
GL118TAB	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	1W	20LM	D36X37	D29	Brass
GL118TRGB	Edison	RGB	120	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D36X37	D29	SUS316
GL118TAB RGB	Edison	RGB	120	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D36X37	D29	Brass

*IES Data support.



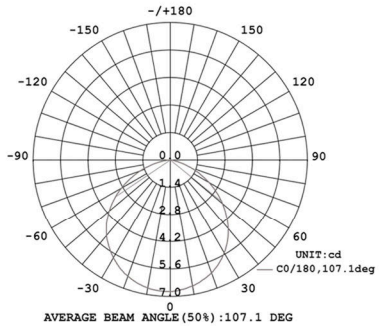

LED Colours



White 3000K White 4000K White 6000K RGB

TS119
Optional accessories

GL119

Miniature recessed fixture complete with integral CREE LED package.Tempered glass,marine grade 316 Stainless Steel Option with construction rated to IP68.Product footprint of 40mm diameter ensures versatile application .Inline driver options Include switched,1-10V and DALI dimmable solutions.

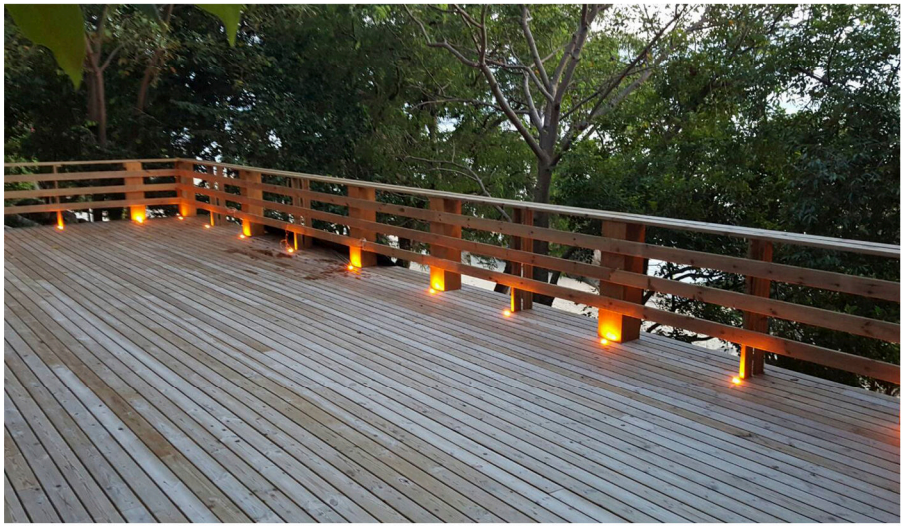

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	D40X40
Weight	140g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

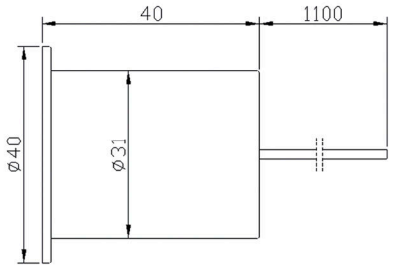

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL119	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	D40X40	D33
GL119D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	100LM	D40X40	D33

*IES Data support.

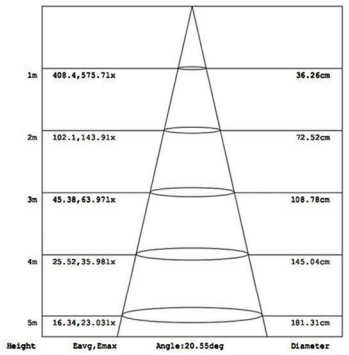

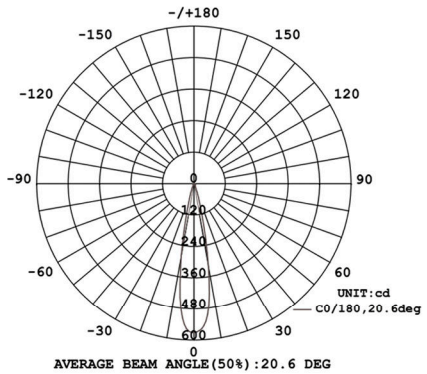

LED Colours

White 3000K White 4000K White 6000K

TS119T
Optional accessories

GL119T

Miniature recessed fixture complete with integral CREE LED package. Tempered glass, marine grade 316 Stainless Steel Option with constuction rated to IP68.Product footprint of 40mmdiameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimenton	D40X40
Weight	150g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

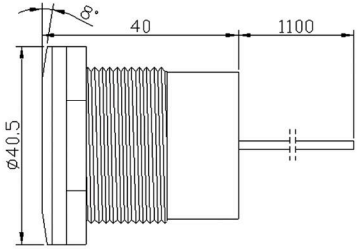

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL119T	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	D40X40	D33
GL119TD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	100LM	D40X40	D33

*IES Data support.



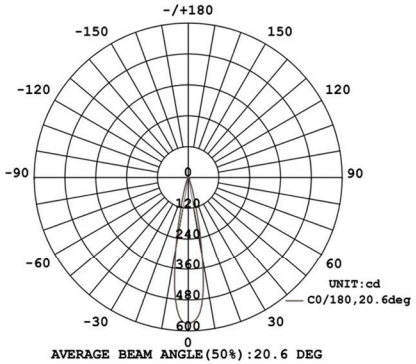

LED Colours

White 3000K White 4000K White 6000K



TS119
Optional accessories

GL119CT

Miniature Eye-Lid fixture complete with integral CREE LED package And 20/60 degree bean options.Tempered glass, marine grade 316 Stainless Steel option with construction rated to IP68 with Eye-Lid Design for asymmetric light emission.Product footprint of 41.5mm diameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

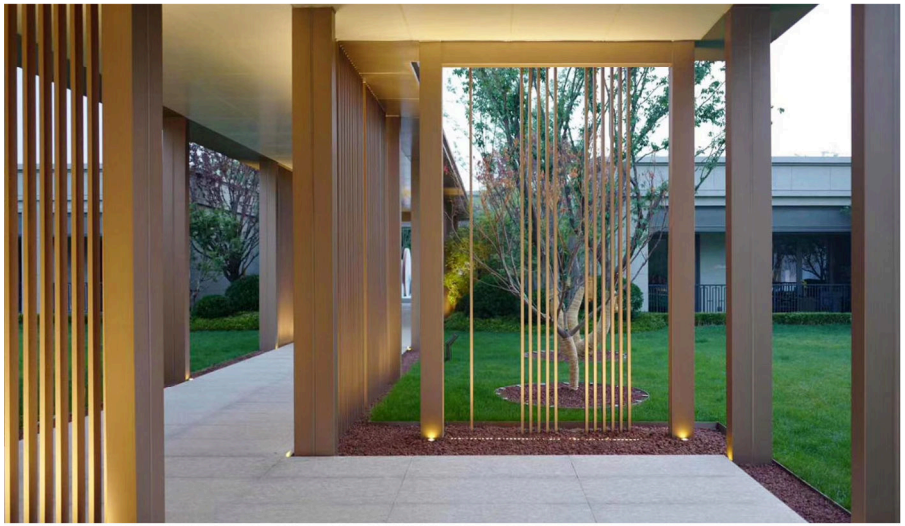

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	D41.5X48
Weight	140g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional).	Yes
Applications	Indoor/Outdoor/Landscape/Submersible





Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL119CT	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	D41.5X48	D33
GL119CTD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	100LM	D41.5X48	D33

*IES Data support.

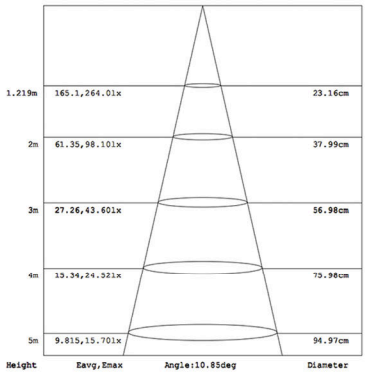

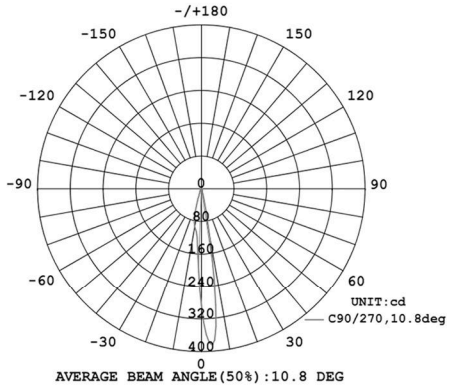

LED Colours

White 3000K White 4000K White 6000K







TS119
Optional accessories

GL119SQ

Square recessed fixture complete with integral CREE LED package and 20/60 degree bean options.Tempered glass, marine grade 316 Stainless Steel option with construction rated to IP68.Small product footprint ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

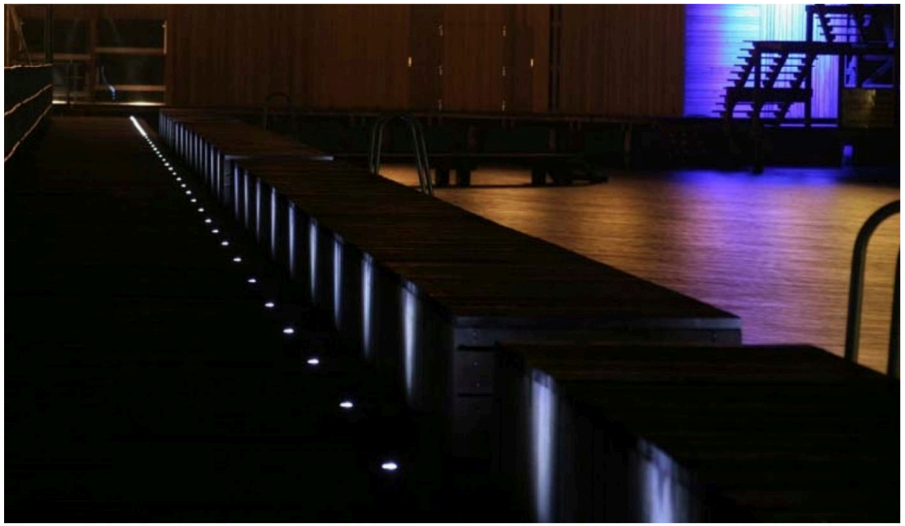

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	45X45X40
Weight	145g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

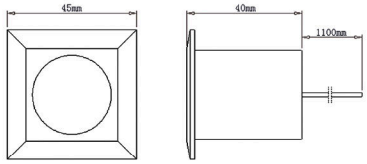

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous	Dimention	DrillSize
GL119SQ	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	45X45X40	D33
GL119SQD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	100LM	45X45X40	D33

*IES Data support.

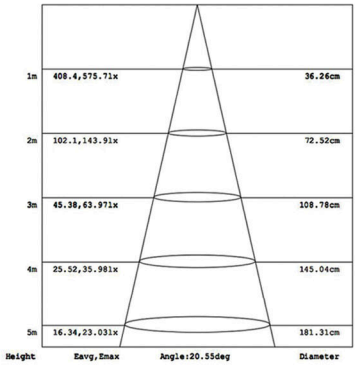

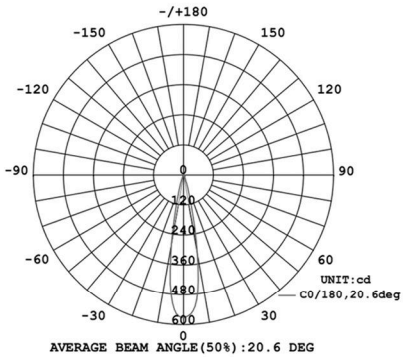

LED Colours

White 3000K White 4000K White 6000K

TS119
Optional accessories

GL129

Miniature recessed fixture complete with integral CREE LED package.Tempered glass,marine grade 316 Stainless Steel option with construction rated to IP68. Product footprint of 50mm diameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W
Power supply	N/A
Dimention	D50X42
Weight	155g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

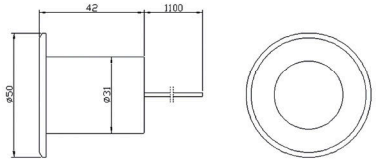

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL129	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	D50X42	D33
GL129D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	100LM	D50X42	D33

*IES Data support.

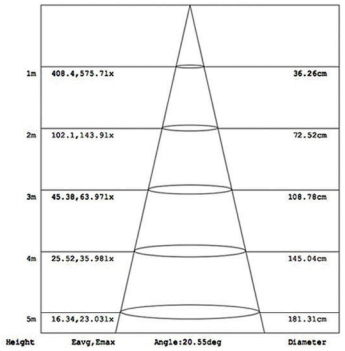

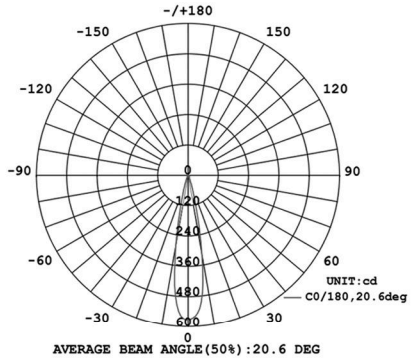

LED Colours

White 3000K White 4000K White 6000K

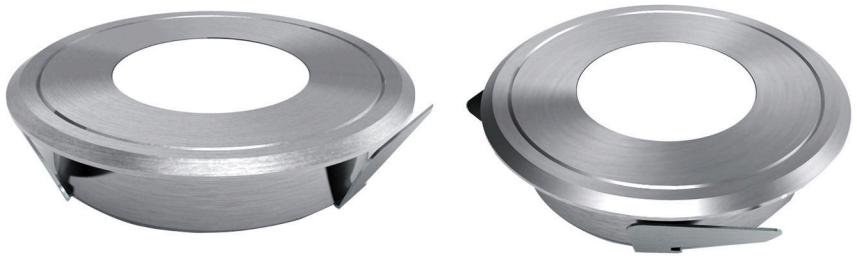

GL108

Marine Grade 316 Stainless Steel option with construction rated to IP68.Tempered glass with 120 degree beam option .It is designed to add style to floors ,bars ,walls and ceilings.The clever and stylish design of the light output means no glare even when looking directly at it ,making this product perfect for stair facings .Installation will be Quick and easy.

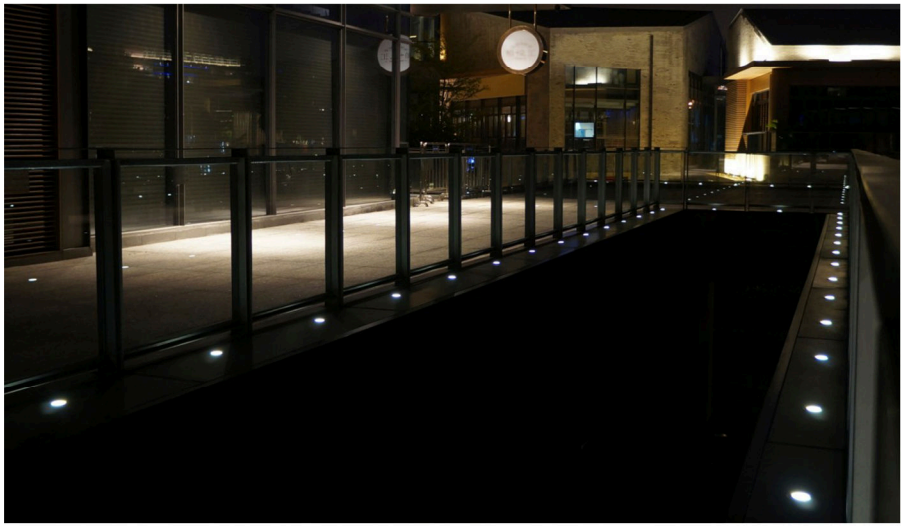

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	120°
Power	1W
Power supply	N/A
Dimention	D45X12
Weight	70g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

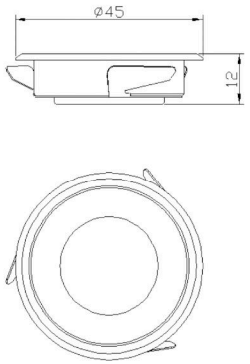

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL108	CREE	CW,WW, NW,Red Green,Blue,Amber	120	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	75LM	D45X12	D38

*IES Data support.

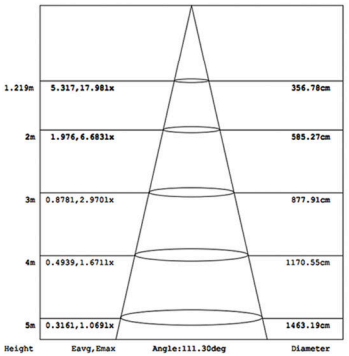

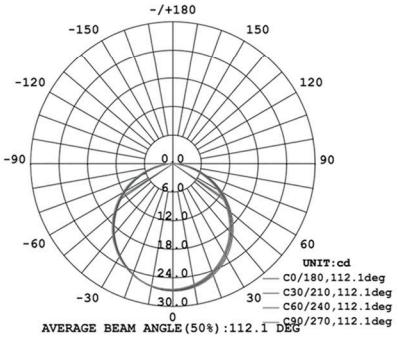

LED Colours

White 3000K White 4000K White 6000K

GL308

Marine Grade 316 Stainless Steel option with construction rated to IP68.Tempered glass with 120 degree beam option .It is designed to add style to floors,bars,walls and ceilings.The clever and stylish design of the light output means no glare even when looking directly at it,making this product perfect for stair facings.Installation will be quick and easy.

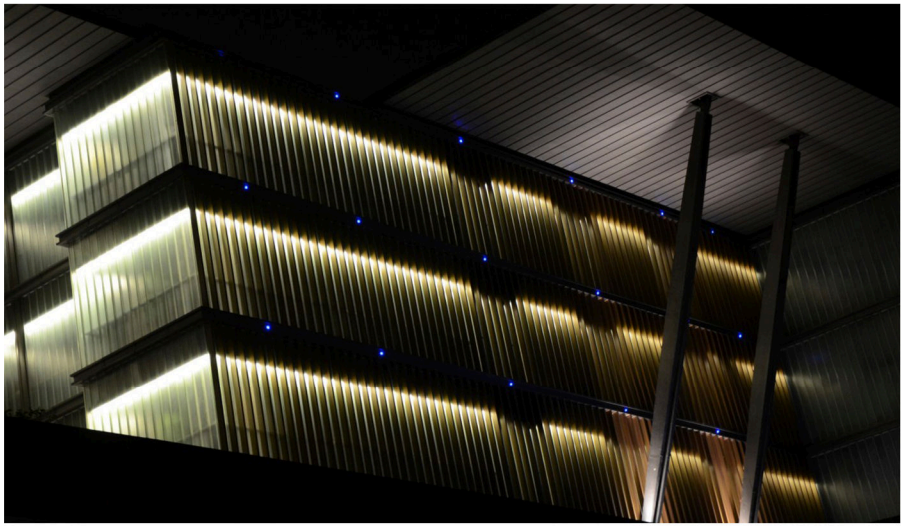

DESCRIPTION

LED Light source	LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	120°
Power	1W
Power supply	N/A
Dimention	D45X12
Weight	75g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible





Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL308	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	1.1M 2X0.4 Cable	1W	20LM	D45X12	D38
GL308RGB	EDISON	RGB	120	Constant voltage	24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D45X12	D38

*IES Data support.



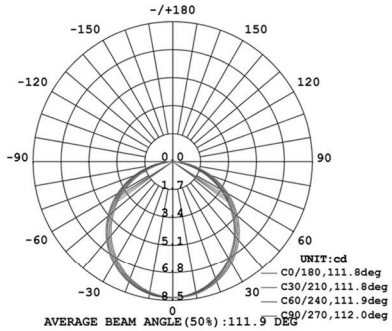

LED Colours



White 3000K White 4000K White 6000K RGB

GL117AL

GL117-1W

GL117

Tempered glass,marine grade 316 stainless steel bezel panel with aluminum lamp body.integral CREE LED package .Product Footprint of 60mm diameter ensures versatile application.10/45 degree beam as standard,product functions with 350 mA constant current driver.Inline driver options include switched 1-10Vand DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminlum(Lamp cup)
Optics	10° / S20° / 45° / F60°
Power	3W
Power supply	N/A
Dimention	D60X50
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

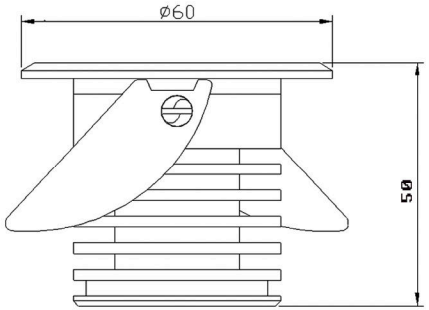

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL117	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/45/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	3W	220LM	D60X50	D50
GL117D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/45/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	3.5W	220LM	D60X50	D50
GL117DMX	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/45/F60	Constant voltage	DMX24VDC	Parallel	1.1M 5X0.5mm² Cable	3.5W	220LM	D60X50	D50

DMX decoder in built

*IES Data support.



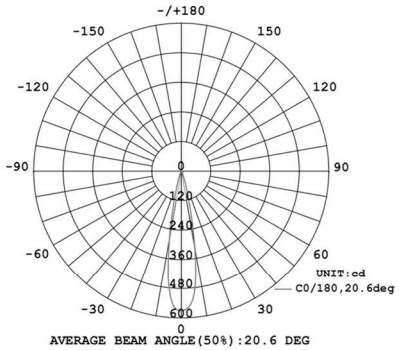

LED Colours

White 3000K White 4000K White 6000K

TS130
Optional accessories

GL130

Tempered glass,marine grade 316 stainless steel bezel panel with Aluminum lamp body.Hidden&embedded design installation .This fixture complete with integral CREE LED package.Fixture rated to IP67.

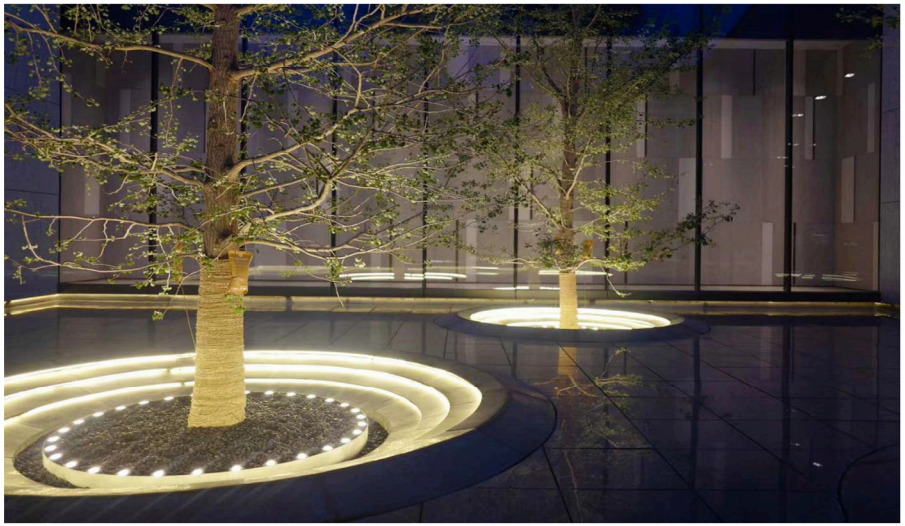

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber,RGB
Material	SUS316(Lamp cap)+Aluminlum(Lamp cup)
Optics	S20° / F60°
Power	3W
Power supply	N/A
Dimention	D98X160
Weight	930g
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape

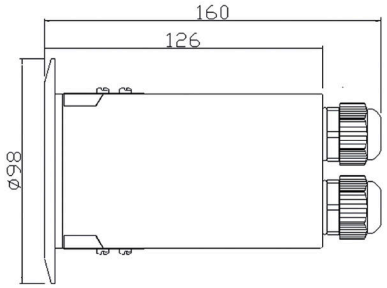

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL130	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	100-240VAC	Parallel	N/A	3W	250LM	D98X160	D74
GL130D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	N/A	3W	250LM	D98X160	D74
GL130RGB	CREE	RGB	45	Constant current	350mA	Series	N/A	3W	N/A	D98X160	D74

*IES Data support.



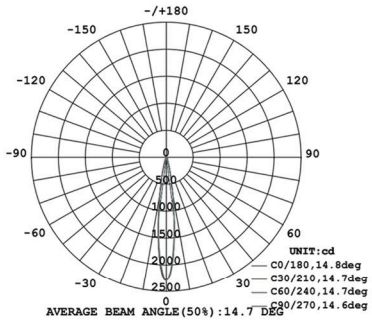

LED Colours



White 3000K White 4000K White 6000K RGB

TS140
Optional accessories

GL140

Miniature recessed fixture complete with integral CREE LED package and 10/20/30/45/60 degree bean options.Tempered glass, marine grade 316 Stainless Steel option with construction rated to IP68.Product footprint of 76mm diameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316 / Brass
Optics	10/S20/30/45/F60
Power	3W
Power supply	N/A
Weight	N/A
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL140	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/30 /45/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	D76X47	D65
GL140D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/30 /45/F60	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	D76X47	D65
GL140RGB	CREE	R+G+B	10/S20/30 /45/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	3W	N/A	D76X47	D65
GL140RGB-9W(IP67)	Edison	RGB	45	Constant current	350mA Controller	Series	2x3M 4X0.5mm² Cable	9W	N/A	D76X86	D65
GL140DMX-RGB	Edison	RGB(FullColor)	10/S20/30 /45/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	D76X47	D65
GL140DMX-RGBW	Edison	RGBW(FullColor)	10/S20/30 /45/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	D76X47	D65

DMX decoder in built

*IES Data support.



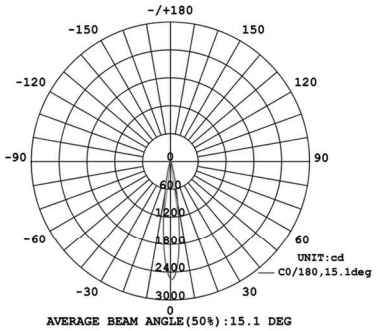

LED Colours



White 3000K White 4000K White 6000K RGB

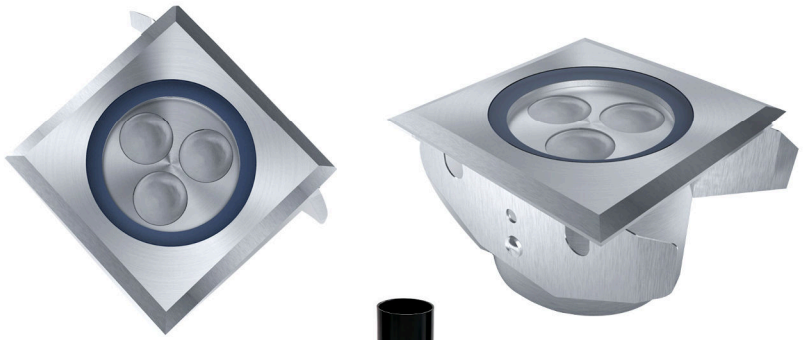

TS140
Optional accessories

GL140SQ

Square recessed fixture complete with integral CREE LED package and 20/60 degree bean options.Tempered glass, marine grade 316 Stainless Steel option with construction rated to IP68.Product footprint of 76mmdiameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

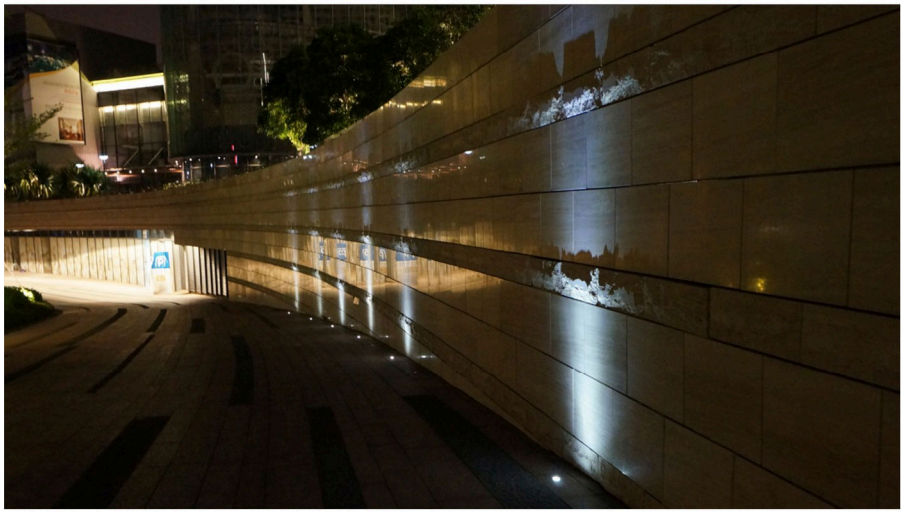

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	3W
Power supply	N/A
Dimention	76x76x47
Weight	N/A
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

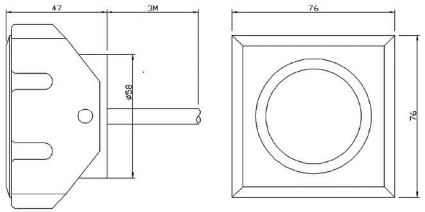

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL140SQ	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	76X76X47	D65
GL140SQD	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	76X76X47	D65
GL140SQRGB	CREE	R+G+B	S20/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	3W	N/A	76X76X47	D65
GL140SQ-DMX-RGB	Edison	RGB(FullColor)	S20/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	76X76X47	D65

DMX decoder in built

*IES Data support.



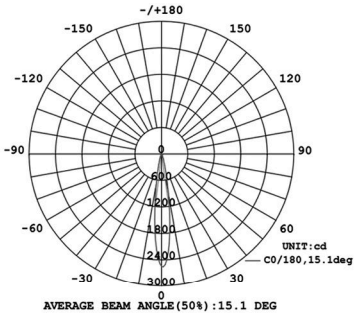

LED Colours



White 3000K White 4000K White 6000K RGB

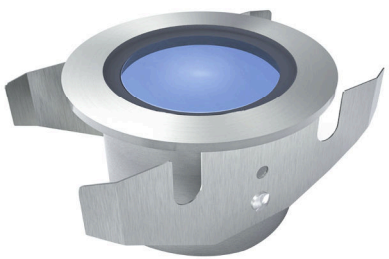

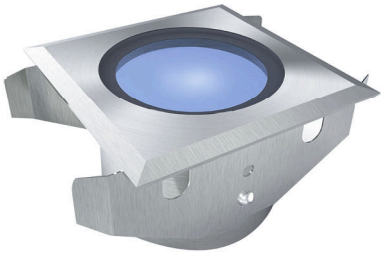

GL150SQ

TS140
Optional accessories

GL150

Miniature recessed fixture complete with integral CREE LED package and 120 degree bean option.Tempered glass, marine grade 316 Stainless Steel construction rated to IP68.Product footprint of 76mm diameter ensures versatile application.Inline driver options include switched,1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	120°
Power	3W
Power supply	N/A
Dimention	D76X47
Weight	635g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL150	CREE	CW,WW, NW,Red Green,Blue,Amber	120	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	D76X47	D65
GL150D	CREE	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	D76X47	D65
GL150SQ	CREE	CW,WW, NW,Red Green,Blue,Amber	120	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	76X76X47	D65
GL150RGB	EDISON	RGB	120	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	7W	N/A	D76X47	D65
GL150DMX-RGB	EDISON	RGB	120	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	D76X47	D65

DMX decoder in built

*IES Data support.



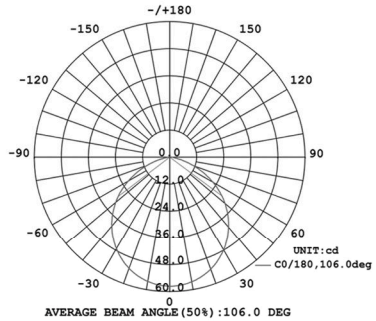

LED Colours

White 3000K

White 4000K

White 6000K

RGB

TS140
Optional accessories

GL550RGB

Miniature recessed fixture complete with integral Edison LED package and 120 degree beam option.Marine Grade 316 Stainless Steel construction rated to IP68.Tempered glass.Product footprint of 76mmt diameter ensures versatile application.

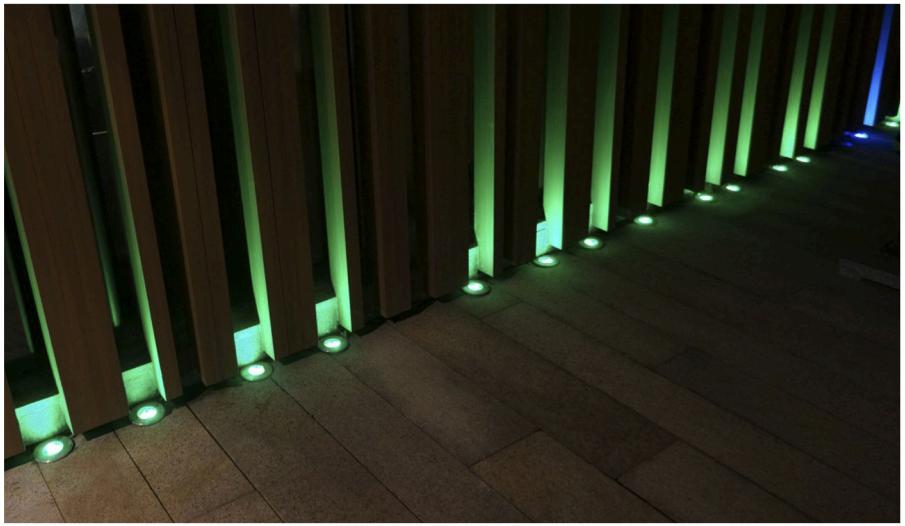

DESCRIPTION

LED Light source	LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	120°
Power	3W
Power supply	N/A
Dimention	D76X47
Weight	680g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL550RGB	EDISON	RGB	120	Constant voltage	24VDC	Parallel	3M 4X0.5mm² Cable	3W	N/A	D76X47	D65
GL550DMX-RGB	EDISON	RGB	120	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3W	N/A	D76X47	D65

DMX decoder in built

*IES Data support.

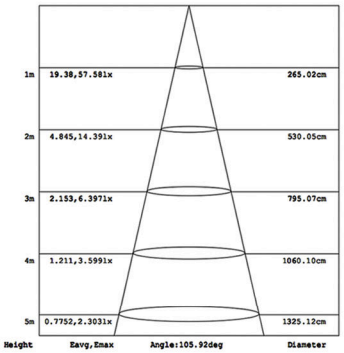

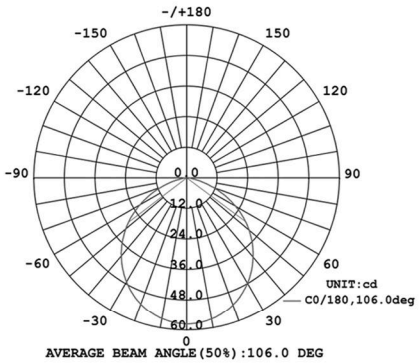

LED Colours

RGB

TS140
Optional accessories

GL151

Marine grade 316 stainless steel in-ground single marker light complete with integral CREE LED package.Tempered glass,fixture rated to IP68 with single aperture for asymmetric emission.Product functions with 350mA constant current driver,Inline driver options include switched,1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	N/A
Power	3W
Power supply	N/A
Dimention	D88x45
Weight	N/A
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

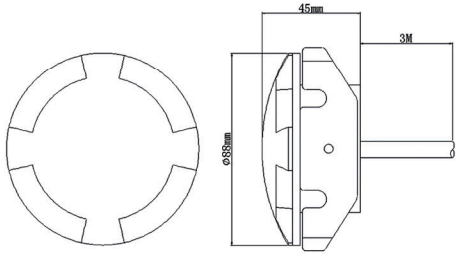

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL151	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	N/A	D88X45	D65
GL152	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	N/A	D88X45	D65
GL154	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	N/A	D88X45	D65
GL151D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	N/A	D88X45	D65
GL152D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	N/A	D88X45	D65
GL154D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	N/A	D88X45	D65

*IES Data support.







LED Colours

White 3000K White 4000K White 6000K

TS166
Optional accessories

GL166

Midsize surface fixture complete with integral CREE XED(6pcsLED) package and 10/40 degree bean options .Tempered glass, marine Grade 316 Stainless Steel construction rated toIP68.Hidden & embedded design installation .No mechanical joints to light source ensures robust protection against water ingress .Product runs cool meeting all touch temperature requirements. Inline 350mA driver options include switched, mains, 1-10V and DALI dimmable solutions

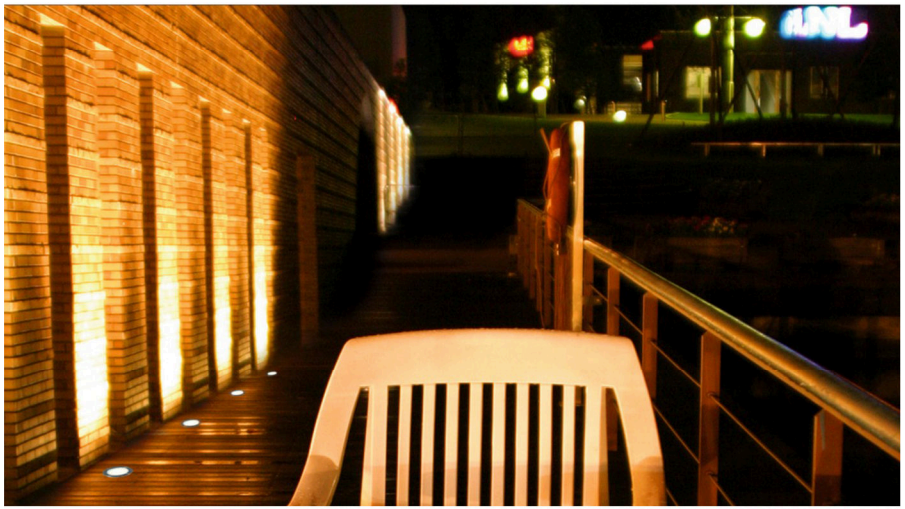

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S10° / F40°
Power	6W
Power supply	N/A
Dimention	D96X47
Weight	940g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL166	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	6W	600LM	D96X47	D85
GL166D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6.5W	600LM	D96X47	D85
GL166RGB	CREE	2R+2G+2B	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	6W	N/A	D96X47	D85
GL166DMX-RGB	CREE	2R+2G+2B	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	D96X47	D85
GL166DMX-RGB	Edison	RGB(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	D96X47	D85
GL166DMX-RGBW	Edison	RGBW(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	D96X47	D85

DMX decoder in built

*IES Data support.





LED Colours



White 3000K White 4000K White 6000K RGB

TS166
Optional accessories

GL168

Midsize surface fixture complete with integral CREE XPE LED(8pcsLED) package and 10/40 degree beam options. Tempered glass,marine grade 316 Stainless Steel construction rated to IP68. Hidden&embedded design installation. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Inline 350mA driver options include switched, mains, 1-10V and DALI dimmable solutions.

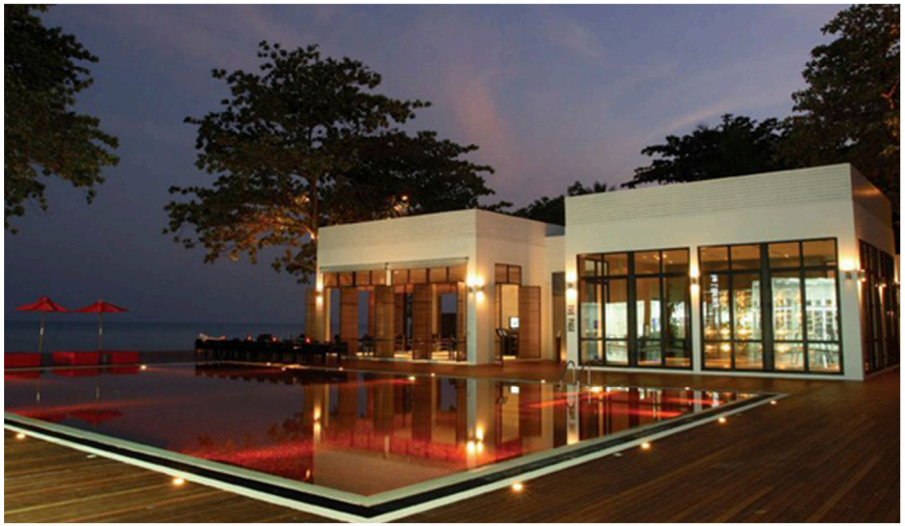

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S10° / F40°
Power	8W
Power supply	N/A
Dimention	D96X47
Weight	940g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible

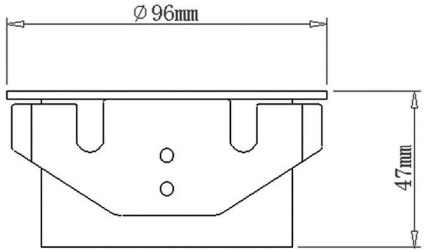

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL168	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	8W	800LM	D96X47	D85
GL168D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	9W	800LM	D96X47	D85
GL168RGB	CREE	3R+3G+2B	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	8W	N/A	D96X47	D85
GL168DMX-RGB	CREE	3R+3G+2B	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	9W	N/A	D96X47	D85

DMX decoder in built

*IES Data support.

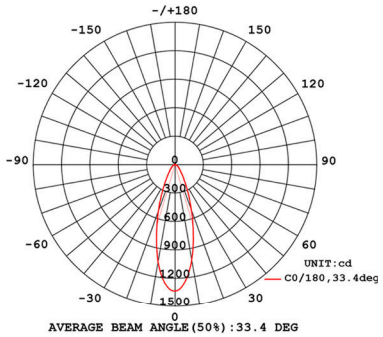



LED Colours



White 3000K White 4000K White 6000K RGB

TS119

Optional accessories

GL191

Marine grade 316 stainless steel in-ground light complete with integral CREE LED package. Tempered glass, fixture rated to IP68 allowing submersion in water thus negating common issues arising from lack of soil drainage. Product functions with 350mA constant current driver. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all “touch temperature"requirements.

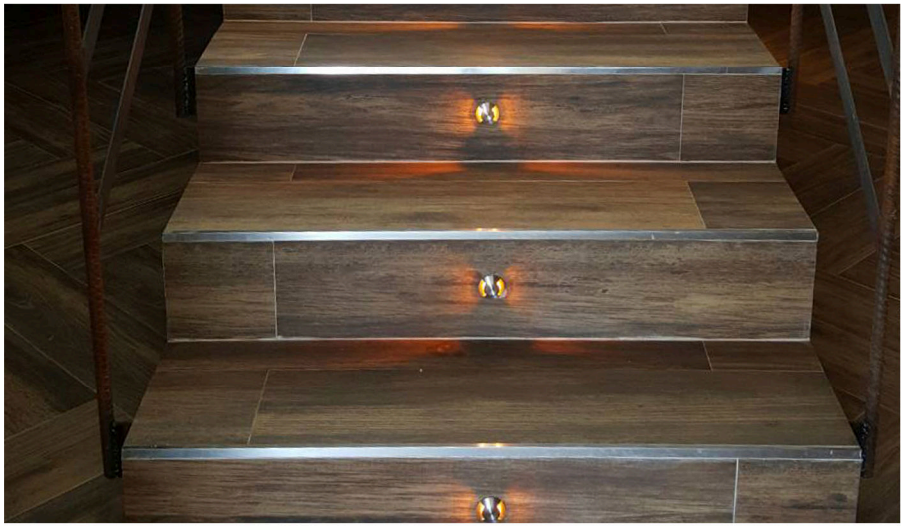

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	N/A
Power	1W
Power supply	N/A
Weight	140g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape/Submersible





Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL191	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	N/A	D44X43	D32
GL192	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	N/A	D44X43	D32
GL193	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	N/A	D44X43	D32
GL191D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	N/A	D44X43	D32
GL192D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	N/A	D44X43	D32
GL193D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	N/A	D44X43	D32

*IES Data support.

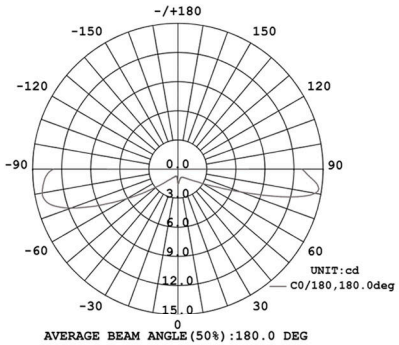

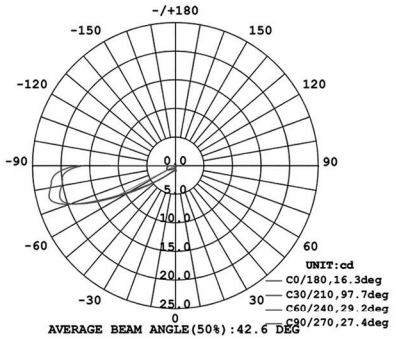

LED Colours

White 3000K White 4000K White 6000K

GL266

Midsize surface fixture complete with integral CREE XPE LED (6pcs LED) package and 10/40 degree beam options. Tempered glass, marine grade 316 Stainless Steel construction rated to IP68. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Inline 350mA driver options include switched, mains, 1-10V and DALI dimmable solutions.

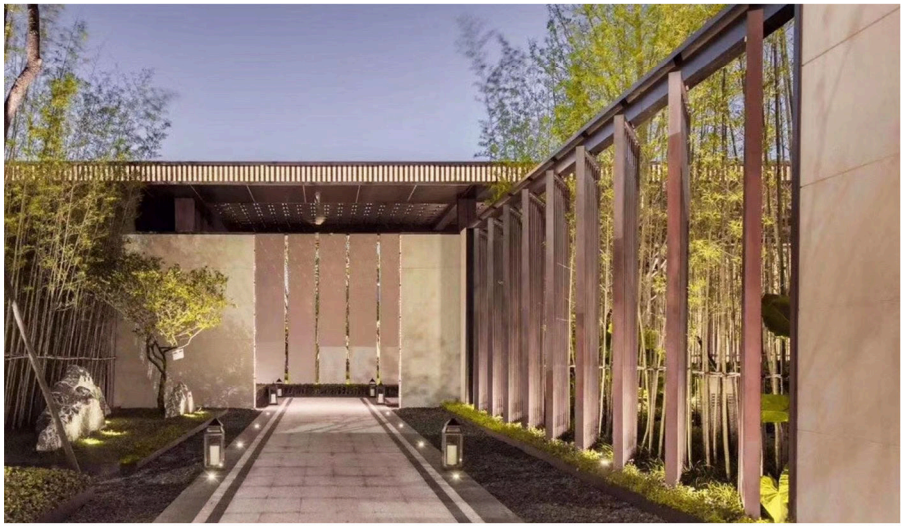

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+Aluminlum(Lamp cup)
Optics	10/40
Power	12W
Power supply	350mA or 24VDC
Weight	N/A
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

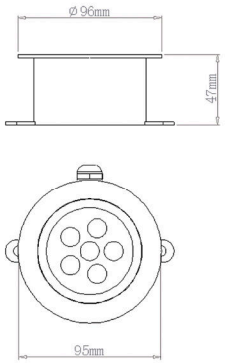

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL266	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	6W	600LM	D96X47	N/A
GL266D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6.5W	600LM	D96X47	N/A
GL266RGB	CREE	RGB(2R+2G+2B)	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	6W	N/A	D96X47	N/A

*IES Data support.



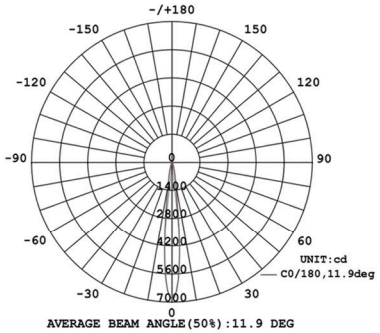

LED Colours



White 3000K White 4000K White 6000K RGB

GL268

Midsize surface fixture complete with integral CREE XPE LED(8pcsLED) package and 10/40 degree beam options. Tempered glass marine grade 316 Stainless Steel construction rated to IP68. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Inline 350mA driver options include switched, mains 1-10V and DALI dimmable solutions.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S10° / F40°
Power	8W
Power supply	N/A
Dimention	D96X47
Weight	940g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

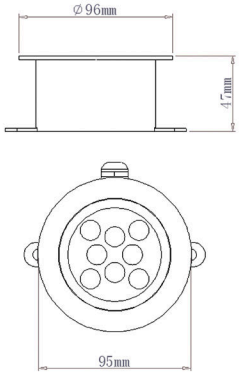

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL268	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	8W	800LM	D96X47	N/A
GL268D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	9W	800LM	D96X47	N/A
GL268RGB	CREE	RGB(3R+3G+2B)	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	8W	N/A	D96X47	N/A

*IES Data support.

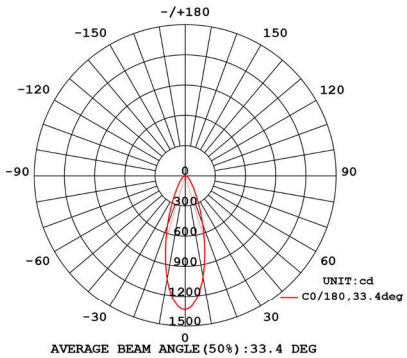



LED Colours

White 3000K

White 4000K

White 6000K

RGB

EURBORN®

FOUNTAIN LIGHT

SPECIALIZED MANUFACTURER LED LIGHTING PRODUCTS

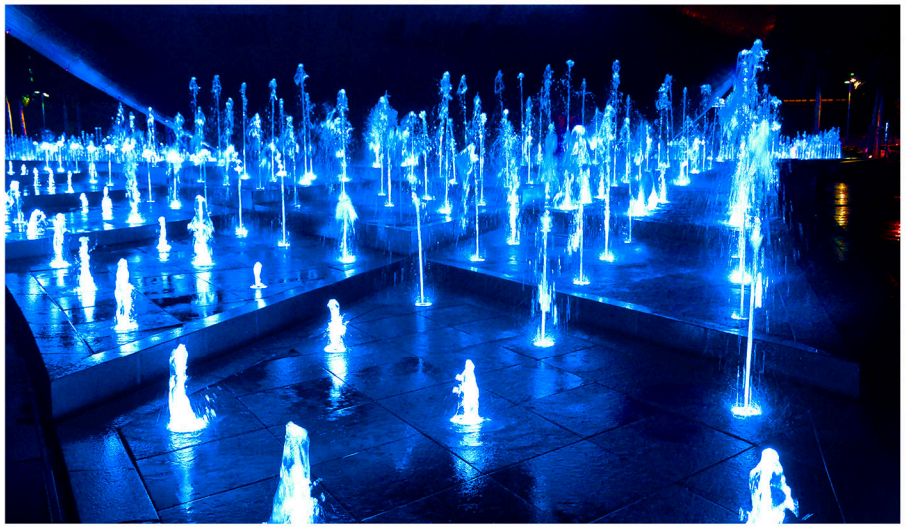

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316 + 6mm Toughened glass
Optics	15° / S20° / 30° / 45° / F60°
Power	9W / 9*2W / 9*3W
Power supply	12VDC or 24VDC
Dimention	D173XH41
Weight	1420g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Constant voltage DMX Controller
Applications	surface mounted; Fountains, artificial lakes, natural lakes, swimming halls, aquariums and other underwater lighting or decoration may apply

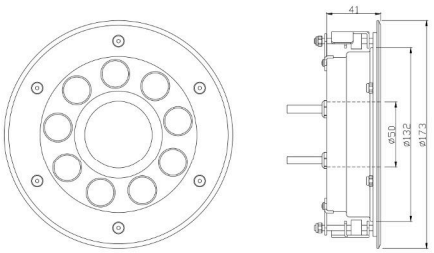

Assembling instruction
Nozzle dimension D50mm MAX.



Model No.	LED Brand	Color	Beam	Input	Wiring	Cable	Power	Luminous Flux	Dimention	Aperture	DrillSize
FL410D	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	12VDC or 24VDC	Parallel	3M 2X0.75mm² Cable or 1.1M Plug	9W	800LM	D173XH41	D50	D160
FL410DMX	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	800LM	D173XH41	D50	D160
FL410DMX-RGB	CREE	3R+3G+3B	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	N/A	D173XH41	D50	D160
FL410DMX-RGB	Edison	RGB(Fullcolor)	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	N/A	D173XH41	D50	D160
FL410DMX-RGBW	Edison	RGBW(Fullcolor)	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	12W	N/A	D173XH41	D50	D160

DMX decoder in built

*IES Data support.
*Power could be customized



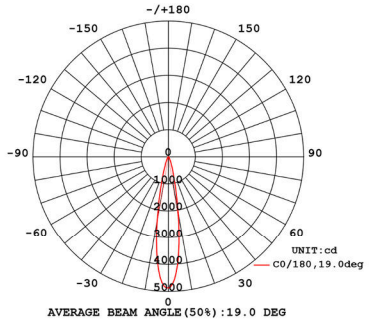

LED Colours



White 3000K White 4000K White 6000K RGB

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	15° / S20° / 30° / 45° / F60°
Power	9W / 9+2W / 9+3W
Power supply	12VDC or 24VDC
Dimention	D155XH55
Weight	1460g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Constant voltage DMX Controller
Applications	Fountains, artificial lakes, natural lakes, swimming halls, aquariums and other underwater lighting or decoration may apply

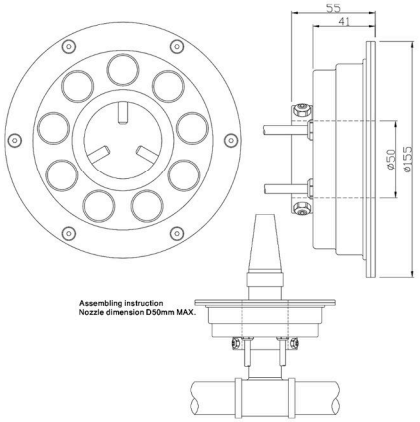

Model No.LED	Brand	Color	Beam	Input	Wiring	Cable	Power	Luminous Flux	Dimention	Aperture	DrillSize
FL411D	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	12VDC or 24VDC	Parallel	3M 2X0.75mm² Cable or 1.1M Plug	9W	800LM	D155XH55	D50	N/A
FL411DMX	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	800LM	D155XH55	D50	N/A
FL411DMX-RGB	CREE	3R+3G+3B	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	N/A	D155XH55	D50	N/A
FL411DMX-RGB	Edison	RGB(Fullcolor)	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	10W	N/A	D155XH55	D50	N/A
FL411DMX-RGBW	Edison	RGBW(Fullcolor)	15/S20/30/45/F60	12VDC or 24VDC DMX Controller	Parallel	2x1.1M 5X0.5mm² Cable or 1.1M Plug	12W	N/A	D155XH55	D50	N/A

DMX decoder in built

*IES Data support.
*Power could be customized

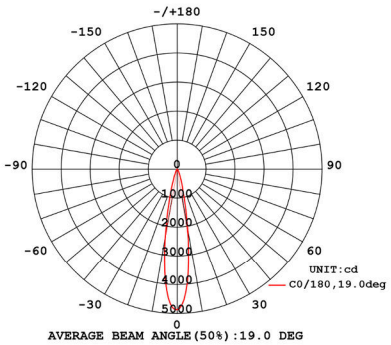



LED Colours



EURBORN®

SPOT LIGHT

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

EU3036

In a typical spotlight design. Finished to a high standard using anodized aluminum makes it suitable for both indoor and outdoor applications, construction rated to IP65 and configured to 12/45 degree beam options. Using an adjustable head and cowl design for low glare, means directing the light could not be easier. Maximum visual comfort for superior standards

DESCRIPTION

LED Light source	Hight Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	12° / 45°
Power	1W
Power supply	N/A
Dimentvion	N/A
Weight	N/A
IP Rating	IP65
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	YES
Applications	Indoor/Outdoor/Landscape
Optional brand	CREE

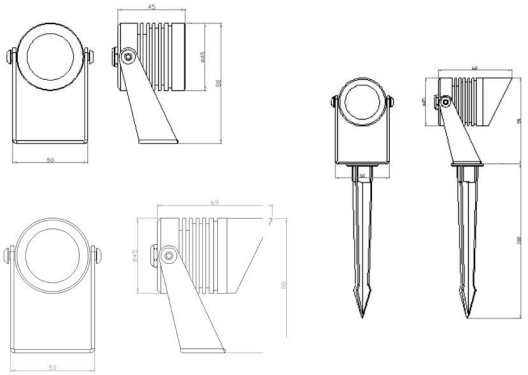

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU3036	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	90LM	L45XW50XH80	
EU3036D	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	90LM	L45XW50XH80	
EU3036DMX	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	1.3W	90LM	L45XW50XH80	
EU3036X	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	90LM	L69XW50XH80	
EU3036XD	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	90LM	L69XW50XH80	
EU3036X-DMX	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	1.3W	90LM	L69XW50XH80	
EU3036X-SP	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	90LM	L69XW50XH230	
EU3036X-SPD	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	90LM	L69XW50XH230	
EU3036X-SPDMX	CREE	CW,WW,NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	1.3W	90LM	L69XW50XH230	

DMX decoder in built

*IES Data support.





LED Colours

White 3000K White 4000K White 6000K

IP65 F

EU3040

Finished to a high standard using anodized aluminum makes it suitable for both indoor and outdoor applications, construction rated to IP67 and configured to 3 degree beam angle. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements

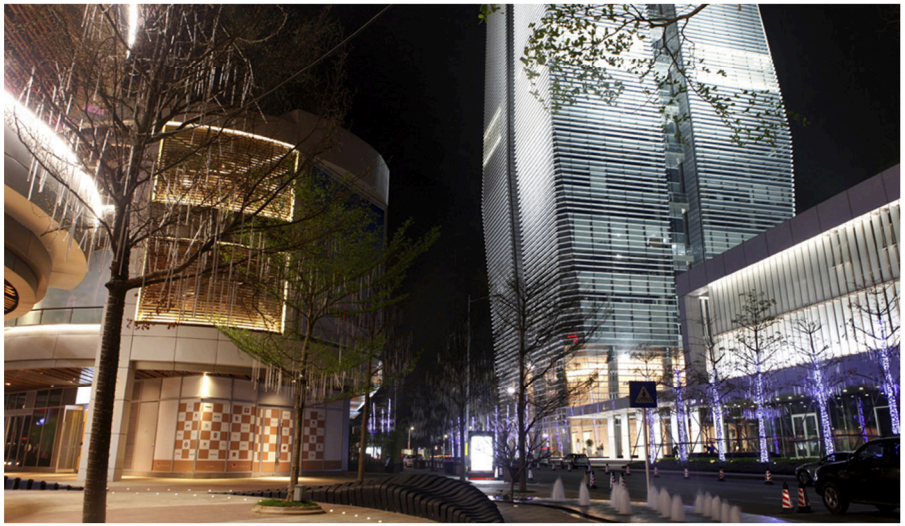

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW
Material	Aluminium
Optics	3°
Power	7W
Power supply	N/A
Dimention	D62XH93XT82
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape
Optional brand	CREE

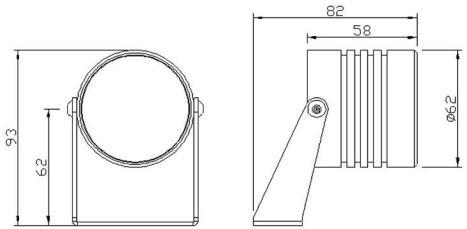

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention
EU3040	CREE	CW,WW,NW	3°	Constant current	600mA@11.3VDC	Series	3M 2X0.75mm² Cable	7W	600LM	D62XH93XT82
EU3040D	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	7.5W	600LM	D62XH93XT82
EU3040DMX	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	3M 4X0.5mm² Cable	7.5W	600LM	D62XH93XT82

*IES Data support.

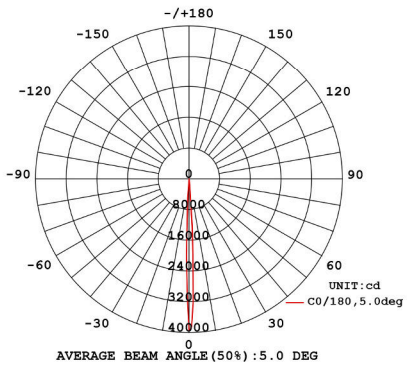

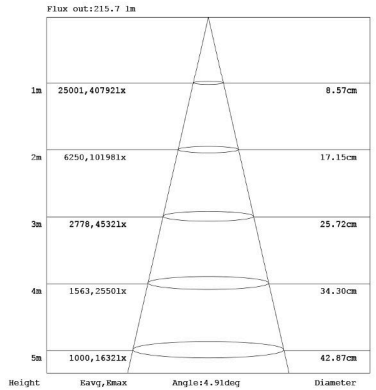

LED Colours

White 3000K White 4000K White 6000K

IP67 F

EU3042

Bar stock stainless steel surface mounted projector complete with integral CREE LED package. Fixture rated to IP68. No mechanical joints to light source ensures robust protection against water ingress. Suitable for the illumination of small/medium trees, building exteriors, columns if the voltage less than 18W. Above 18W, the luminaires may only be operated under water, recessed luminaires for private and public swimming pools. Underwater luminaires in various sizes and light outputs for installation in concrete, foil, metal or synthetic pools. To avoid harmful deposits and dirt on the luminaires, the water must have a neutral pH value and must be free of components that attack metal.

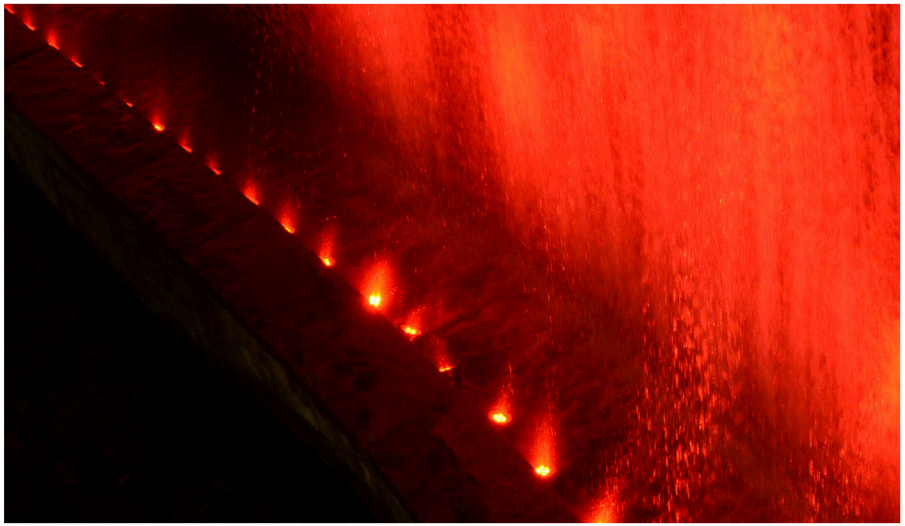

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316(Lamp cap)+SUS316(Lamp cup)
Optics	20° / 60° (10° / 30° / 45°)
Power	12W
Power supply	N/A
Dimention	D153XH173XT48(T55)
Weight	1kg
IP Rating	IP68
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible
Optional brand	CREE

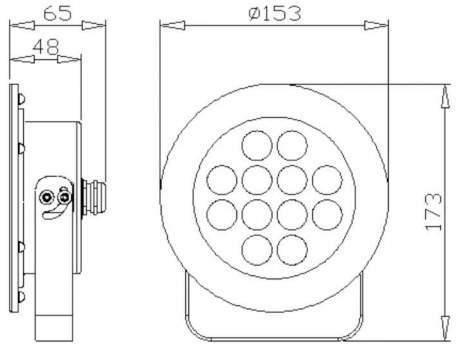

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention
EU3042	CREE	CW,WW,NW Red Green,Blue,Amber	S20/F60 (10/30/45)	Constant current	350mA	Series	3M 2X0.75mm² Cable	12W	1000LM	D153XH173XT48
EU3042D	CREE	CW,WW,NW Red Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	13W	1000LM	D153XH173XT48
EU3042DM	OSRAM	CW,WW,NW Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	13W	500LM	D153XH173XT48
EU3042DMX	CREE	CW,WW,NW Red Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	13W	1000LM	D153XH173XT48
* EU3042D-24W	CREE	CW,WW,NW Red Green,Blue,Amber	S20/F60 (10/30/45)	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	24W	2000LM	D153XH173XT48
* EU3042D-36W	CREE	CW,WW,NW	S20/F60 (10/30/45)	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	36W	2800LM	D153XH173XT48
EU3042DMX-RGB	Edison	RGB,RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	13W	N/A	D153XH173XT48
* EU3042DMX-24W-RGB	Edison	RGB,RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	24W	N/A	D153XH173XT48
* EU3042DMX-36W-RGBW	Edison	RGBW	S20/F60 (10/30/45)	Constant voltage	24VDC DMX Controller	Parallel	3M 4X0.5mm² Cable	36W	N/A	D153XH173XT48

*Underwater use only

*IES Data support.

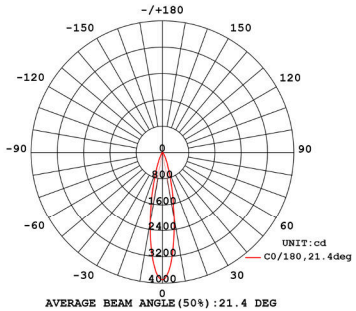



LED Colours



White 3000K White 4000K White 6000K RGB

IP68 F

PL608

Bar stock aluminum surface mounted projector complete with Integral CREE LED(6pcs)package.Tempered glass,fixture rated to IP67 and configured to 10/40 degree beam options.NO mechanical joints to light source ensures robust protection against water ingress.Product runs cool meeting all touch temperature requirements.suitable for the illumination of small/medium trees,building exteriors,columns.

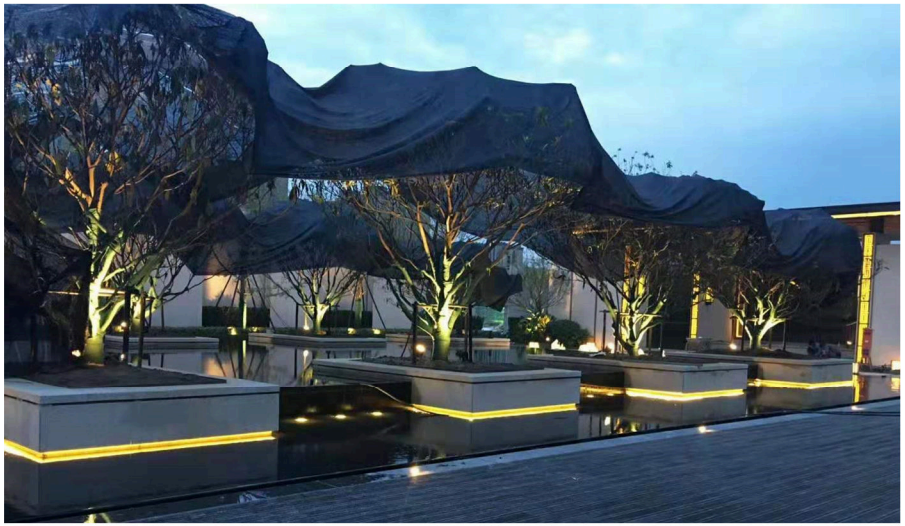

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	S10° / F40°
Power	6x1W (3x1W)
Power supply	N/A
Dimention	93X70X112
Weight	300g
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

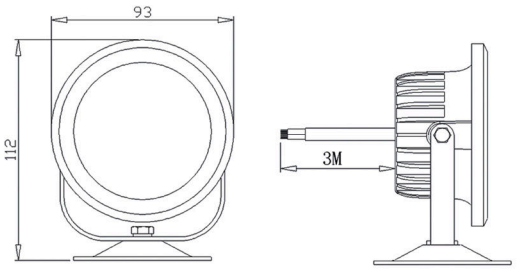

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL608	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	6W	500LM	93X70X112	N/A
PL608D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6.5W	500LM	93X70X112	N/A
PL608RGB	CREE	2R+2G+2B	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	6W	N/A	93X70X112	N/A
PL608DMX-RGB	CREE	2R+2G+2B	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	93X70X112	N/A
PL608DMX-RGB	Edison	RGB(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	93X70X112	N/A
PL608DMX-RGBW	Edison	RGBW(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	93X70X112	N/A

DMX decoder in built

*IES Data support.

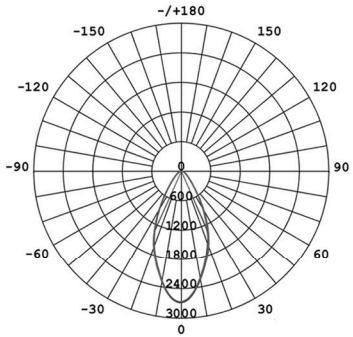



LED Colours



White 3000K White 4000K White 6000K RGB

PL612

Bar stock aluminum surface mounted projector complete with Integral CREE LED(12pcs)package.Tempered glass,fixture rated to IP67 and configured to 10/20/40/60 degree beam options.NO mechanical joints to light source ensures robust protection against water ingress.Product runs cool meeting all touch temperature requirements.suitable for the illumination of small/medium trees,building exteriors,columns.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum+SUS316(Bracket)
Optics	10° / S20° / 40° / F60°
Power	12x1W
Power supply	N/A
Dimention	148XH170XT45
Weight	1.1KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

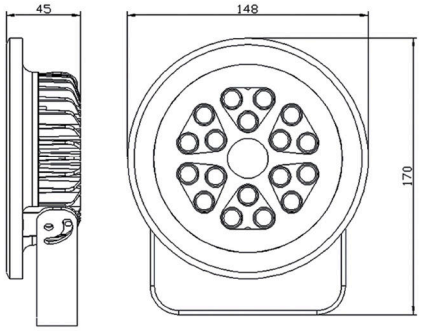

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL612	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	12W	1300LM	148XH170XT45	N/A
PL612D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	13W	1300LM	148XH170XT45	N/A
PL612RGB	CREE	4R+4G+4B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	12W	N/A	148XH170XT45	N/A
PL612DMX-RGB	CREE	4R+4G+4B	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	148XH170XT45	N/A
PL612DMX-RGB	Edison	RGB(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	148XH170XT45	N/A
PL612DMX-RGBW	Edison	RGBW(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	13W	N/A	148XH170XT45	N/A

DMX decoder in built

*IES Data support.



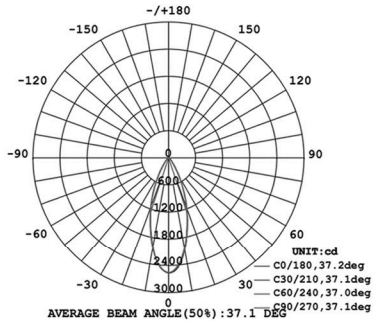

LED Colours



White 3000K White 4000K White 6000K RGB

PL618

Bar stock aluminum surface mounted projector complete with Integral CREE LED(18pcs)package.Tempered glass ,fixture rated to IP67 and configured to 10/20/40/60 degree beam options.NO mechanical joints to light source ensures robust protection against water ingress.Product runs cool meeting all touch temperature requirements.suitable for the illumination of small/medium trees,building exteriors ,columns.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum+SUS316(Bracket)
Optics	10° / S20° / 40° / F60°
Power	18x1W
Power supply	N/A
Dimention	148XH170XT45
Weight	1.1KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

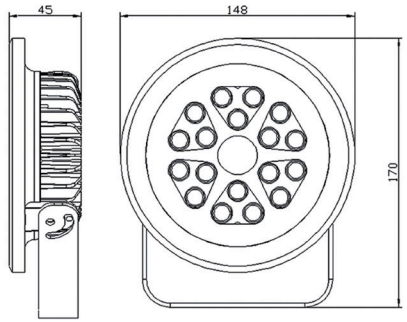

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL618	CREE	CW,WW, NW,Red, Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	18W	1700LM	148XH170XT45	N/A
PL618D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	20W	1700LM	148XH170XT45	N/A
PL618RGB	CREE	6R+6G+6B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	18W	N/A	148XH170XT45	N/A
PL618DMX-RGB	CREE	6R+6G+6B	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	148XH170XT45	N/A
PL618DMX-RGB	Edison	RGB(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	148XH170XT45	N/A
PL618DMX-RGBW	Edison	RGBW(Fullcolor)	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	20W	N/A	148XH170XT45	N/A

DMX decoder in built

*IES Data support.

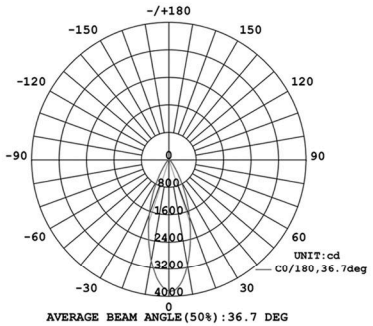



LED Colours



White 3000K White 4000K White 6000K RGB

PL624

Bar stock aluminum surface mounted projector complete with integral CREE LED(24pcs) package.Tempered glass, fixture rated to IP67 and configured to 10/20/40/60 degree beam options. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Suitable for the illumination of small/medium trees, building exteriors, columns.

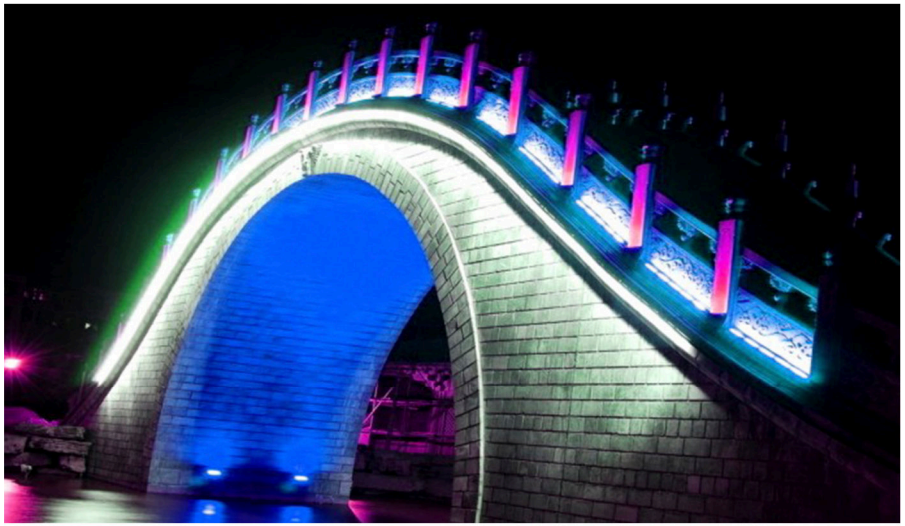

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum+SUS316(Bracket)
Optics	10° / S20° / 40° / F60°
Power	24x1W
Power supply	N/A
Dimention	214XH236XT50
Weight	1.7KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

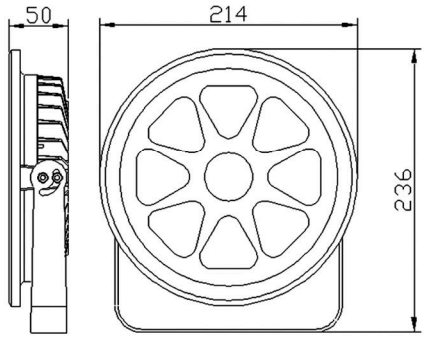

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL624	CREE	CW,WW, NW,Red, Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	24W	2200LM	214XH236XT50	N/A
PL624D	CREE	CW,WW, NW,Red, Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	26W	2200LM	214XH236XT50	N/A
PL624RGB	CREE	8R+8G+8B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	24W	N/A	214XH236XT50	N/A
PL624DMX-RGB	CREE	8R+8G+8B	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	26W	N/A	214XH236XT50	N/A

DMX decoder in built

*IES Data support.

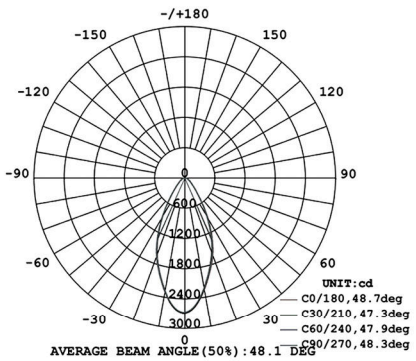



LED Colours



PL824

Bar stock aluminum surface mounted projector complete with Integral CREE LED(24pcs)package.Tempered glass,fixture rated to IP67 and configured to 10/20/40/60 degree beam options. NO mechanical joints to light source ensures robust protection against water ingress.Product runs cool meeting all touch temperature requirements.suitable for the illumination of small/medium trees,building exteriors,columns.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium+SUS316(Bracket)
Optics	10° / S20° / 40° / F60°
Power	24x1W
Power supply	N/A
Dimention	220XH243XT55
Weight	2.8KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

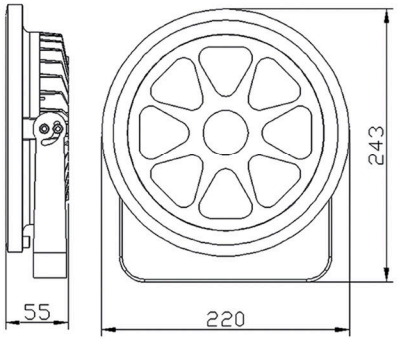

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL824	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	24W	2200LM	220 X H243X T55	N/A
PL824D	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	26W	2200LM	220 X H243 X T55	N/A
PL824RGB	CREE	8R+8G+8B	10/S20/40/F60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	24W	N/A	220 X H243 X T50	N/A

*IES Data support.

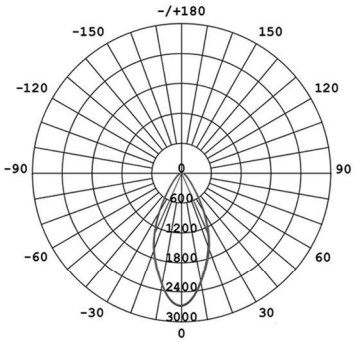



LED Colours



PL021

Marine grade 316 stainless steel miniature surface mounted fixture complete with integral CREE LED package.Tempered glass,fixture Rated to IP68 allowing submersion in water thus negating common Issues arising from lack of soil drainage.12/45 degree beam Options.NO mechanical joints to light source ensures robust Protection against water ingress .product runs cool meeting all Touch temperature requirements.Ideal as a surface mounted miniature marker light.

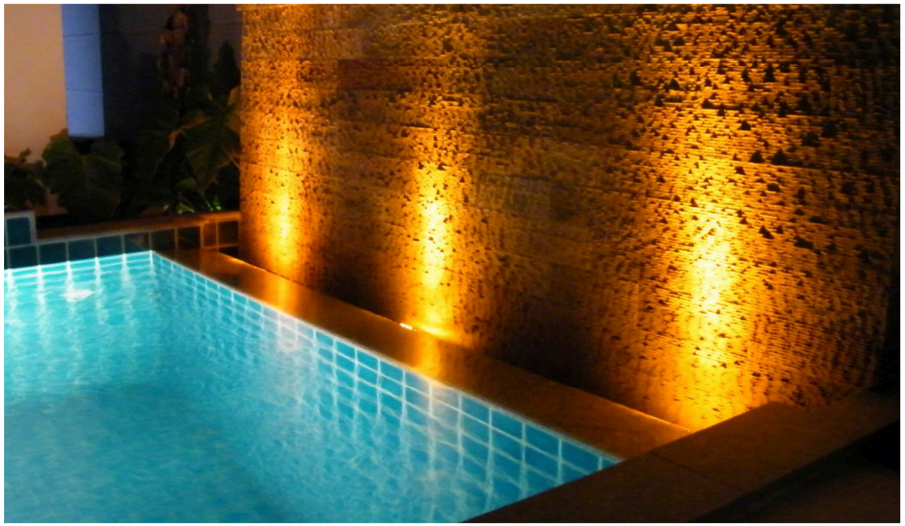

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S12° / F45°
Power	1W
Power supply	N/A
Dimention	60X60X78
Weight	500g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

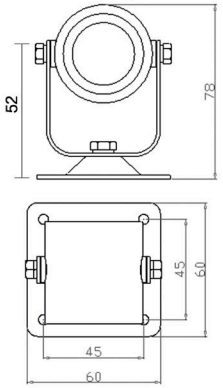

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL021	CREE	CW,WW, NW,Red, Green,Blue,Amber	12/45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	60X60X78	N/A
PL021D	CREE	CW,WW, NW,Red Green,Blue,Amber	12/45	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	1.3W	100LM	60X60X78	N/A
PL021RGB	Edison	RGB	45	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	3W	N/A	60X60X78	N/A
PL021DMX-RGB	Edison	RGB	45	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	60X60X78	N/A

DMX decoder in built

*IES Data support.

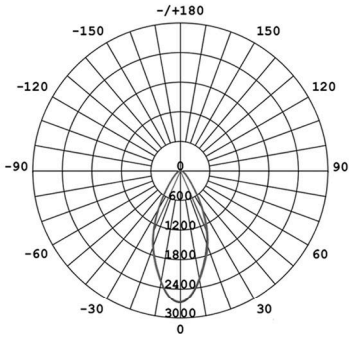



LED Colours



White 3000K White 4000K White 6000K RGB

PL023RGB

PL023

Marine Grade 316 stainless steel miniature surface mounted fixture Complete with integral CREE LED package glass , fixture Rated to IP68 allowing submersion in water thus negating common Issues arising from lack of soil drainage.20/45/60 degree beam Options.NO mechanical joints to light source ensures robust Protection against water ingress.product runs cool meeting all touch Temperature requirements.Ideal as a surface mounted miniature Marker light.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	3x1W
Power supply	N/A
Dimention	70x70x89
Weight	750g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

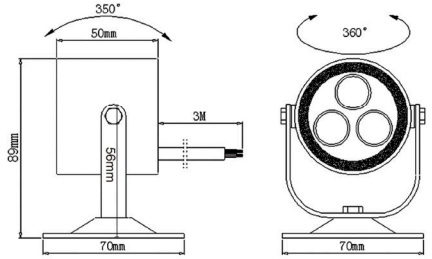

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL023	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	70x70x89	N/A
PL023D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	70x70x89	N/A
PL023RGB	Edison	RGB	10/20/45/60	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	9W	N/A	70x70x89	N/A
PL023DMX-RGB	Edison	RGB	45	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	3.5W	N/A	70x70x89	N/A

DMX decoder in built

*IES Data support.

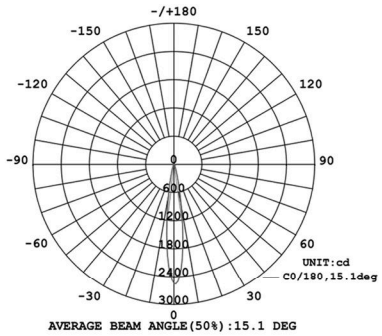



LED Colours



PL023-2L

PL023-5L

PL023-2L

Marine grade 316 stainless surface mounted fixture complete With integral CREE LED package.Tempered glass,fixture rated to IP68 allowing submersion.20/60 degree beam options,product Functions with 350 mA constant current driver.NO mechanical joints to light source ensures robust protection against water ingress.Product runs cool meeting all touch temperature requirements.Elevated light source(500mm)allows for a down light effect to be Created to paths and boundaries.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	3W
Power supply	N/A
Dimention	N/A
Weight	N/A
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

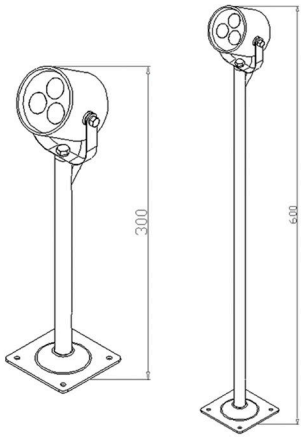

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL023-2L	CCREE	RGB,CW,WW, NW Red,Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	70x70x300	N/A
PL023D-2L	CREE	CW,WW, NW Red,Green,Blue,Amber	S20/F60	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	70x70x300	N/A
PL023-5L	CREE	RGB,CW,WW, NW Red,Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	70x70x600	N/A
PL023D-5L	CREE	CW,WW, NW Red,Green,Blue,Amber	S20/F60	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	70x70x600	N/A

*IES Data support.

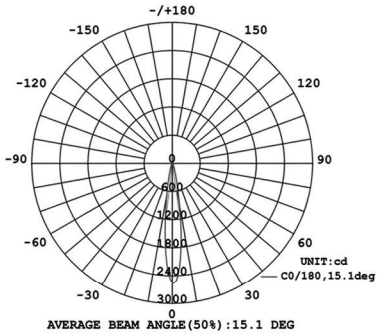



LED Colours



White 3000K White 4000K White 6000K RGB

PL026

Marine Grade 316 stainless steel miniature surface mounted fixture complete with integral CREE LED package. Tempered glass,fixture Rated to IP 68 allowing submersion in water thus negating commonIssues arising from lack of soil drainage.10/40 degree beam Options .NO mechanical joints to light source ensures robust Protection against water ingress .product runs cool meeting all Touch temperature requirements. Ideal as a surface mounted miniature marker light.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S10° / F40°
Power	6W
Power supply	N/A
Dimention	85X85X104
Weight	1.05kg
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

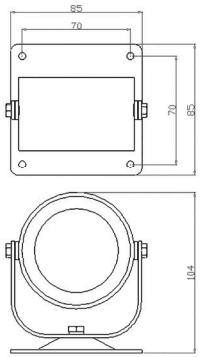

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
PL026	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant current	350mA	Series	3M 2X0.75mm² Cable	6W	500LM	85X85X104	N/A
PL026D	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	3M 2X0.75mm² Cable	6.5W	500LM	85X85X104	N/A
PL026RGB	CREE	2R+2G+2B	S10/F40	Constant current	350mA	Series	2x3M 4X0.5mm² Cable	6W	N/A	85X85X104	N/A
PL026DMX-RGB	CREE	2R+2G+2B	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	85X85X104	N/A
PL026DMX-RGB	Edison	RGB(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	85X85X104	N/A
PL026DMX-RGBW	Edison	RGBW(Fullcolor)	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	1.1M 4X0.5mm² Cable	6.5W	N/A	85X85X104	N/A

DMX decoder in built

*IES Data support.

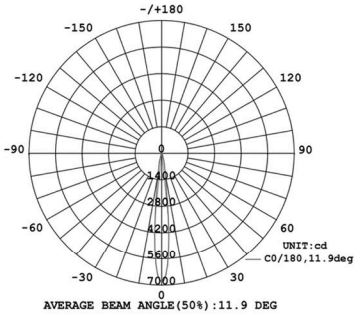



LED Colours



White 3000K White 4000K White 6000K RGB

EURBORN®

LINE LIGHT

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

EU2009

120 degree optic as standard for light projection. Aluminum construction rated to IP65, suitable for exterior applications. Supplied with optional mounting clips allowing for the fixture to be angled.

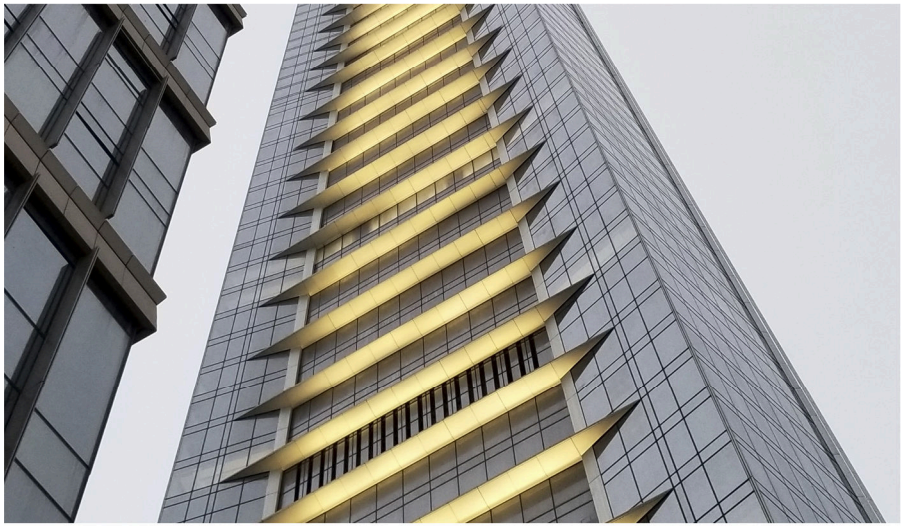

DESCRIPTION

LED Light source	SMD LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	120°
Power	12W / 6.5W
Power supply	N/A
Dimention	1000X45X50 / 500X45X50
Weight	N/A
IP Rating	IP65
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	IIndoor/Outdoor
Optional brand	OSRAM

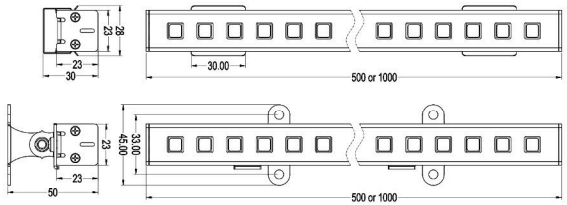

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention
EU2009-1M	OSRAM	CW,WW,NW	120°	Constant voltage	24VDC	Parallel	0.2M 2X1.0mm² Plug	12W	1000LM	1000X45X50
EU2009-0.5M	OSRAM	CW,WW,NW	120°	Constant voltage	24VDC	Parallel	0.2M 2X1.0mm² Plug	6.5W	500LM	500X45X50
EU2009DMX-1M	EDISON	RGB	120°	Constant voltage	24VDC DMX controniler	Parallel	0.2M 4X0.5mm² Plug	12W	N/A	1000X45X50
EU2009DMX-0.5M	EDISON	RGB	120°	Constant voltage	24VDC DMX controniler	Parallel	0.2M 4X0.5mm² Plug	6.5W	N/A	500X45X50

DMX decoder in built

*IES Data support.



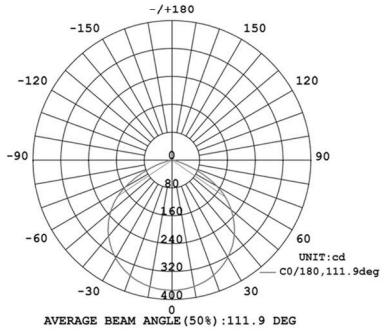

LED Colours



White 3000K White 4000K White 6000K RGB

EU2009HP

10/20/30/45/60/10x40 degree optic as standard for light projection. Aluminum construction rated to IP65, suitable for exterior applications. Supplied with optional mounting clips allowing for the fixture to be angled.

DESCRIPTION

LED Light source	Hight Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	10°/20°/30°/45°/60°/10X40°
Power	18W / 9W
Power supply	N/A
Dimention	1000X45X50 / 500X45X50
Weight	N/A
IP Rating	IP65
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	IIndoor/Outdoor
Optional brand	CREE

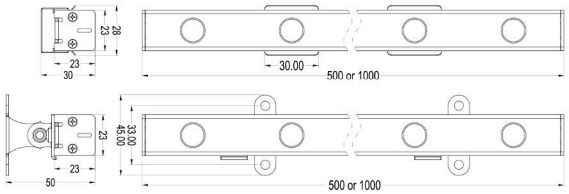

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous	Dimention Flux
EU2009HP-1M	CREE	CW,WW,NW,Red Green,Blue,Amber	10°/20°/30°/45° /60°/10X40°	Constant voltage	24VDC	Parallel	0.2M 2X1.0mm² Plug	18W	1000LM	1000X45X50
EU2009HP-0.5M	CREE	CW,WW,NW,Red Green,Blue,Amber	10°/20°/30°/45° /60°/10X40°	Constant voltage	24VDC	Parallel	0.2M 2X1.0mm² Plug	9W	500LM	500X45X50

*IES Data support.



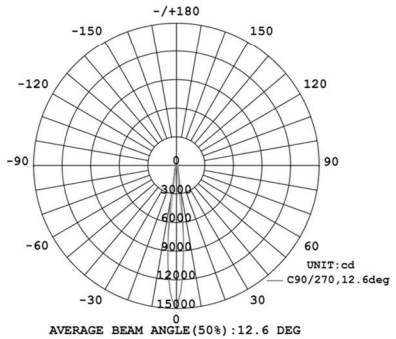

LED Colours



White 3000K White 4000K White 6000K RGB

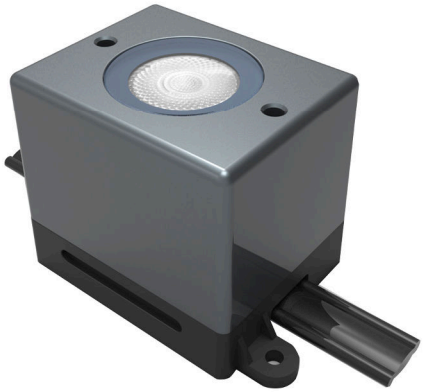

EU2001

Square recessed fixture complete with integral CREE LED package and 20/60 degree beam option. Tempered glass, Aluminum option with construction rated to IP66. Small Product footprint ensures versatile application. Easy to install into the panels.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber,RGB,RGBW
Material	Aluminium
Optics	S20° / F60°
Power	2W
Power supply	24VDC
Dimention	L69xW44xH41
Weight	150g
IP Rating	IP66
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

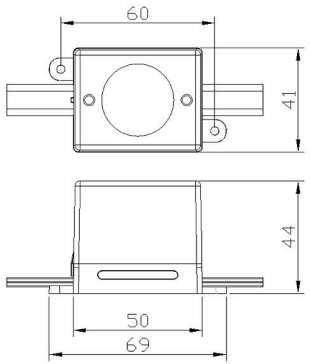

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU2001D	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20 ° / F60 °	Constant voltage	24VDC	Parallel	0.5M 2X1.0mm ² Cable	2W	150LM	L69xW44xH41	N/A
EU2001DMX	CREE	CW,WW,NW,Red, Green,Blue,Amber	S20 ° / F60 °	Constant voltage DMX	24VDC DMX	Parallel	0.5M 2X1.0mm ² +4*0.2mm Cable	2W	150LM	L69xW44xH41	N/A
EU2001DMX	EDISON	RGB,RGBW	S20 ° / F60 °	Constant voltage DMX	24VDC DMX	Parallel	0.5M 2X1.0mm ² +4*0.2mm Cable	3W	50LM	L69xW44xH41	N/A

DMX decoder in built

*IES Data support.

*Length could be customized

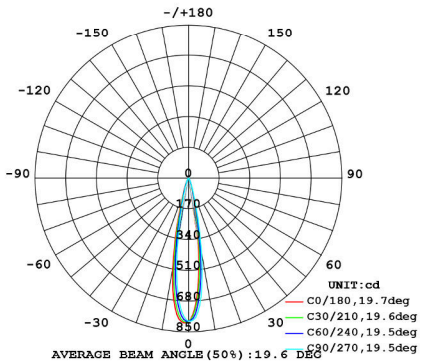

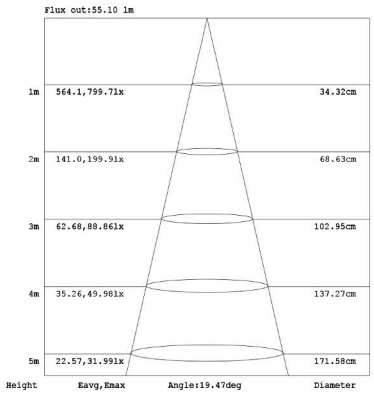

LED Colours

White 3000K White 4000K White 6000K RGB

EU2006

Finished to a high standard using anodized aluminum makes it suitable for both indoor and outdoor applications, construction rated to IP67 and configured to 3 degree beam angle.

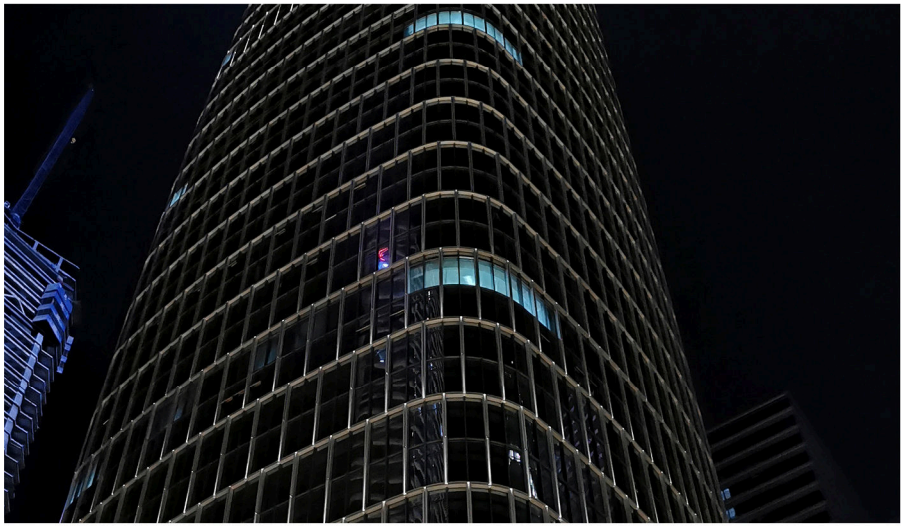

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW
Material	Aluminium
Optics	3°
Power	7W
Power supply	N/A
Dimention	D60XH76
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape
Optional brand	CREE

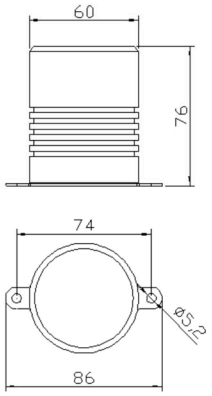

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU2006	CREE	CW,WW,NW	3°	Constant current 600mA@11.3VDC		Series	1.1M 2X0.75mm² Cable	7W	600LM	D60XH76	
EU2006D	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	1.1M 2X0.75mm² Cable	7.5W	600LM	D60XH76	
EU2006DMX	CREE	CW,WW,NW	3°	Constant voltage	24VDC	Parallel	1.1M 4X0.5mm² Cable	7.5W	600LM	D60XH76	

*IES Data support.

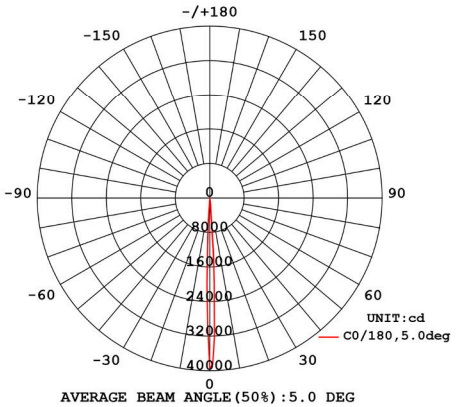

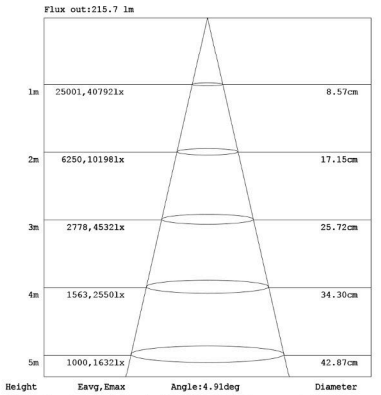

LED Colours

White 3000K White 4000K White 6000K

LL700

Recessed linear fixture rated to IP67. Wall/ floor -recessed luminaire for use with fluorescent lamps and LEDs. Tempered glass with integrated CREE XPE LED chipset. Luminaire ready for pass-through wiring.

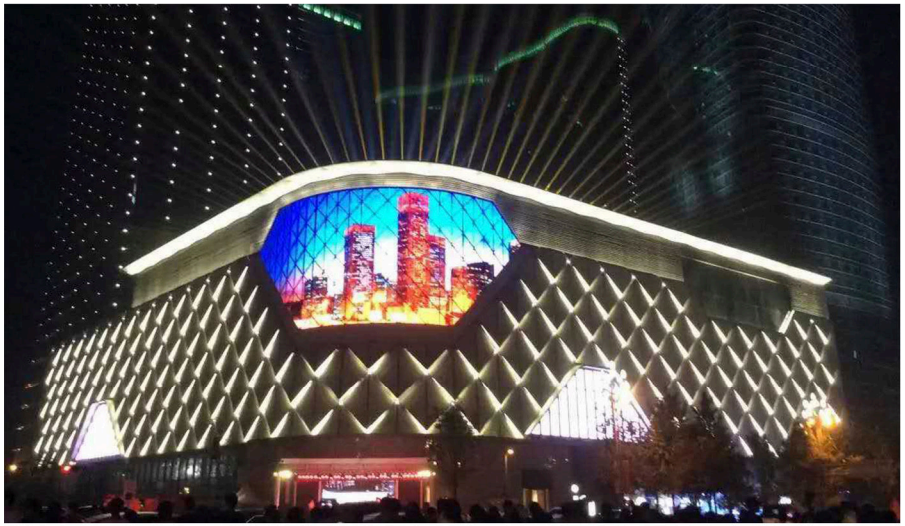

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum
Optics	10° / 20° / 40° / 60°
Power	N/A
Power supply	N/A
Dimention	1000X45XH56
Weight	1.8KG
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

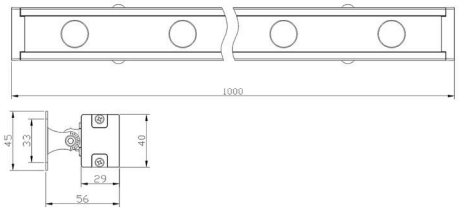

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous	Dimention	DrillSize
LL700D-1M-12	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	13W	1200LM	1000X45XH56	N/A
LL700D-1M-24	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	26W	2400LM	1000X45XH56	N/A
LL700D-0.5M-6	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	6.5W	600LM	500X45XH56	N/A
LL700D-0.5M-12	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	13W	1200LM	500X45XH56	N/A
LL700D-0.3M-4	CREE	CW,WW, NW,Red Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC	Parallel	0.5M 4X0.5mm² Cable or 0.2M Plug	4.5W	400LM	300X45XH56	N/A
LL700D-1M-12-M	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	0.5M 2X0.75mm² Cable or 0.2M Plug	13W	1200LM	1000X45XH56	N/A
LL700-1M-12-DMX	CREE	CW,WW, NW, Red,Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	0.5M 4X0.5mm² Cable or 0.2M Plug	13W	1200LM	1000X45XH56	N/A
LL700-1M-24-DMX	CREE	CW,WW, NW, Red,Green,Blue,Amber	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	0.5M 4X0.5mm² Cable or 0.2M Plug	26W	2400LM	1000X45XH56	N/A
LL700-1M-16-DMX-RGBW	CREE	4R+4G+4B+4W	10/S20/40/F60	Constant voltage	24VDC DMX Controller	Parallel	0.5M 4X0.5mm² Cable or 0.2M Plug	17W	N/A	1000X45XH56	N/A

DMX decoder in built

*IES Data support.
*Length could be customized





LED Colours



White 3000K White 4000K White 6000K RGB

IP67 F

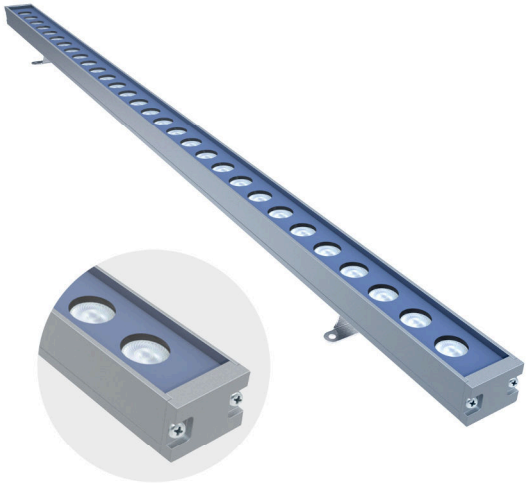

LL710

Recessed linear fixture rated to IP67. Wall/ floor-recessed luminaire for use with fluorescent lamps and LEDs. Tempered glass with integrated CREE XPE LED chipset. Luminaire ready for pass-through wiring.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	15° / 20° / 30° / 45°/ 60°
Power	12W
Power supply	24VDC
Dimention	1000X40XH55
Weight	N/A
IP Rating	IP67
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

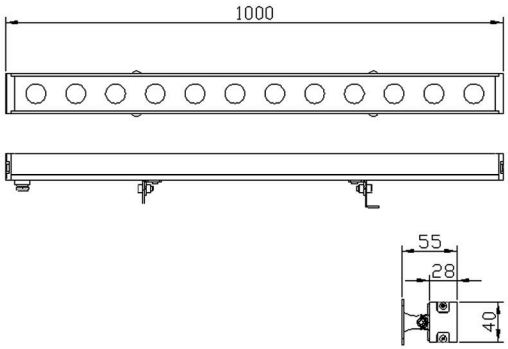

MODEL NO.	LED Brand	Color	BEAM	PowerMode	Input	Wiring	Power	Luminous	Dimention	DrillSize
LL710D	CREE	CW,WW, NW,Red Green,Blue,Amber	15/S20/30/45/F60	Constant voltage	24VDC	Parallel	12W	800LM	1000X40XH55	N/A
LL710DM	OSRAM	CW,WW, NW,Red Green,Blue,Amber	120	Constant voltage	24VDC	Parallel	12W	500LM	1000X40XH55	N/A
LL710DMX-RGB	CREE	4R+4G+4B	15/S20/30/45/F60	Constant voltage	24VDC DMX Controller	Parallel	12W	N/A	1000X40XH55	N/A
LL710-1M-12W -DMX-RGB	Edison	RGB(FullColor)	15/S20/30/45/F60	Constant voltage	24VDC DMX Controller	Parallel	12W	N/A	1000X40XH55	N/A

DMX decoder in built

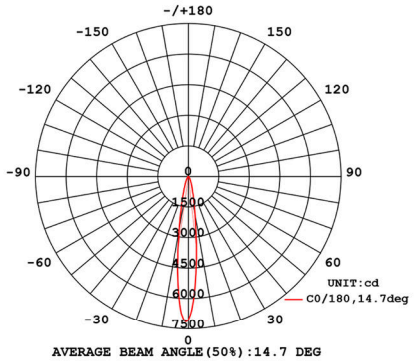

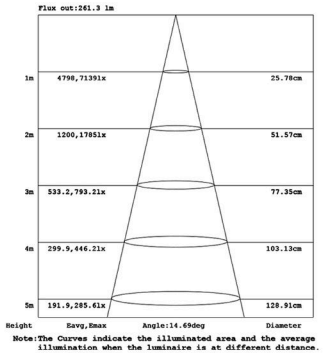

LED Colours



White 3000K White 4000K White 6000K RGB

IP67 F

EURBORN®

LED COMPONENTS

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

LED03

A 50mm MR16 LED for retrofitting into existing LV housings,including ground lights,down lights,and wall lights.Tempered glass,The three high-power LEDs within this 3W unit come in a range of LED colors and emit the same intensity of light as a 20w halogen. It has a short rear heat sink for fitting into shallow housings, and a choice of flood(60°) or spot(20°) lens formats.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum
Optics	S20° / F60°
Power	3W
Power supply	N/A
Dimention	D50X25
Weight	100g
IP Rating	IP40
Approvals	CE,RoHS,IP
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor

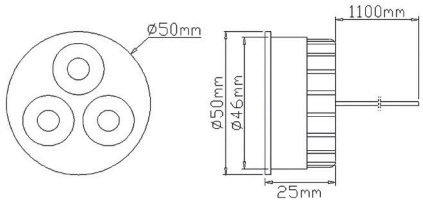

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
LED03	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4MM^2 Cable	3W	300LM	D50X25	D47
LED03RGB	CREE	RGB	S20/F60	Constant current	RGB350mA	Series	2x1.1M 4X24AWG Plug	3W	N/A	D50X25	D47

*IES Data support.



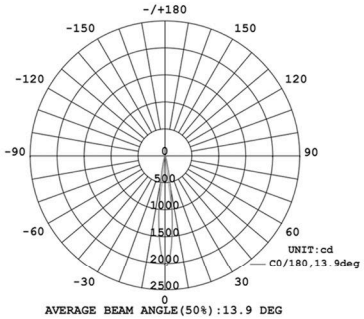

LED Colours



White 3000K White 4000K White 6000K RGB

LED09

This low-energy, 50mm MR16 LED unit is a cost-saving alternative to expensive and maintenance hungry LV and GU halogens. It's a zero maintenance replacement that fits straight into existing Lv housings, including ground lights, down lights, and wall lights.Tempered glass. The three high-power LEDs within this 9w lamp emit more light than a 35W halogen, yet they run at a fraction of the cost.

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum
Optics	S20° / F60°
Power	9W
Power supply	N/A
Dimention	D50X55
Weight	150g
IP Rating	IP40
Approvals	CE,RoHS,IP
Average life	50,000Hrs
Applications	Indoor

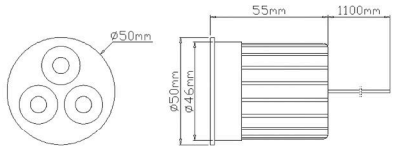

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
LED09	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	700mA	Series	1.1M 2X0.4MM^2 Cable	9W	N/A	D50X55	D47
LED09RGB	EDISON	RGB	45	Constant current	RGB350mA	Series	1.1M 4X24AWG Plug	9W	N/A	D50X55	D47

*IES Data support.



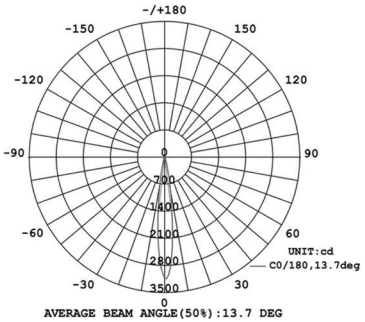

LED Colours



White 3000K White 4000K White 6000K RGB

EURBORN®

WALL LIGHT

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

EU1808

Miniature recessed fixture complete with integral CREE LED package and 60 degree beam option. Aluminum surface mounted projector.Tempered glass with construction rated to IP44 with single aperture for asymmetric emission. Product footprint of 64mm diameter ensures versatile application. Easy to install into the panels.

DESCRIPTION

LED Light source:	Hight Power LED
Light Color:	CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	60°
Power	1W/3W
Power supply	N/A
Dimention	D64X43
Wight	170g
IP Rating	IP44
Approvals	CE,RoHS
Ambient temperature	-20°C~+45°C
Average Life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor

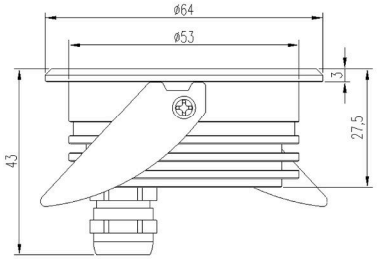

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1808	CREE	CW,WW,NW,Red, Green,Blue,Amber	60 °	Constant current	350mA	Series	0.5m 2*0.75 H05RN-F Cable	1W	95LM	D64X43	D60
EU1808-3W	CREE	CW,WW,NW,Red, Green,Blue,Amber	60 °	Constant current	700mA	Series	0.5m 2*0.75 H05RN-F Cable	3W	160LM	D64X43	D60

*IES Data support.

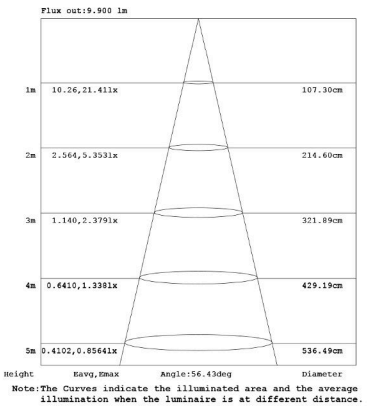

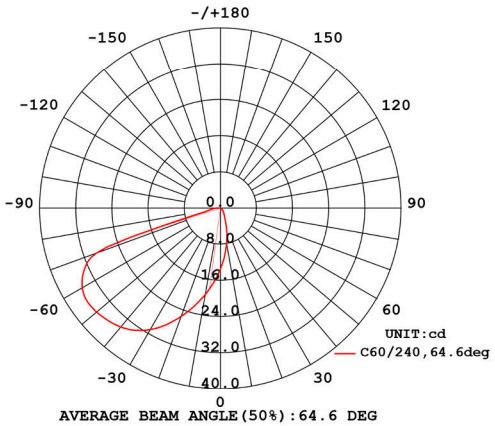

LED Colours

White 3000K White 4000K White 6000K

IP44 F

EU1820

Miniature recessed fixture complete with integral OSRAM LED package and 70 degree beam option. IP65 wall light is made of Aluminum.Frosted optic serves to minimize glare coupled with a diffuse beam distribution.Small Product footprint ensures versatile application.Easy to install into the panels.

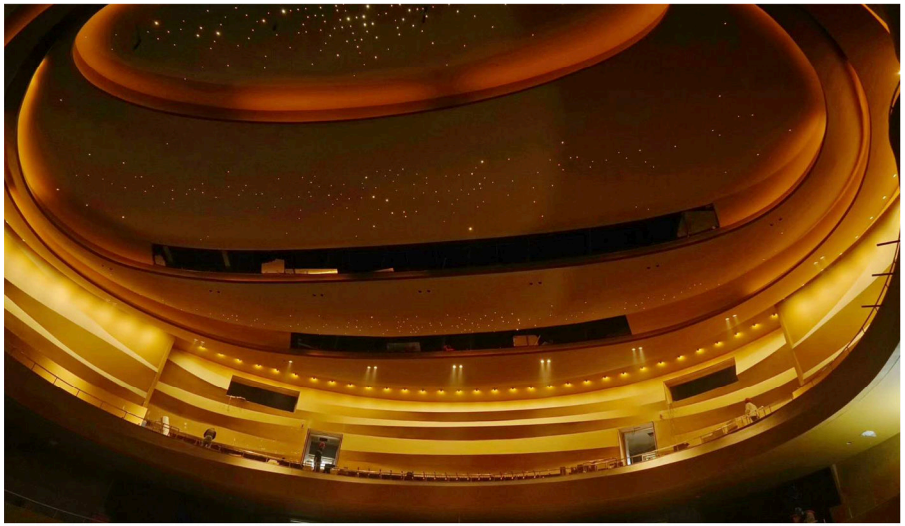

DESCRIPTION

LED Light source	LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	70°
Power	1W / 0.3W
Power supply	350mA/24VDC
Dimention	D24XH25
Weight	30g
IP Rating	IP65
Approvals	CE,RoHS
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	YES
Applications	Indoor

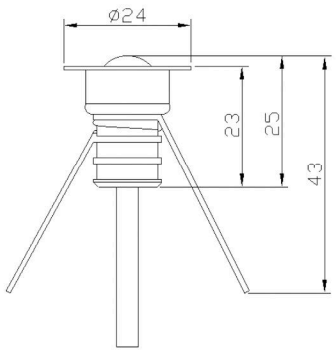

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
EU1820	OSRAM	CW,WW,NW,Red, Green,Blue,Amber	70 °	Constant current	350mA	Series	0.5M 2X0.4mm² Cable	1W	60LM	D24XH25	D17
EU1820D	OSRAM	CW,WW,NW,Red, Green,Blue,Amber	70 °	Constant voltage	24VDC	Parallel	0.5M 2X0.4mm² Cable	1W	60LM	D24XH25	D17
EU1820D-0.3	OSRAM	CW,WW,NW,Red, Green,Blue,Amber	70 °	Constant voltage	24VDC	Parallel	0.5M 2X0.4mm² Cable	0.3W	20LM	D24XH25	D17

*IES Data support.

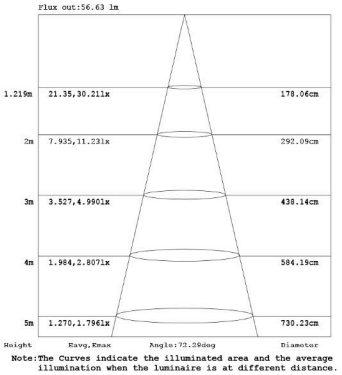

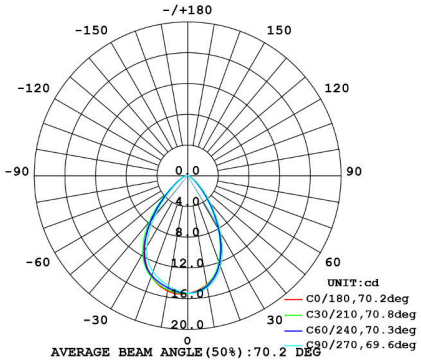

LED Colours

White 3000K White 4000K White 6000K

IP65 F

ML101

A modern day and elegant LED decorative mini-light, it is designed to add style to floors, bars, walls and ceilings. Walkover and IP68 rated. The clever and stylish design of the light output means no glare even when looking directly at it, making this product perfect for stair facings. Using only 1W of energy makes running costs incredibly low, whilst visual impact is high.Tempered glass. Made from marine grade stainless steel and IP rated to 68 ensures you can use this product indoors or out.

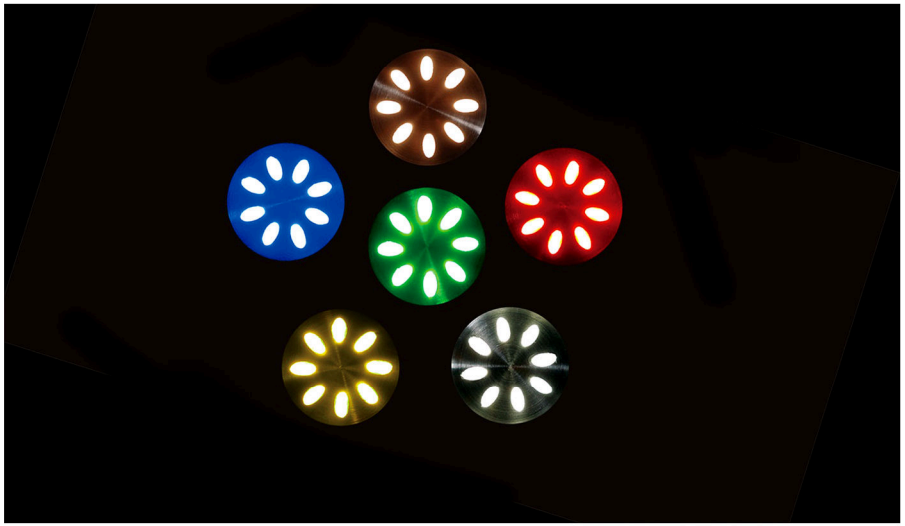

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	N/A
Power	1W
Power supply	N/A
Dimention	D35X28
Weight	70g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible

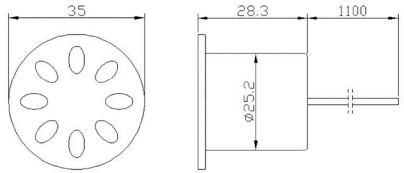

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML101	CREE	CW,WW. NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	N/A	D35X28	D26
ML101D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	N/A	D35X28	D26
ML101RGB	EDISON	RGB	N/A	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D35X28	D26

*IES Data support.

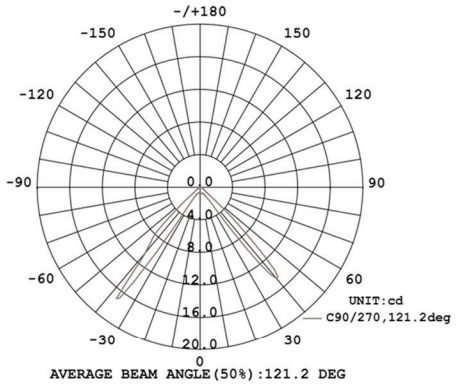

LED Colours



White 3000K White 4000K White 6000K RGB

ML1022

ML1022-30

ML1021

ML102

Miniature display light featuring Stainless Steel construction rated to IP65 making this product suitable for both interior and exterior applications. The product is directional and thus perfect for lighting focal features on the wall or within display cabinets. Tempered glass.Incorporates an integrated CREE USA LED white chip set powered at 1W or 2W. A low energy, no maintenance solution

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W/2W
Power supply	N/A
Dimention	N/A
Weight	N/A
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape

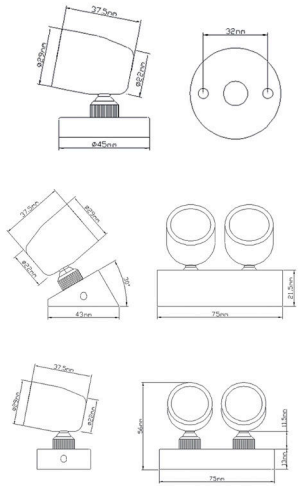

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML1021	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1W	1.1M 2X24AWG Cable	100LM	D45X53	N/A
ML1022	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	2W	1.1M 2X24AWG Cable	200LM	35X75X56	N/A
ML1022-30	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	2W	1.1M 2X24AWG Cable	200LM	43X75X56	N/A

*IES Data support.



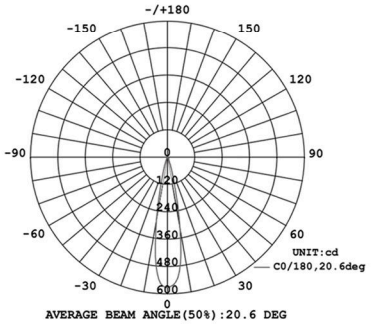

LED Colours

White 3000K White 4000K White 6000K

IP65 F

ML102-L

ML102-2L

ML102-L

Mini wall lights are stylish and functional. Great for lighting pictures and focal items, as well as using for reading or simply adding style to walls,wooden beams and ceilings. Tempered glass. Made from marine grade stainless and IP rated to 40 allows for installation both indoor. You can chose from 6 ambient LED colors and 3 wall mounting brackets to suit any lighting scheme.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	1W/2W
Power supply	N/A
Dimention	N/A
Weight	N/A
IP Rating	IP40
Approvals	CE,RoHS
Accessories(Optional)	N/A
Applications	Indoor



MODEL NO.	LED Brand	Color	BEAM	PowerMode	Input	Wiring	Power	Luminous	Dimention	DrillSize
ML102-L	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	100-240VAC	Parallel	1W	100LM	88X88X80	N/A
ML102-2L	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	100-240VAC	Parallel	2W	200LM	88X88X80	N/A

*IES Data support.



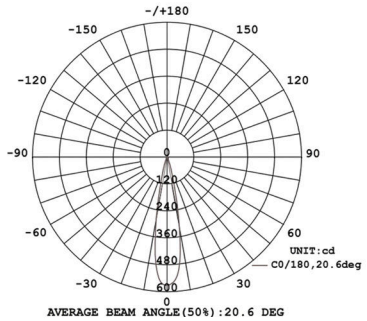

LED Colours

White 3000K

White 4000K

White 6000K

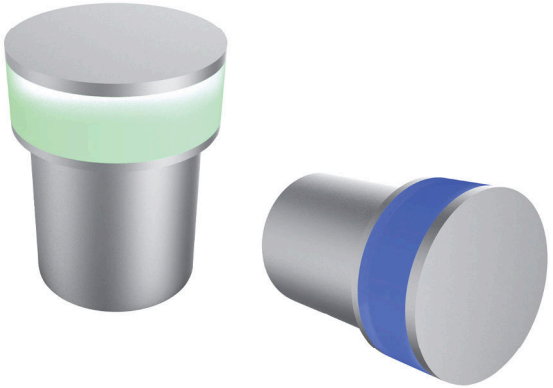

ML103

Add impact to any area with the ML103 wall light. An elegant 'halo' effect is created around the unit in a choice of 7 ambient LED colors. Tempered glass. Finished to a high standard using anodized aluminum, this trendy mini-light will look great in superior establishments and homes.

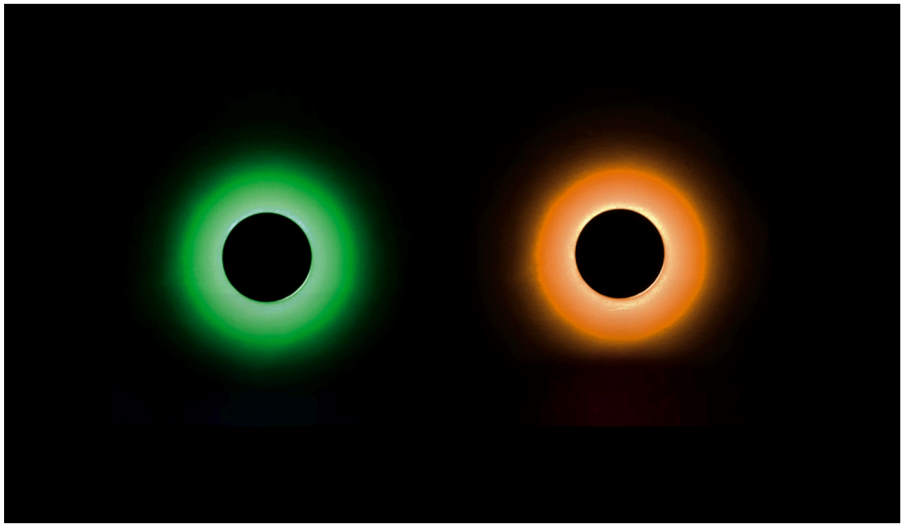

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminlum
Optics	N/A
Power	1W
Power supply	N/A
Dimention	D32X44
Weight	56g
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

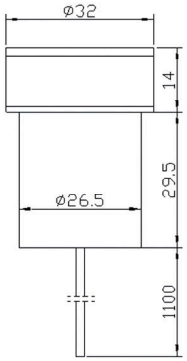

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML103	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm²	1W	N/A	D32X44	D27
ML103D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.3W	N/A	D32X44	D27
ML103RGB	Edison	RGB	N/A	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	D32X44	D27

*IES Data support.

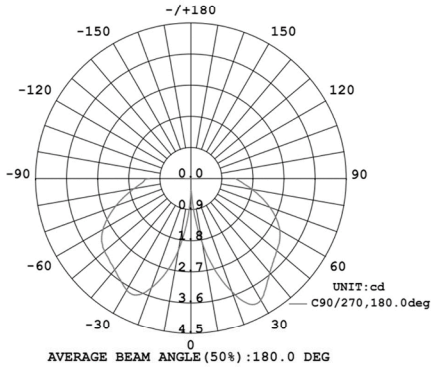

LED Colours



White 3000K White 4000K White 6000K RGB

ML104

Contemporary, chic, yet rugged, the ML104 decorative mini-light adds style to floors, bars, walls and stairs. Tempered glass. Made from marine grade stainless steel and IP rated to 68 ensures you can use this product indoors or out.

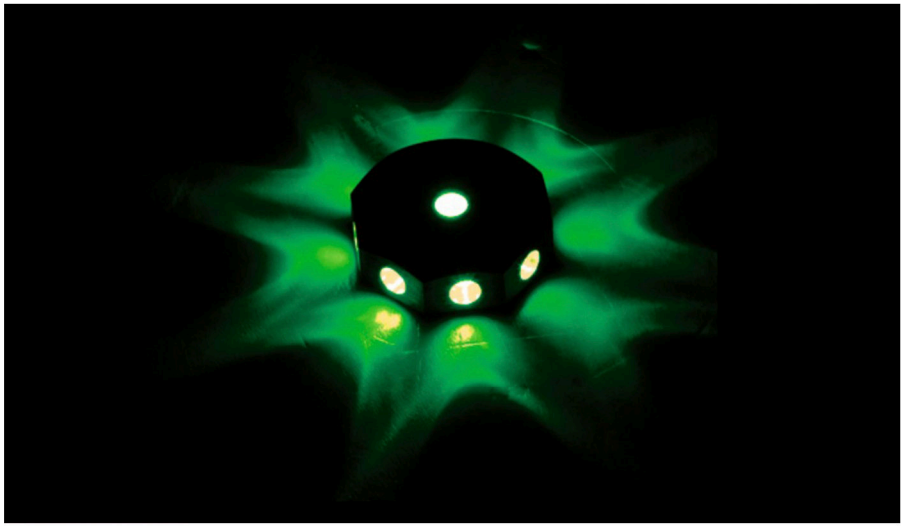

DESCRIPTION

LED Light source	High Power LED
Light Color	RGB,CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	N/A
Power	1W
Power supply	N/A
Dimention	38X38X30
Weight	110g
IP Rating	IP68
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape/Submersible



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML104	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	N/A	38X38X30	D27
ML104D	CREE	CW,WW, NW,Red Green,Blue,Amber	N/A	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1.2W	N/A	38X38X30	D27
ML104RGB	Edison	RGB	N/A	Constant voltage	RGB24VDC	Parallel	1.1M 4X24AWG Cable	1W	N/A	38X38X30	D27

*IES Data support.

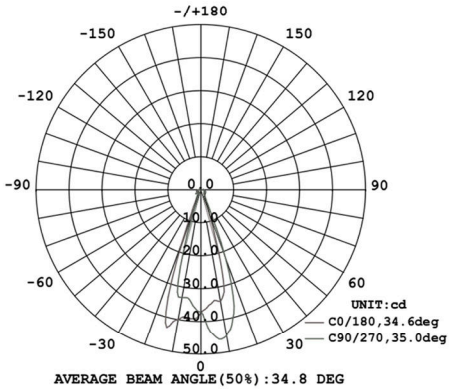

LED Colours

White 3000K

White 4000K

White 6000K

RGB

ML105

Tempered glass. This anodized aluminum version of our ML105 provides a sleeker, less obtrusive presence in your garden. It gives you the choice of LED colors, wide or narrow beam angles and ±100° tilting head.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	S20° / F60°
Power	1X3W
Power supply	N/A
Dimention	D45X70
Weight	N/A
IP Rating	IP65
Approvals	CE,RoHS,IP
Accessories(Optional)	N/A
Applications	Indoor/Outdoor

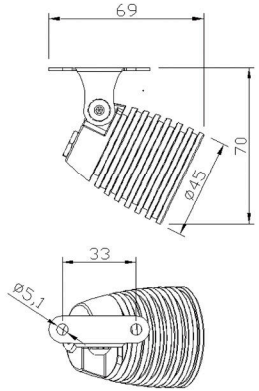

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML105	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	700mA	Series	1.1M 2X0.4mm² Cable	1X3W	N/A	D45X70	N/A
ML105D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.4mm² Cable	1X3W	N/A	D45X70	N/A

*IES Data support.

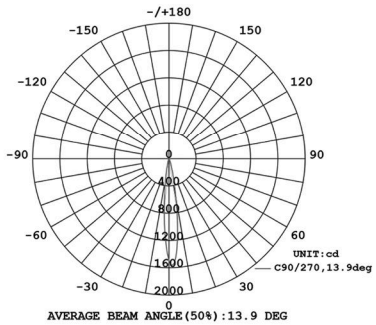



LED Colours

White 3000K White 4000K White 6000K

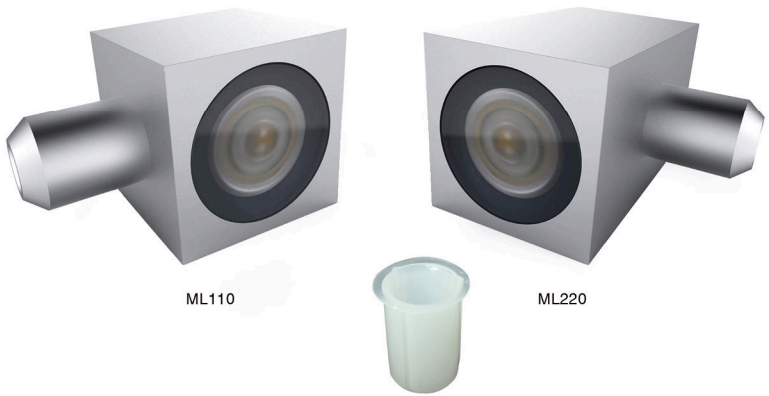

ML110

Stylish, functional and finished to the highest standards in aluminum,this item creates stunning effects on walls in both residential and commercial environments. Using a spot lens keeps the light narrow and direct, sending light over long distances. By using the provided wall plug, installation will be quick and easy, this will also give you the option of adjusting the direction of the light by simply turning the product whilst in the wall. Tempered glass.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	Aluminium
Optics	S20° / F60°
Power	1W/2W
Power supply	N/A
Dimention	N/A
Weight	100g/160g
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	Yes
Applications	Indoor/Outdoor/Landscape

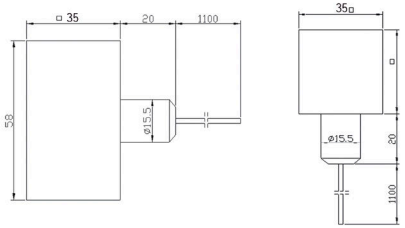

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
ML110	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	1W	100LM	35x35x55	D20
ML220	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	1.1M 2X0.4mm² Cable	2W	200LM	35x58x55	D20

*IES Data support.

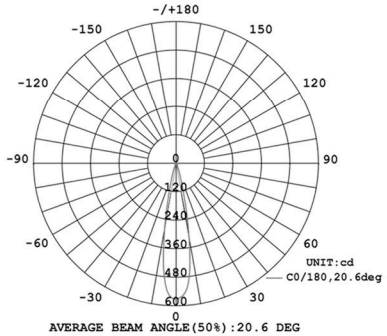



LED Colours

White 3000K White 4000K White 6000K

ML110-L

Stylish, functional and finished to the highest standards in aluminum,it creates stunning effects on walls in both residential and commercial environments. Using a spot lens keeps the light narrow and direct,sending light over long distances. Complete with an integral power supply, wall fixings and pattress box, making installation quick and easy Tempered glass.

DESCRIPTION

LED LIGHT SOURCE	High Power LED
LIGHT COLOR	CW,WW,NW,Red,Green,Blue,Amber
MATERIAL	Aluminlum
OPTICS	S20° / F60°
POWER	1W
POWER SUPPLY	N/A
DIMENSION	N/A
WEIGHT	N/A
IP RATING	IP40
APPROVALS	CE,RoHS
ACCESSORIES(OPTIONAL)	N/A





MODEL NO.	LED Brand	Color	BEAM	PowerMode	Input	Wiring	Power	Luminous Flux	Dimention	DrillSize
ML110-L	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	100-240VAC	Parallel	1W	100LM	88x88x80	N/A
ML220-L	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	100-240VAC	Parallel	2W	200LM	88x88x80	N/A

*IES Data support.



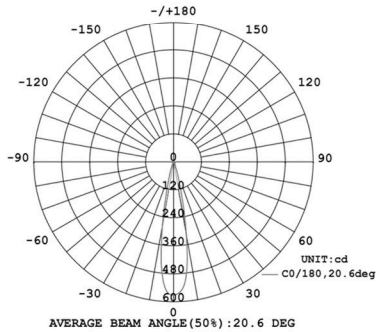

LED Colours

White 3000K White 4000K White 6000K

F IP40

EURBORN®
SPIKE LIGHT
SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

SL100

This black anodized aluminum version of our SL100 spike light provides less obtrusive presence in your garden. Tempered glass.It gives you the(choice of LED colors, wide or narrow beam angles and 135º tilting head.

DESCRIPTION

LED Light source	COB LED
Light Color	CW,WW,NW
Material	Aluminlum
Optics	S24° / 40° / F60°
Power	16W
Power supply	24VDC
Dimention	D100X277
Weight	750g
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
SL100	CREE	WW3000K	S24/40/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.75mm² Cable	16W	1600LM	D100X277	N/A
SL100	CREE	NW4200K	S24/40/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.75mm² Cable	16W	1600LM	D100X277	N/A
SL100	CREE	CW5000K	S24/40/F60	Constant voltage	24VDC	Parallel	1.1M 2X0.75mm² Cable	16W	1760LM	D100X277	N/A

*IES Data support.



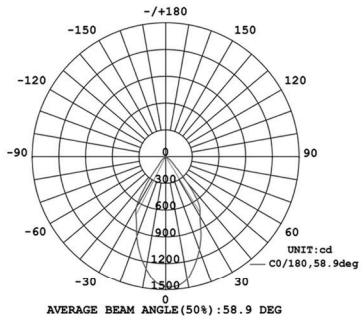

LED Colours

White 3000K White 4000K White 6000K

IP65 F

SL131

Marine grade 316 stainless steel in-ground spike fixture complete with integral CREE LED package. Tempered glass. 12/45 degree beam options. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S12° / F45°
Power	1W
Power supply	N/A
Dimention	D42X420
Weight	630g
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
SL131	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant current	350mA	Series	3M 2X0.75mm² Cable	1W	100LM	D42X420	N/A
SL131D	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	3M 2X0.75mm²	1.3W	100LM	D42X420	N/A

*IES Data support.

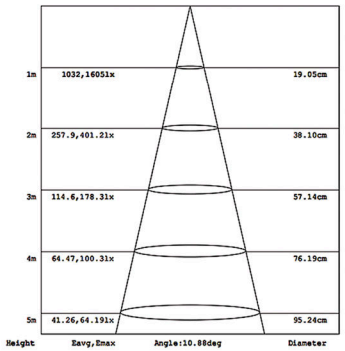

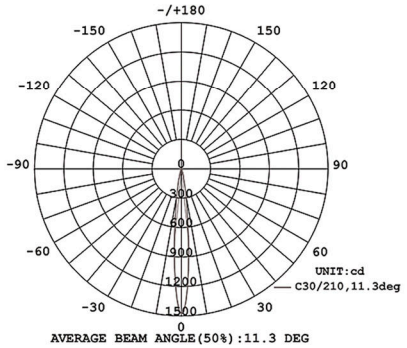

LED Colours

White 3000K White 4000K White 6000K

IP65 F

SL133

Marine grade 316 stainless steel in-ground spike fixture complete with integral CREE LED package. Tempered glass. 20/60 degree beam options. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements.

DESCRIPTION

LED Light source	High Power LED
Light Color	CW,WW,NW,Red,Green,Blue,Amber
Material	SUS316
Optics	S20° / F60°
Power	3W
Power supply	N/A
Dimention	D66X465
Weight	925g
IP Rating	IP65
Approvals	CE,RoHS,IP
Ambient temperature	-20℃ ~ +45℃
Average life	50,000Hrs
Accessories(Optional)	N/A
Applications	Indoor/Outdoor/Landscape



Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
SL133	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant current	350mA	Series	3M 2X0.75mm² Cable	3W	300LM	D66X465	N/A
SL133D	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	12/24VDC	Parallel	3M 2X0.75mm² Cable	3.5W	300LM	D66X465	N/A

*IES Data support.



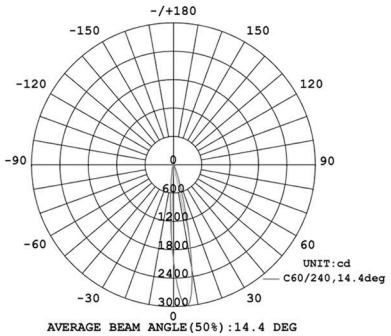

LED Colours

White 3000K White 4000K White 6000K

IP65 F

QUICK INSTALL LIGHT

EURBORN®

GL116D-LS GROUND LIGHT

LED Colours

White 3000K White 4000K White 6000K

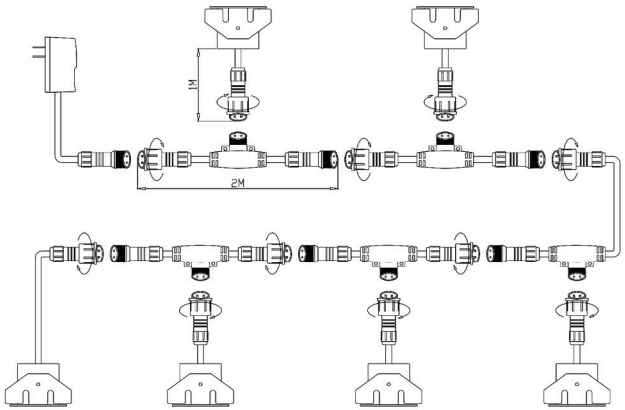

DESCRIPTION

LED LIGHT SOURCE	High Power LED
LIGHT COLOR	CW,WW,NW,Amber,Red,Green,Blue
MATERIAL	SUS316
OPTICS	See attached sheet
POWER	See attached sheet
POWER INPUT	24VDC
DIMENSION	See attached sheet
WEIGHT	N/A
IP RATING	IP65
APPROVALS	CE,RoHS
ACCESSORIES	Constant voltage Driver
APPLICATIONS	Courtyards, corridors, squares, etc

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL116D-LS	CREE	CW,WW, NW,Red Green,Blue,Amber	S12/F45	Constant voltage	24VDC	Parallel	2X0.75mm² Plug	6x1.3W	600LM	D60XH45	D50
GL140D-LS	CREE	CW,WW, NW,Red Green,Blue,Amber	S20/F60	Constant voltage	24VDC	Parallel	2X0.75mm² Plug	6x3.5W	1800LM	D76XH47	D65
GL166D-LS	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	2X0.75mm² Plug	6x6.5W	3600LM	D96XH47	D85
GL168D-LS	CREE	CW,WW, NW,Red Green,Blue,Amber	S10/F40	Constant voltage	24VDC	Parallel	2X0.75mm² Plug	6x9W	4800LM	D96XH47	D85

*IES Data support.

GL116DMX-LS GROUND LIGHT

LED Colours



White 3000K White 4000K White 6000K RGB

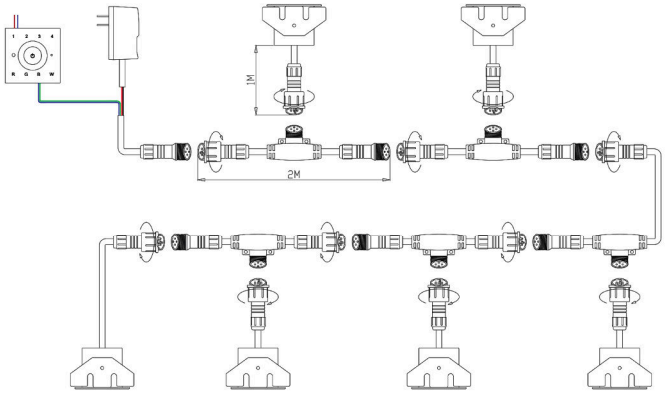

DESCRIPTION

LED LIGHT SOURCE	High Power LED
LIGHT COLOR	RGB,CW,WW,NW,Amber,Red,Green,Blue
MATERIAL	SUS316
OPTICS	See attached sheet
POWER	See attached sheet
POWER INPUT	24VDC DMX Controller
DIMENSION	See attached sheet
WEIGHT	N/A
IP RATING	IP65
APPROVALS	CE,RoHS
AMBIENT TEMPERATURE	-20℃ ~ +45℃
AVERAGE LIFE	50,000Hrs
ACCESSORIES	Constant voltage DMX Controller
APPLICATIONS	Courtyards, corridors, squares, etc

Model No.	LED Brand	Color	Beam	PowerMode	Input		Wiring	Cable	Power Flux	Luminous	Dimention
GL116DMX-LS	CREE	RGB,CW,WW,NW, Amber,Red,Green,Blue	S12/F45	Constant voltage	24VDC DMX Controller	Parallel	4X0.5mm² Plug	6x1.5W	N/A	D60XH45	D50
GL140DMX-LS	CREE	RGB,CW,WW,NW, Amber,Red,Green,Blue	S20/F60	Constant voltage	24VDC DMX Controller	Parallel	4X0.5mm² Plug	6x3.5W	N/A	D76XH47	D65
GL166DMX-LS	CREE	RGB,CW,WW,NW, Amber,Red,Green,Blue	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	4X0.5mm² Plug	6x6.5W	N/A	D96XH47	D85
GL168DMX-LS	CREE	RGB,CW,WW,NW, Amber,Red,Green,Blue	S10/F40	Constant voltage	24VDC DMX Controller	Parallel	4X0.5mm² Plug	6x9W	N/A	D96XH47	D85

DMX decoder in built

*IES Data support.

GL118RGB-LS GROUND LIGHT

LED Colours

RGB

Input:100-240AC
Output:24VDC

RF remote

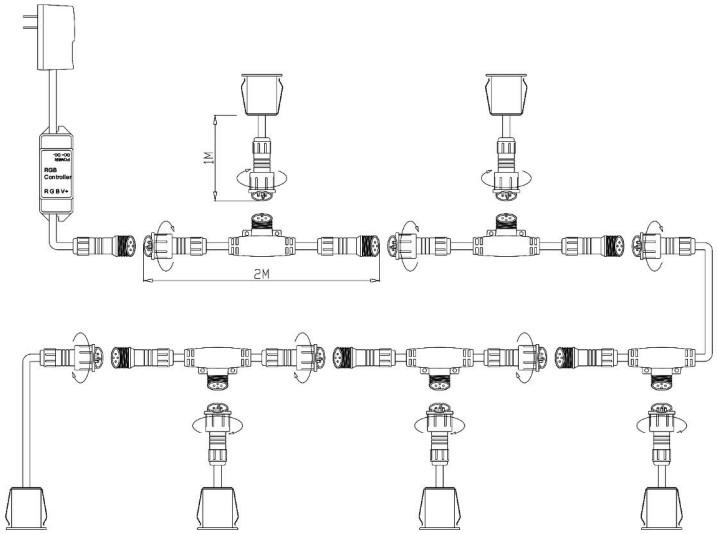

DESCRIPTION

LED LIGHT SOURCE	High Power LED
LIGHT COLOR	RGB
MATERIAL	SUS316
OPTICS	120°
POWER	See attached sheet
POWER INPUT	24VDC RGB Controller
DIMENSION	See attached sheet
WEIGHT	N/A
IP RATING	IP65
APPROVALS	CE,RoHS
AMBIENT TEMPERATURE	-20℃ ~ +45℃
AVERAGE LIFE	50,000Hrs
ACCESSORIES	Constant voltage RGB Controller
APPLICATIONS	Courtyards, corridors, squares, etc

Model No.	LED Brand	Color	Beam	PowerMode	Input	Wiring	Cable	Power	Luminous Flux	Dimention	DrillSize
GL118RGB-LS	Edison	RGB	120	Constant voltage	24VDC RGB Controller	Parallel	4X0.5mm2 Plug	6X1W	N/A	D36.3XH37	D29
GL550RGB-LS	Edison	RGB	120	Constant voltage	24VDC RGB Controller	Parallel	4X0.5mm2 Plug	6X3W	N/A	D76XH47	D65

*IES Data support.

ACCESSORIES

SPECIALIZED MANUFACTURER
LED LIGHTING PRODUCTS

EURBORN®

INSTALLATION SLEEVE FOR LAMP DESCRIPTION

Material:Aluminium

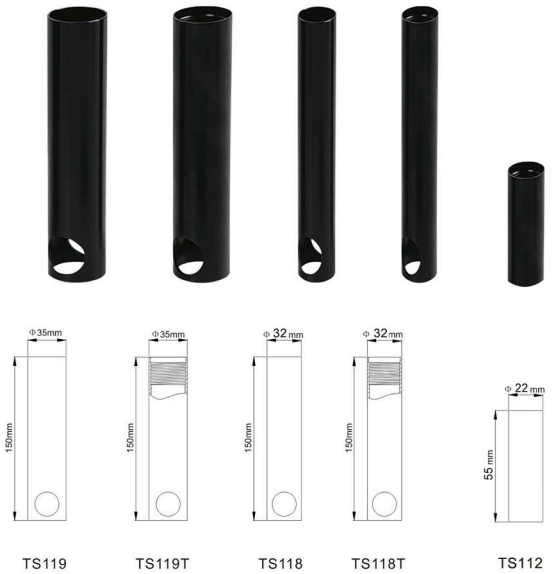

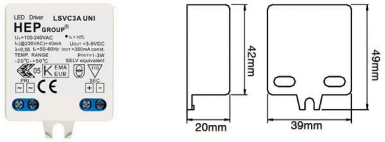

Model: LSVC3A
LED Type: High Power LED 1W x 1 to 3
Supply Voltage: 100~240V AC
Supply Current（@230V AC）: 40mA
Frequency: 50/60Hz
Power Factor: 0.55
Constant Output Current: 350mA
Rated Output Power: 1~3W
Rated Output Voltage: 3~9V DC
Temp Range: -20℃ ~ +50℃
Tc = 70℃
Size: 39 x 42 x 20mm
Weight: 30g
Approbations:

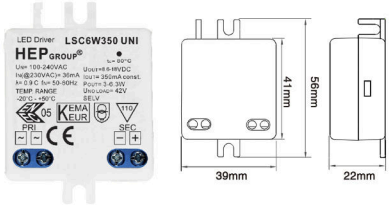

Model: LSC6W350
LED Type: High Power LED 1W x 3 to 6
Supply Voltage: 100 ~ 240V AC
Supply Current: 36mA.
Frequency: 50/60Hz
Power Factor: 0.9
Constant Output Current: 350mA
Rated Output Power: 3-6W
Rated Output Voltage: 8.6~18V DC
Temp Range: -20℃ ~ +50℃
Tc = 80℃
Size: 55.5 x 38.5 x 22mm
Weight: g
Approbations:

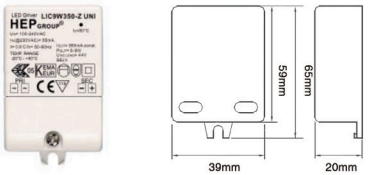

Model: LIC9W350-Z
LED Type: High Power LED 1W x 6 to 9
Supply Voltage: 100 ~ 240V AC
Supply Current: 130mA Max.
Frequency: 50/60Hz
Power Factor: 0.9
Constant Output Current: 350mA
Rated Output Power: 6~ 9W
Rated Output Voltage: 17.1~25.7V DC
Temp Range: -20℃ ~ +50℃
Tc = 80℃
Size: 65 x 39 x 20mm
Weight: 48g
Approbations:

PRODUCT FITTING ACCESSORIES



Model: LMC15W350-Z
LED Type: High Power LED 1W x 10 to 15
Supply Voltage: 220~240V AC
Supply Current: 95mA Max.
Frequency: 50/60Hz
Power Factor: 0.9
Constant Output Current: 350mA
Rated Output Power: 9.1~15W
Rated Output Voltage: 26~43V DC
Temp Range: -20℃ ~ +50℃
Tc = 80℃
Size: 85 x 41 x 22mm
Weight: 55 g
Approbations:

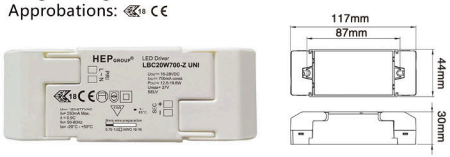

Model: LBC20W350-Z
LED Type: High Power LED 1W x 13 to 20
Supply Voltage: 100-240V AC
Supply Current: 245mA Max.
Frequency: 50/60Hz
Power Factor: 0.9
Constant Output Current: 350mA
Rated Output Power: 13~20W
Rated Output Voltage: 35~ 58V DC
Temp Range: -20℃ ~ +50℃
Tc = 85℃
Size: 117 x 44 x 30mm
Weight: 86g
Approbations:

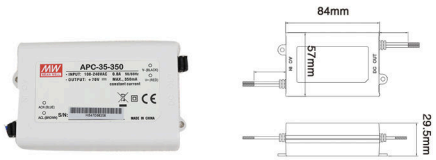

Model: APC-35-350
LED Type: High Power LED 1W x 10 to 35
Supply Voltage: 100-240V AC
Supply Current: 500mA Max.
Frequency: 50/60Hz
Power Factor: 0.84
Constant Output Current: 350mA
Rated Output Power: 10~ 35W
Rated Output Voltage: 28~ 100V DC
Temp Range: -30℃~ +70℃
Tc = 80℃
Size: 84 x 57 x 29.5mm
Weight: 150g
Approbations:



Model: CertaDrive 15W 0.35A 42V
LED Type: High Power LED 15W
Supply Voltage: 220~240V AC
Supply Current: 0.08A
Frequency: 50/60Hz
Power Factor: ≥0.9
Constant Output Current: 350mA
Rated Output Power: 11~15W
Rated Output Voltage: 32~42V DC
Temp Range: 0℃ ~ +50℃
Tc = 75℃
Size: 115 x 45 x 29mm
Approbations: CE



Model: CertaDrive 25W 0.6A 42V
LED Type: High Power LED 25W
Supply Voltage: 220~240V AC
Supply Current: 0.14A
Frequency: 50/60Hz
Power Factor: ≥0.9
Constant Output Current: 600mA
Rated Output Power: 20~25W
Rated Output Voltage: 32~42V DC
Temp Range: 0℃ ~ +50℃
Tc = 75℃
Size: 105 x 68 x 32mm
Approbations: CE

Model NO.	Output Voltage	Output Current	Output Watts
DE-60-06W	6VAC	10A	60W
DE-60-7.5W	7.5VAC	8A	60W
DE-60-09W	9VAC	6.67A	60W
DE-60-12W	12VAC	5A	60W
DE-60-15W	15VAC	4A	60W
DE-60-18W	18VAC	3.33A	60W
DE-60-20W	20VAC	3A	60W
DE-60-22W	22VAC	2.73A	60W
DE-60-24W	24VAC	2.5A	60W
DE-20-12W	12VAC	1.67A	20W

CE IP67

Input:230/240VAC 50Hz
Standard:EN61558-1 EN61558-2-6
Approval:EUROPE,UK,SAA
Size:102x64x74mm
Weight:1450g



Model: EVOS7W350
LED Type: High Power LED 1W x 1 to 6
Supply Voltage: 200~240V AC
Supply Current: 80mA.
Frequency: 50/60Hz
Power Factor: 0.5
Constant Output Current: 350mA
Rated Output Power: 1~6.7W
Rated Output Voltage: 2.7~19.2V DC
Temp Range: -20℃ ~ +50℃
Tc = 80℃
Size: 49 x 27 x 20mm

PRODUCT FITTING ACCESSORIES



Name: Junction Box
Model: EIP68-1A EIP68-1B EIP68-1C
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 45g
Approbations: ROHS

规 格 PART NUMBER	进线 Φ mm IN CABLE	出线 Φ mm OUT CABLE	内部尺寸 mm INSIDE DIMENSION
EIP68-1A	1XΦ7-10.5	1XΦ7-10.5	Φ45X30mm
EIP68-1B	1XΦ5.0-8.0	1XΦ5.0-8.0	
EIP68-1C	1XΦ7.0-10.5	1XΦ5.0-8.0	

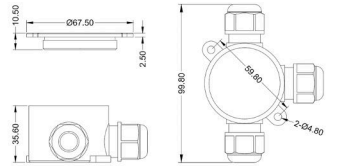

Name: Junction Box
Model: EIP68-2A EIP68-2B EIP68-2C
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 53g
Approbations: ROHS

规 格 PART NUMBER	进线 Φ mm IN CABLE	出线 Φ mm OUT CABLE	内部尺寸 mm INSIDE DIMENSION
EIP68-2A	2XΦ7.0-10.5	1XΦ7-10.5	Φ45X33.5mm
EIP68-2B	2XΦ7.0-10.5	1XΦ5.0-8.0	
EIP68-2C	2XΦ5.0-8.0	1XΦ5.0-8.0	

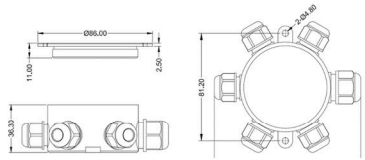

Name: Junction Box
Model: EIP68-3A EIP68-3B EIP68-3C EIP68-3D
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 65g
Approbations: ROHS

规 格 PART NUMBER	进线 Φ mm IN CABLE	出线 Φ mm OUT CABLE	内部尺寸 mm INSIDE DIMENSION
EIP68-3A	1XΦ7.0-10.5	3XΦ5-7.9	Φ55X34mm
EIP68-3B	1XΦ7.0-10.5	3XΦ5-8.3	
EIP68-3C	1XΦ5.0-8.0	3XΦ5-7.9	
EIP68-3D	1XΦ5.0-8.0	3XΦ5-8.3	

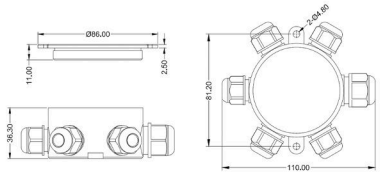

Name: Junction Box
Model: EIP68-5A EIP68-5B EIP68-5C EIP68-5D
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 78g
Approbations: ROHS

规 格 PART NUMBER	进线 Φ mm IN CABLE	出线 Φ mm OUT CABLE	内部尺寸 mm INSIDE DIMENSION
EIP68-5A	1XΦ7.0-10.5	5XΦ5-7.9	Φ62.54X34mm
EIP68-5B	1XΦ7.0-10.5	5XΦ5.0-8.3	
EIP68-5C	1XΦ5.0-8.0	5XΦ5.0-7.9	
EIP68-5D	1XΦ5.0-8.0	5XΦ5.0-8.3	

Name: Waterproof Connector
Model: KJ-PG9-07 KJ-PG9-05
Pole: 2
Rated Operation Voltage: 250V
Rated Current: 10A
Operation Temprature: -40 ~ 85℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 16.5g
Approbations: TUV SAA CE

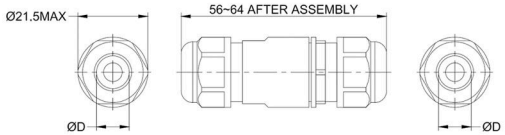

PART NUMBER	FOR CABLE DIAMETER D (MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
KJ-PG9-07	5~7.9	PG9-08B	2 POLE TERMINAL	10.0~12.0	16.0
KJ-PG9-05	3~5.3	PG9-05B			

Name: Waterproof Connector
Model: KJ-PG9-08
Pole: 3
Rated Operation Voltage: 300V
Rated Current: 10A
Operation Temprature: -40 ~ 85℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 16.5g
Approbations: TUV SAA CE

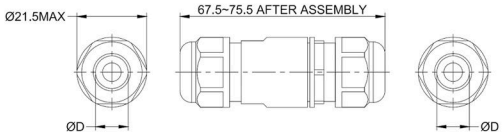

PART NUMBER	FOR CABLE DIAMETER D(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
KJ-PG9-08	4~8.2	KJ-PG9	3 POLE TERMINAL	10.0~12.0	16.0

Name: Waterproof Connector
Model: KJ-M20S-07 KJ-M20S-11 KJ4-M20S-0711
KJ4-M20S-07 KJ4-M20S-11
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 13A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 30g
Approbations: TUV SAA CE



PART NUMBER	FOR CABLE OD ΦD1(MM)	FOR CABLE OD ΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
KJ-M20S-07	5~7.9	5~7.9	M20S-07	3 POLE TERMINAL	16.0~19.0	40.0
KJ-M20S-11	7~10.5	7~10.5	M20S-11			
KJ-M20S-0711	5~7.9	7~10.5	M20S-11			
KJ4-M20S-07	5~7.9	5~7.9	M20S-07	4 POLE TERMINAL	16.0~19.0	40.0
KJ4-M20S-11	7~10.5	7~10.5	M20S-11			

Name: Waterproof Connector
Model: KJ-M25S-08 KJ-M25S-10
KJ-M25S-12 KJ-M25S-1214
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 50g
Approbations: TUV SAA CE



PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE ΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
KJ-M25S-08	5~8.1	8~12	M25S-08	3 or 4 POLE TERMINAL	20~23 20~23	50 50
KJ-M25S-12	8~12	8~12	M25S-12			
KJ-M25S-14	10~14	10~14	M25S-14			
KJ-M25S-1214	10~14	8~12	M25S-12			

Name: Waterproof Connector
Model: KJ5-M25S-08 KJ5-M25S-10
KJ5-M25S-12 KJ5-M25S-1214
Pole: 5
Rated Operation Voltage: 500V
Rated Current: 13A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 50g
Approbations: TUV SAA CE



PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE ΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
KJ5-M25S-08	8~8.1	8~12	M25S-08	5 POLE TERMINAL	20~23 20~23	50 50
KJ5-M25S-12	8~12	8~12	M25S-12			
KJ5-M25S-14	10~14	10~14	M25S-14			
KJ5-M25S-1214	10~14	8~12	M25S-12			

Name: Waterproof Connector
Model: 3T-M20-0806H2 3T-M20-1006H2
Pole: 3
Rated Operation Voltage: 400V
Rated Current: 13A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 36g
Approbations: TUV SAA CE



PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 2ΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
3T-M20-0806H2	4~8.1	4~6.5	M20-H2-06	3 POLE TERMINAL	Small 16.0~19.0 Big 20.0~23.0	Small 40 Big 50
3T-M20-1006H2	7~10.5					

Name: Waterproof Connector
Model: 3T-M25-1208H2 3T-M25-1408H2 3T-M25-0808H2
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 65g
Approbations: TUV SAA CE

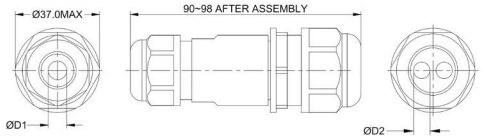

PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 2xΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
3T-M25-1208H2	8~12	5.0~8.3	M25-H2-08	3 or 4 POLE TERMINAL	20~23 25~28	50 60
3T-M25-1408H2	10~14					
3T-M25-0808H2	5~8.1					

Name: Waterproof Connector
Model: 3T-M32-1211H2 3T-M32-1411H2
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 65g
Approbations: TUV SAA CE

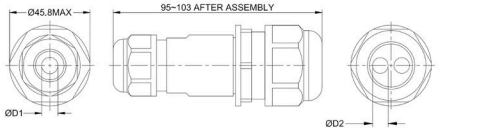

PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 2xΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
3T-M32-1211H2	8~12	8.0~11.5	M32-H2-11	3 or 4 POLE TERMINAL	20~23 40~45	50 80
3T-M32-1411H2	10~14					

Name: Waterproof Connector
Model: 4T-M25-0808H3 4T-M25-1208H3 4T-M25-1408H3
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 65g
Approbations: TUV SAA CE



PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 3xΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
4T-M25-0808H3	5~8.1	5.0~8.0	M25-H3-08	3 or 4 POLE TERMINAL	20~23 25~28	50 60
4T-M25-1208H3	8~12					
4T-M25-1408H3	10~14					

Name: Waterproof Connectort
Model: 4T-M32-1201H2 4T-M32-1408H3
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 80g
Approbations: TUV SAA CE

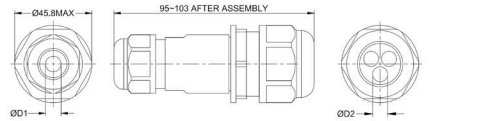

PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 3xΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
4T-M32-1210H3	8~12	7.0~10.5	M32-H3-10	3 or 4 POLE TERMINAL	20~23 40~45	50 80
4T-M32-1410H3	10~14					

Model: 5T-M25-0806H4 5T-M25-1206H4 5T-M25-1406H4
Pole: 3 or 4
Rated Operation Voltage: 400V
Rated Current: 32A
Operation Temprature: -40 ~ 95℃
Colour: Black
IP Rating: IP68
Waterproof depth: 4M
Weight: 65g
Approbations: TUV SAA



PART NUMBER	FOR CABLE ΦD1(MM)	FOR CABLE 4xΦD2(MM)	PART 1	PART 2	TORQUE(Kgf.cm)	DAMAGE TORQUE(Kgf.cm)
5T-M25-0806H4	5~8.1	4.0~6.5	M25-H4-06	3 or 4 POLE TERMINAL	20~23 25~28	50 60
5T-M25-1206H4	8~12					
5T-M25-1406H4	10~14					

Name:Waterproof connectiion plug
Model: S06
Input:max 500V
rated current: 8A
IP Rating: IP68
Applicable Diameter of Cable:5---9mm

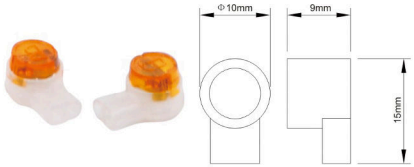

UY2 quick waterproof connector
Use cable 0.2-0.5mm²
not suitable for high voltage

FQ16-2P waterproof extended line

Model:FQ16-2P Waterproof adapter
Approval:CE
Current:10A MAX
Colour:Black
IP Rating:IP67

M20B waterproof Male&Female plug

M20B waterproof Male&Female plug extended line

Model:M20B-2P Tee waterproof connector
M20B-2P waterproof Male&Female plug
Approval:CE
Current:15A MAX
Colour:Black
IP Rating:IP67

Model:M20B-4P Tee waterproof connector
M20B-4P waterproof Male&Female plug
Approval:CE
Current:12A MAX
Colour:Black
IP Rating:IP67

PRODUCT FITTING ACCESSORIES





Model: WJM2/4P
Applied Type:
Voltage:0-250V AC MAX
Electric Current: 6A MAX
Colour: Black
IP Rating: IP68
Applicable Diameter of Cable:5-8mm

Weight:38g
Approbations: CE

Model: WJ-4P
Applied Type:
Voltage:0-250V AC MAX
Electric Current: 10A MAX
Colour: Black
IP Rating: IP68
Applicable Diameter of Cable:6-10mm

Weight:94g
Approbations: CE

Name: Parallel T type three way
waterproof plug connector 2P / 4P
Model: 3T
Input: max 300V
rated current: 13A
IP Rating: IP67
Applicable Diameter of Cable: 5---9mm
Insulator material: Nylon
Connection mode: screw type

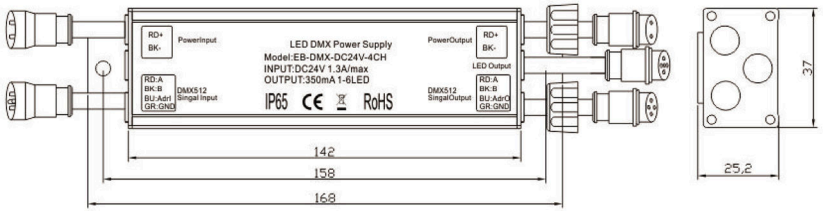

EB-DMX-DC24V-6X1W-4CH
LED DMX Power Supply
Input Voltage:DC24V
Output Current:350mA/CH*4CH
Output Power:1-6W*4CH
Driving quantity:1-6pcs hi-power LED x 4CH
350mA:1-6pcs hi-power 1W LED

EB-DMX-12X1W-4CH
LED DMX Power Supply
Input Voltage:DC48V
Output Current:350mA/CH*4CH
Output Power:10-12W*4CH
Driving quantity:10-12pcs hi-power LED x 4CH
350mA:1-6pcs hi-power 1W LED

DX8
RGB Touch Panel
Input Voltage: 100-240VAC
Output Signal: RF2.4G+DMX512
RF Remote Distance: 30M
Control Mode: 4 Zones Control

PRODUCT FITTING ACCESSORIES

Mini M3+M3-3A

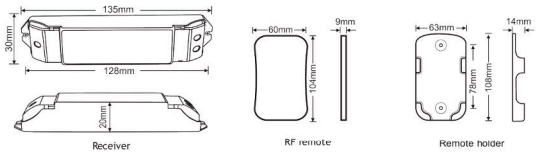

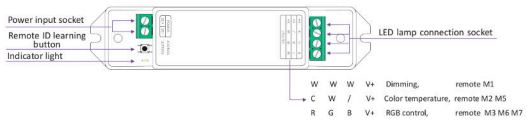

1.Parameter:

Receiver:
Model:M3-3A
Power Input:12-24V DC
Max Current Load: Max 3Ax3CH
Max Output Power: 108W(12V)216W(24V)
Working Temp: -30℃-55℃
Dimensions:L135xW30xH20(mm)
Weight(N.W.)47g
Total Weight(G.W.)135g

Receiver:
Model:M3/M6/M7
Working Voltage:3V(battery CR2032)
Working Frequency:433.92MHz
Remote Distance:30m
Working Temp: -30℃-55℃
Dimensions:L104xW58xH9(mm)
Weight(N.W.)42g

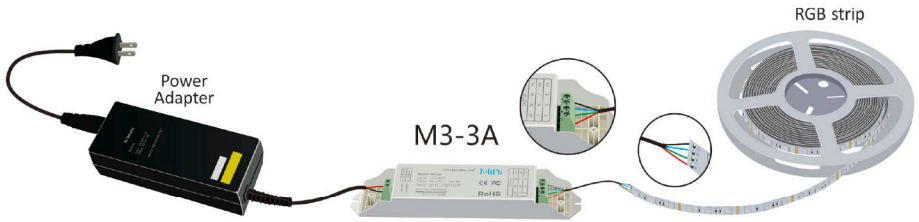

GROUND LIGHT

P07/08 EU1960
P09/10 EU1920
P11/12 EU1965H
P13/14 EU1968
P15/16 BL100
P17/18 GL310
P19/20 GL240
P21/22 GL180
P23/24 GL120
P25/26 GL080
P27/28 GL112
P29/30 GL112H
P31/32 GL116
P33/34 GL116H
P35/36 GL116Q
P37/38 GL116SQ
P39/40 GL118
P41/42 GL118T
P43/44 GL119
P45/46 GL119T
P47/48 GL119CT
P49/50 GL119SQ
P51/52 GL129
P53/54 GL108
P55/56 GL308
P57/58 GL117
P59/60 GL130
P61/62 GL140
P63/64 GL140SQ
P65/66 GL150
P67/68 GL550RGB
P69/70 GL151
P71/72 GL166
P73/74 GL168
P75/76 GL191
P77/78 GL266
P79/80 GL268

FOUNTAIN LIGHT

P83/84 FL410
P85/86 FL411

SPOT LIGHT

P89/90 EU3036
P91/92 EU3040
P93/94 EU3042
P95/96-PL608
P97/98-PL612
P99/100 PL618
P101/102 PL624
P103/104 PL824
P105/106 PL021
P107/108 PL023
P109/110 PL023-2L
P111/112 PL026

LINE LIGHT

P115/116 EU2009
P117/118 EU2009HP
P119/120 EU2001
P121/122 EU2006
P123/124 LL700
P125/126 LL710

LED COMPONENTS

P129/130 LED03
P131/132 LED09

WALL LIGHT

P135/136 EU1808
P137/138 EU1820
P139/140 ML101
P141/142 ML102
P143/144 ML102-L
P145/146 ML103
P147/148 ML104
P149/150 ML105
P151/152 ML110
P153/154 ML110-L

SPIKE LIGHT

P157/158 SL100

P159/160 SL131

P161/162 SL133

QUICK INSTALL LIGHT

P165/166 GL116D-LS

P167/168 GL116DMX-LS

P169/170 GL118RGB-LS

ACCESSORIES

P173 TS130

P173 TS080

P173 TS166

P173 TS140

P173 TS116

P173 TS119

P173 TS119T

P173 TS118

P173 TS118T

P173 TS112

P174 LSVC3A

P174 LMC15W350-Z

P174 LSC6W350

P174 LBC20W350-Z

P174 LIC9W350-Z

P174 APC-35-350

P175
CertaDrive 15W 0.35A 42V

P175
CertaDrive 25W 0.6A 42V

P175 DE-60

P175 EVOS7W350

P176
EIP68-1A EIP68-1B EIP68-1C

P176
EIP68-2A EIP68-2B EIP68-2C

P176
EIP68-3A EIP68-3B EIP68-3C
EIP68-3D

P176
EIP68-3A EIP68-5A EIP68-5B
EIP68-5C EIP68-5D

P177
KJ-PG9-07 KJ-PG9-05

P177
KJ-PG9-08

P177
KJ-M20S-07 KJ-M20S-11 KJ4-M20S-0711
KJ4-M20S-07 KJ4-M20S-11

P177
KJ-M25S-08 KJ-M25S-10
KJ-M25S-12 KJ-M25S-1214

P177
KJ5-M25S-08 KJ5-M25S-10
KJ5-M25S-12 KJ5-M25S-1214

P178
3T-M20-0806H2 3T-M20-1006H2

P178
3T-M25-1208H2 3T-M25-1408H2
3T-M25-0808H2

P178
3T-M32-1210H2 3T-M32-1411H2

P178
4T-M25-0808H3 4T-M25-1208H3
4T-M25-1408H3

P178
4T-M32-1201H2 4T-M32-1408H3

P179
5T-M25-0806H4 5T-M25-1206H4
5T-M25-1406H4

P179 S-60

P179 UY2

P179 FQ16-2P

P179 M20B

P180 WJM2/4P

P180 WJ-4P

P180 3T

P180
EB-DMX-DC24V-6X1W-4CH

P180
EB-DMX-12X1W-4CH

P181 DX8

P182 M3-3A

samui phangan real estate

BUYING • RENOVATING INVESTING • LIVING

CALLISTO VILLAS
Unsurpassed Eco Friendly Luxury

Outdoor Living Trends For 2015

Seara **Sports**
Your Only Fitness Solution